

Rittal – The System.

Faster – better – everywhere.

▶ TS punched sections without mounting flanges, 45 x 88 mm – TS 8612.660

Date : Mar 20, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



TS punched sections without mounting flanges, 45 x 88 mm – TS 8612.660

created: 20.03.2018 on www.rittal.com/com-en

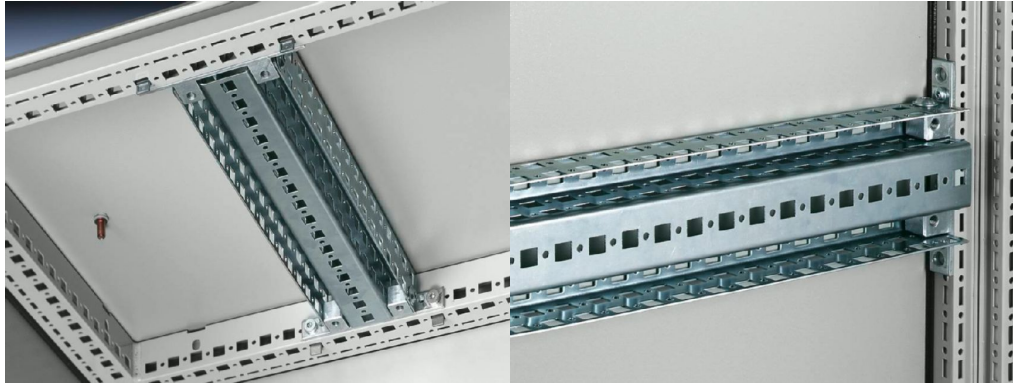

Product description

Design: for the inner mounting level

Description: Heavy top-mounted equipment mounted directly on the internal surfaces (e.g. roof) is supported. Mounted on the side or rear, the enclosure can then be screw-fastened securely to the machine. The twin profile with 11 rows of holes offers numerous additional opportunities for interior installation.

Material: Sheet steel

Surface finish: Zinc-plated

Supply includes: Assembly parts

Product features

To fit: Enclosure type: the inner mounting level
Width/depth: 600 mm

Installation options: On the vertical and horizontal TS, SE enclosure section

Packs of: 2 pc(s).

Weight/pack: 3 kg

EAN: 4028177267060

Customs tariff number:	73269098
ETIM 6.0:	EC002625
ETIM 5.0:	EC002625
eCl@ss 8.0/8.1:	27189234
eCl@ss 7.0/7.1:	23159101
eCl@ss 6.0/6.1:	23159101
eCl@ss 5.1/5.1.4:	27189250
Product description (long):	TS TS punched section without mounting flange, 45 x 88 mm, for inner mounting level: for WD: 600 mm
Approvals	
Certificates:	EAC