

Rittal – The System.

Faster – better – everywhere.

Punched section with mounting flange, 23 x 64 mm for VX – VX 8617.150

Date : Jul 25, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Punched section with mounting flange, 23 x 64 mm for VX – VX 8617.150

created: 25.07.2018 on www.rittal.com/com-en

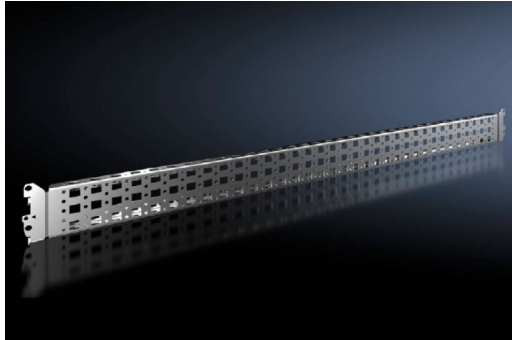

Product description

Description:	For variable, individual interior installation of the enclosure frame on the inner mounting level.
Benefits:	Simply locate into the system punchings and screw-fasten. System punchings on all four sides. With slots at the top and bottom for cage nuts, for attaching your own components via metric screws
Material:	Sheet steel
Surface finish:	Zinc-plated
Supply includes:	Assembly parts

Product features

To fit:	Width/height/depth: 1000 mm
Installation options:	Base/plinth VX in the width and depth, combined with an base/plinth installation bracket On identical punched sections with mounting flanges
Packs of:	4 pc(s).
Weight/pack:	4.22 kg
EAN:	4028177829152

Customs tariff number:	94039010
ETIM 6.0:	EC002625
ETIM 5.0:	EC002625
eCl@ss 8.0/8.1:	27189234
eCl@ss 7.0/7.1:	23159101
eCl@ss 6.0/6.1:	23159101
eCl@ss 5.1/5.1.4:	27189250
Product description (long):	VX Punched section, with mounting flange 23 x 64 mm, for inner mounting level