

Rittal – The System.

Faster – better – everywhere.

► Punched rail 18 x 39 mm for VX, TS, SE – VX 8617.730

Date : Aug 1, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Punched rail 18 x 39 mm for VX, TS, SE – VX 8617.730

created: 01.08.2018 on www.rittal.com/com-en

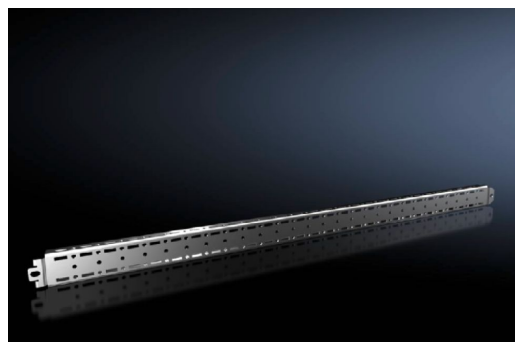

Product description

Description:	For variable, individual interior installation of the enclosure frame on the inner mounting level.
Benefits:	May also be used in conjunction with other punched sections Prepared at the rear to accommodate cable ties for optimum cable routing inside the enclosure Simply insert into the system punchings, even with the mounting panel in its rearmost position
Material:	Sheet steel
Surface finish:	Zinc-plated
Supply includes:	Assembly parts
Note:	In enclosures with a mounting plate, 2 punched rails are already included with the supply.

Product features

To fit:	Width/depth: 800 mm
Installation options:	On the horizontal and vertical VX enclosure section, on the inner mounting level
Packs of:	4 pc(s).
Weight/pack:	3.7 kg
EAN:	4028177921733

Customs tariff number:	73269098
ETIM 6.0:	EC002625
ETIM 5.0:	EC002625
eCl@ss 8.0/8.1:	27189234
eCl@ss 7.0/7.1:	27189234
eCl@ss 6.0/6.1:	27189234
eCl@ss 5.1/5.1.4:	27189234
Product description (long):	VX Punched rail 18 x 38 mm, for W/D: 800 mm