

Rittal – The System.

Faster – better – everywhere.

► **Punched section with
mounting flange, 14 x
39 mm for tubular
door frame – VX
8619.730**

Date : Nov 6, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Punched section with mounting flange, 14 x 39 mm for tubular door frame VX, TS, SE – VX 8619.730

created: 06.11.2018 on www.rittal.com/com-en

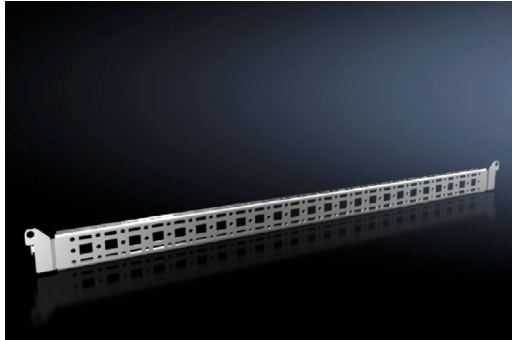

Product description

| | |
|-------------------------|---|
| Description: | Simple location and fast mounting on the tubular door frame. |
| Applications: | For attachment of Cable ducts Cable conduit holder Equipment installed on the door |
| Material: | Sheet steel |
| Surface finish: | Zinc-plated |
| Supply includes: | Assembly parts |
| Note: | For installing your own components on the punched section with mounting flange, metal screws or self-tapping M5 screws are required |

Product features

| | |
|---------------------------|---------------|
| To fit door width: | 800 mm |
| Packs of: | 4 pc(s). |
| Weight/pack: | 1.6 kg |
| EAN: | 4028177924666 |
| Customs tariff | 73269098 |

| | |
|------------------------------------|---|
| number: | |
| ETIM 6.0: | EC002625 |
| ETIM 5.0: | EC002625 |
| eCl@ss 8.0/8.1: | 27189234 |
| eCl@ss 7.0/7.1: | 27189234 |
| eCl@ss 6.0/6.1: | 23159101 |
| eCl@ss 5.1/5.1.4: | 27189250 |
| Product description (long): | VX Punched section, with mounting flange 14 x 39 mm, for door width: 800 mm |