


Thermostats

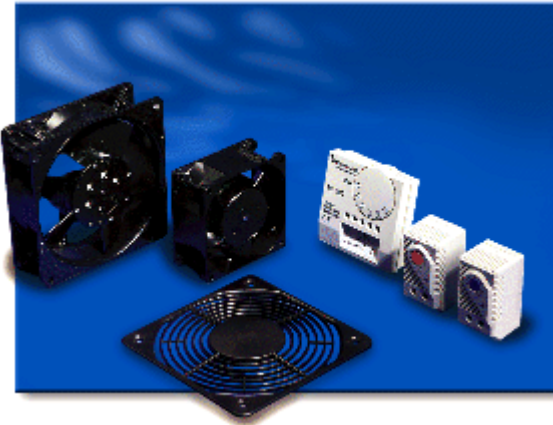

FAN KL 50
 FAN KL 100
 Thermostats
 Hygrostat

Technical data	TH 100	TS 60	TO 60
Switching system	Bimetallic strip with thermal feedback, radio interference N (VDE 0875)	Bimetallic strip, radio interference N (VDE 0875)	
Contact	1 changeover switch (quick-acting contact)	1 NO contact (quick- acting contact)	1 NC contact (quick- acting contact)
Switching current (250V AC)	ohmic (inductive) load Heating (NC) 10 (4) A Cooling (NO) 5(2) A	ohmic (inductive) load 6 (1) A	
Setting range	10 - 60°C Limiting the temperature range possible under the control knob	0 - 60°C	
Switching hysteresis	approx. 2K (with thermal feedback)	approx. 5K	
Dimensions (W x H x D)	74 x 74 x 31 mm	33 x 60 x 35 mm	