


GV2ME10AE11

motor circuit breaker GV2-ME - 4...6.3 A - 3 3d
- thermal magnetic trip unit

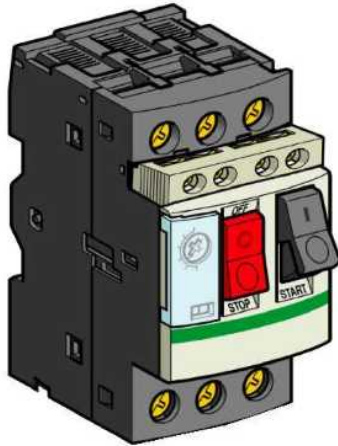

Main

| | |
|-------------------------------------|---|
| Range of product | GV2ME |
| Device short name | Thermal magnetic circuit breaker |
| Product or component type | Circuit breaker |
| Circuit breaker application | Motor protection |
| Poles description | 3P |
| Network type | AC |
| Control type | Pushbutton |
| Motor power kW | 3 kW at 500 V AC 50/60 Hz 4 kW at 690 V AC 50/60 Hz 2.2 kW at 400/415 V AC 50/60 Hz |
| [In] rated current | 6.3 A (-20...60 °C) 6.3 A (-20...40 °C) |
| Magnetic tripping current | 78 A |
| Thermal protection adjustment range | 4...6.3 A conforming to IEC 60947-4-1 |
| Suitability for isolation | Yes conforming to IEC 60947-1 § 7-1-6 |
| Utilisation category | AC-3 conforming to IEC 60947-4-1 Category A conforming to IEC 60947-2 |
| Connections - terminals | Power circuit: screw clamp terminal 2 cable 1...6 mm ² - cable stiffness: solid Power circuit: screw clamp terminal 2 cable 1.5...6 mm ² - cable stiffness: flexible - without cable end Power circuit: screw clamp terminal 2 cable 1...4 mm ² - cable stiffness: flexible - with cable end |

Complementary

| | |
|--|--|
| Network frequency | 50/60 Hz |
| Mounting mode | Fixed |
| Mounting support | Plate Rail |
| Mounting position | Horizontal Vertical |
| Auxiliary contacts available on each contactor | 1 NO + 1 NC front |
| Trip unit technology | Thermal-magnetic |
| Phase failure sensitivity | Yes conforming to IEC 60947-4-1 § 7-2-1-5-2 |
| [Ue] rated operational voltage | 600 V AC 50/60 Hz conforming to CSA C22-2 No 14 600 V AC 50/60 Hz conforming to UL 508 690 V conforming to IEC 60947-2 AC 50/60 Hz |
| [Ui] rated insulation voltage | 600 V AC 50/60 Hz conforming to CSA C22-2 No 14 600 V AC 50/60 Hz conforming to UL 508 690 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Ith] conventional free air thermal current | 6.3 A conforming to IEC 60947-4-1 |
| Network frequency | 50/60 Hz conforming to CSA 50/60 Hz conforming to CSA C22-2 No 14 50/60 Hz conforming to UL |
| [Uimp] rated impulse withstand voltage | 6 kV conforming to IEC 60947-2 |
| Power dissipation per pole | 2.5 W |
| Mechanical durability | 100000 cycles |
| Electrical durability | 100000 cycles on AC-3 at 440 V In 100000 cycles on AC-3 at 440 V In/2 |
| Maximum number of switchings | 25 cyc/h |

| | |
|---|---|
| Rated duty | Continuous conforming to IEC 60947-4-1 |
| Tightening torque | 1.7 N.m - on screw clamp terminal - cable 1...6 mm ² 1.7 N.m - on screw clamp terminal - cable 1.5...6 mm ² 1.7 N.m - on screw clamp terminal - cable 1...4 mm ² |
| Breaking capacity | < 100 kA lcu conforming to IEC 60947-2 at 230/240 V AC 50/60 Hz < 100 kA lcu conforming to IEC 60947-2 at 400/415 V AC 50/60 Hz 3 kA lcu conforming to IEC 60947-2 at 690 V AC 50/60 Hz 50 kA lcu conforming to IEC 60947-2 at 440 V AC 50/60 Hz 50 kA lcu conforming to IEC 60947-2 at 500 V AC 50/60 Hz |
| [Ics] rated service short-circuit breaking capacity | < 100 % conforming to IEC 60947-2 at 230/240 V AC 50/60 Hz < 100 % conforming to IEC 60947-2 at 400/415 V AC 50/60 Hz 100 % conforming to IEC 60947-2 at 440 V AC 50/60 Hz 100 % conforming to IEC 60947-2 at 500 V AC 50/60 Hz 75 % conforming to IEC 60947-2 at 690 V AC 50/60 Hz |
| Height | 101 mm |
| Width | 44.5 mm |
| Depth | 78.2 mm |
| Product weight | 0.26 kg |

Environment

| | |
|---------------------------------------|--|
| Standards | CSA C22-2 No 14-05 EN 60204 IEC 60947-1 IEC 60947-2 IEC 60947-4-1 NF C 63-120 NF C 63-650 NF C 79-130 UL 508 VDE 0113 VDE 0660 |
| Product certifications | ATEX BV CCC CEBEC CSA DNV (Det Norske Veritas) EZU GL GOST LROS (Lloyds register of shipping) PTB RINA SETI TSE UL |
| Protective treatment | TH |
| IP degree of protection | IP20 open mounted conforming to IEC 60529 |
| Shock resistance | 30 gn 11 ms conforming to IEC 60068-2-27 |
| Vibration resistance | 5 gn 5...150 Hz conforming to IEC 60068-2-6 |
| Ambient air temperature for operation | -20...60 °C open mounted -20...40 °C in enclosure |
| Ambient air temperature for storage | -40...80 °C |
| Fire resistance | 960 °C conforming to IEC 60695-2-1 |
| Operating altitude | <= 2000 m |
| Resistance to mechanical impact | 0.5 J |