



### Main

|                           |   |
|---------------------------|---|
| Commercial Status         | Commercialised  |
| Range of product          | Modicon M241  |
| Product or component type | Logic controller  |
| Discrete input number     | 14 discrete input including 8 fast input conforming to IEC 61131-2 Type 1   |
| Discrete output type      | Transistor  |
| Discrete output number    | 10 transistor including 4 fast output   |
| Discrete output voltage   | 24 V DC for transistor output   |
| Discrete output current   | 0.1 A with Q0...Q3 terminal(s) for fast output (PTO mode)<br>0.5 A with Q0...Q9 terminal(s) for transistor output |
| [Us] rated supply voltage | 24 V DC   |

### Complementary

|                                |   |
|--------------------------------|---|
| Discrete I/O number            | 24  |
| Discrete input logic           | Sink or source  |
| Discrete input voltage         | 24 V  |
| Discrete input voltage type    | DC  |
| Voltage state1 guaranteed      | $\geq 15$ V for input   |
| Current state 1 guaranteed     | $\geq 5$ mA for fast input<br>$\geq 2.5$ mA for input   |
| Voltage state 0 guaranteed     | $\leq 5$ V for input  |
| Current state 0 guaranteed     | $\leq 1.5$ mA for fast input<br>$\leq 1$ mA for input   |
| Discrete input current         | 10.7 mA for fast input<br>5 mA for input  |
| Input impedance                | 2.81 kOhm for fast input<br>4.7 kOhm for input  |
| Response time                  | $\leq 2$ $\mu$ s turn-off operation with Q0...Q3 terminal(s) for fast output<br>$\leq 2$ $\mu$ s turn-on operation with Q0...Q3 terminal(s) for fast output<br>$\leq 250$ $\mu$ s turn-off operation with Q0...Q9 terminal(s) for output<br>$\leq 34$ $\mu$ s turn-on operation with Q0...Q9 terminal(s) for output<br>$\leq 2$ $\mu$ s turn-off operation with I0...I7 terminal(s) for fast input<br>$\leq 2$ $\mu$ s turn-on operation with I0...I7 terminal(s) for fast input<br>50 $\mu$ s turn-off operation with I0...I13 terminal(s) for input<br>50 $\mu$ s turn-on operation with I0...I13 terminal(s) for input |
| Configurable filtering time    | 12 ms for input<br>4 ms for input<br>1 ms for input<br>0 ms for input<br>12 ms for fast input<br>1 $\mu$ s for fast input   |
| Number of I/O expansion module | 14 (remote I/O architecture)<br>7 (local I/O architecture)  |
| Discrete output logic          | Positive logic (source)   |
| Output voltage limits          | 30 V DC   |
| Output frequency               | $\leq 1$ kHz for output<br>$\leq 100$ kHz for fast output (PLS mode)<br>$\leq 20$ kHz for fast output (PWM mode)  |
| Accuracy                       | $\pm 1$ % at 100 Hz...1 kHz for fast output<br>$\pm 0.1$ % at 20...100 Hz for fast output   |
| Leakage current                | $\leq 5$ $\mu$ A for output   |
| Voltage drop                   | $\leq 1$ V  |

|                                   |  |
|-----------------------------------|--|
| Tungsten load                     | <= 2.4 W   |
| Protection type                   | Reverse polarity protection for fast output<br>Short-circuit and overload protection with automatic reset<br>Short-circuit protection  |
| Reset time                        | 12 s fast output<br>10 ms output   |
| Current per output common         | 1 A with Q8...Q9 terminal for output<br>2 A with Q4...Q7 terminal for output<br>2 A with Q0...Q3 terminal for fast output  |
| Execution time for 1 KInstruction | 0.7 ms for other instruction<br>0.3 ms for event and periodic task   |
| Memory capacity                   | 64 MB for system memory RAM<br>8 MB for program  |
| Data backed up                    | 128 MB built-in flash memory for backup of user programs   |
| Data storage equipment            | <= 32 GB SD card optional  |
| Battery type                      | BR2032 lithium non-rechargeable, battery life: 4 yr  |
| Backup time                       | 2 years at 25 °C   |
| Application structure             | 8 event tasks<br>4 cyclic master tasks<br>3 cyclic master tasks + 1 freewheeling task<br>8 external event tasks  |
| Realtime clock                    | With   |
| Clock drift                       | <= 60 s/month at 25 °C   |
| Positioning functions             | PWM/PTO function 4 channel(s) (positioning frequency: 100 kHz)   |
| Control signal type               | Single phase signal at 200 kHz for fast input (HSC mode)<br>Pulse/Direction signal at 200 kHz for fast input (HSC mode)<br>A/B signal at 100 kHz for fast input (HSC mode)   |
| Counting input number             | 4 fast input (HSC mode)  |
| Integrated connection type        | CANopen with connector male SUB-D 9<br>Ethernet with connector RJ45<br>USB port with connector mini B USB 2.0<br>Non isolated serial link "serial 2" with connector removable screw terminal block and interface RS485<br>Non isolated serial link "serial 1" with connector RJ45 and interface RS232/RS485  |
| Supply                            | Serial link supply "serial 1" at 5 V, 200 mA   |
| Port Ethernet                     | 1 - 10BASE-T/100BASE-TX port with copper cable support   |
| Web services                      | Web server   |
| Ethernet services                 | FTP server<br>SNMP<br>DHCP client<br>Ethernet/IP adapter<br>Modbus TCP server<br>Modbus TCP client<br>IEC VAR ACCESS<br>Modbus TCP slave device  |
| Transmission rate                 | 20 kbit/s for bus length of 2500 m - communication protocol: CANopen<br>50 kbit/s for bus length of 1000 m - communication protocol: CANopen<br>125 kbit/s for bus length of 500 m - communication protocol: CANopen<br>250 kbit/s for bus length of 250 m - communication protocol: CANopen<br>500 kbit/s for bus length of 100 m - communication protocol: CANopen<br>800 kbit/s for bus length of 40 m - communication protocol: CANopen<br>1000 kbit/s for bus length of 20 m - communication protocol: CANopen<br>10/100 Mbit/s - communication protocol: Ethernet<br>480 Mbit/s for bus length of 3 m - communication protocol: USB<br>1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m - communication protocol: RS232<br>1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m - communication protocol: RS485 |
| Communication port protocol       | Modbus non isolated serial link with master/slave method   |
| Supply voltage limits             | 20.4...28.8 V  |
| Inrush current                    | <= 50 A  |
| Power consumption in W            | 32.6...40.4 W  |
| Cable length                      | <= 3 m shielded cable for fast output<br><= 50 m unshielded cable for output<br><= 10 m shielded cable for fast input<br><= 50 m unshielded cable for input  |

|                               |   |
|-------------------------------|---|
| Local signalling              | <p>1 LED green for CANopen error</p> <p>1 LED green for CANopen run</p> <p>1 LED green for Ethernet port activity</p> <p>1 LED per channel green for I/O state</p> <p>1 LED red for bus fault on TM4 (TM4)</p> <p>1 LED green for SL2</p> <p>1 LED green for SL1</p> <p>1 LED red for BAT</p> <p>1 LED green for SD card access (SD)</p> <p>1 LED red for I/O error (I/O)</p> <p>1 LED red for module error (ERR)</p> <p>1 LED green for RUN</p> <p>1 LED green for PWR</p>             |
| Electrical connection         | <p>Removable screw terminal block for connecting the 24 V DC power supply (pitch 5.08 mm)</p> <p>Removable screw terminal block for inputs and outputs (pitch 5.08 mm)</p>  |
| Insulation                    | <p>500 V AC between fast output and internal logic</p> <p>Non-insulated between outputs</p> <p>500 V AC between output and internal logic</p> <p>500 V AC between fast input and internal logic</p> <p>Non-insulated between inputs</p> <p>500 V AC between input and internal logic</p> <p>Non-insulated between supply and ground</p> <p>500 V AC between supply and internal logic</p>   |
| Marking                       | CE  |
| Surge withstand               | <p>1 kV for transistor output in common mode conforming to EN/IEC 61000-4-5</p> <p>1 kV for input in common mode conforming to EN/IEC 61000-4-5</p> <p>1 kV for relay output in differential mode conforming to EN/IEC 61000-4-5</p> <p>0.5 kV for power lines (DC) in differential mode conforming to EN/IEC 61000-4-5</p> <p>1 kV for shielded cable in common mode conforming to EN/IEC 61000-4-5</p> <p>1 kV for power lines (DC) in common mode conforming to EN/IEC 61000-4-5</p> |
| Maximum number of connections | <p>8 connection(s) for Modbus server</p> <p>16 connection(s) for Ethernet/IP device</p>   |
| CANopen feature profile       | <p>DR 303-1</p> <p>DS 301 V4.02</p>   |
| Number of slave               | <= 63 CANopen   |
| Mounting support              | <p>Plate or panel with fixing kit</p> <p>Top hat type TH35-7.5 rail conforming to IEC 60715</p> <p>Top hat type TH35-15 rail conforming to IEC 60715</p>  |
| Height                        | 90 mm   |
| Depth                         | 95 mm   |
| Width                         | 150 mm  |
| Product weight                | 0.53 kg   |

## Environment


|   |  |
|---|--|
| Standards   | <p>CSA C22.2 No 142</p> <p>UL 1604</p> <p>UL 508</p> <p>ANSI/ISA 12-12-01</p> <p>CSA C22.2 No 213</p> <p>EN/IEC 61131-2 : 2007</p> <p>Marine specification (LR, ABS, DNV, GL)</p>  |
| Product certifications  | <p>CSA</p> <p>CULus</p> <p>IACS E10</p> <p>RCM</p>   |
| Resistance to electrostatic discharge                                   | <p>4 kV on contact conforming to EN/IEC 61000-4-2</p> <p>8 kV in air conforming to EN/IEC 61000-4-2</p>  |
| Resistance to electromagnetic fields                                    | <p>1 V/m (2 GHz...3 GHz) conforming to EN/IEC 61000-4-3</p> <p>3 V/m (1.4 GHz...2 GHz) conforming to EN/IEC 61000-4-3</p> <p>10 V/m (80 MHz...1 GHz) conforming to EN/IEC 61000-4-3</p>  |
| Resistance to fast transients   | <p>1 kV for transistor output conforming to EN/IEC 61000-4-4</p> <p>1 kV for input conforming to EN/IEC 61000-4-4</p> <p>1 kV for serial link conforming to EN/IEC 61000-4-4</p> <p>1 kV for Ethernet line conforming to EN/IEC 61000-4-4</p> <p>2 kV for power lines conforming to EN/IEC 61000-4-4</p> |
| Resistance to conducted disturbances, induced by radio frequency fields | <p>10 V (spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz)) conforming to Marine specification (LR, ABS, DNV, GL)</p> <p>3 V (0.1...80 MHz) conforming to Marine specification (LR, ABS, DNV, GL)</p> <p>10 V (0.15...80 MHz) conforming to EN/IEC 61000-4-6</p>                          |

|                                       |   |
|---------------------------------------|---|
| Electromagnetic emission              | Radiated emissions, test level: 47 dB $\mu$ V/m QP with class A (radio frequency: 230 MHz...1 GHz) conforming to EN/IEC 55011<br>Radiated emissions, test level: 40 dB $\mu$ V/m QP with class A (radio frequency: 30...230 MHz) conforming to EN/IEC 55011<br>Conducted emissions, test level: 63 dB $\mu$ V/m QP, condition of test: power lines (radio frequency: 1.5...30 MHz) conforming to EN/IEC 55011<br>Conducted emissions, test level: 79...63 dB $\mu$ V/m QP, condition of test: power lines (radio frequency: 150 kHz...1.5 MHz) conforming to EN/IEC 55011<br>Conducted emissions, test level: 120...69 dB $\mu$ V/m QP, condition of test: power lines (radio frequency: 10...150 kHz) conforming to EN/IEC 55011 |
| Immunity to microbreaks               | 10 ms   |
| Ambient air temperature for operation | -10...55 °C for horizontal installation<br>-10...50 °C for vertical installation  |
| Ambient air temperature for storage   | -25...70 °C   |
| Relative humidity                     | 10...95 % without condensation in storage<br>10...95 % without condensation in operation  |
| IP degree of protection               | IP20 with protective cover in place   |
| Pollution degree                      | 2   |
| Operating altitude                    | 0...2000 m  |
| Storage altitude                      | 0...3000 m  |
| Vibration resistance                  | 3 gn (vibration frequency: 8.4...150 Hz) on panel mounting<br>3.5 mm (vibration frequency: 5...8.4 Hz) on panel mounting<br>3 gn (vibration frequency: 8.4...150 Hz) on symmetrical rail<br>3.5 mm (vibration frequency: 5...8.4 Hz) on symmetrical rail  |
| Shock resistance                      | 15 gn for 11 ms   |


### Offer Sustainability

|                          |   |
|--------------------------|---|
| Sustainable offer status | Not Green Premium product   |
| RoHS                     | Compliant - since 1330 - <a href="#">Schneider Electric declaration of conformity</a> |


Dimensions

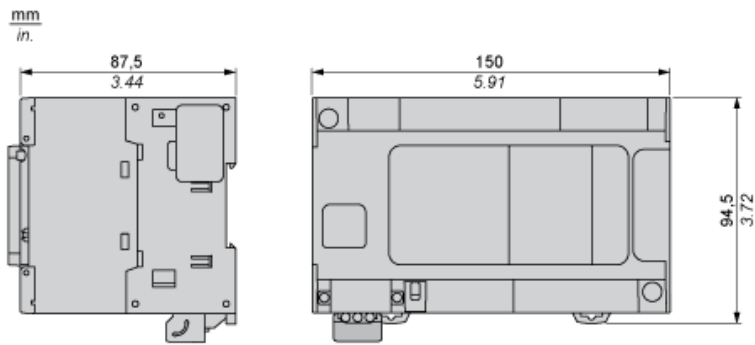


Clearance

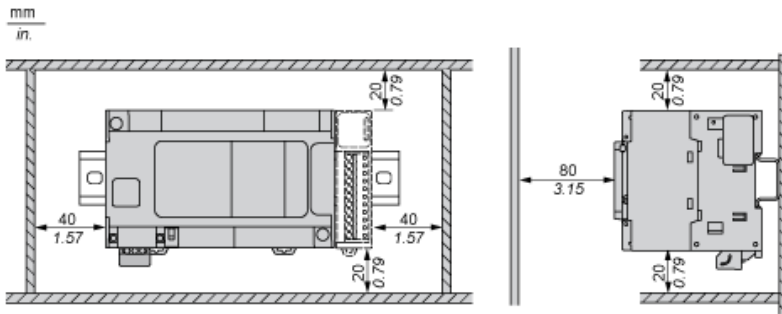

Mounting Position

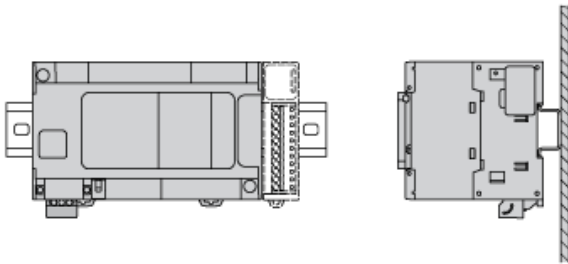


Acceptable Mounting



NOTE: Expansion modules must be mounted above the logic controller.

Incorrect Mounting

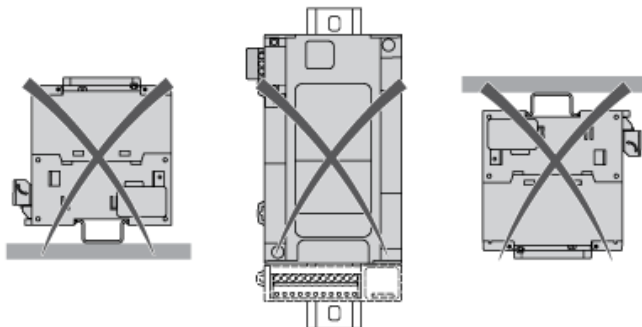


Direct Mounting On a Panel Surface

# Mounting Hole Layout


mm  
in.

M4 x 6/8 mm  
0.24/0.31 in.

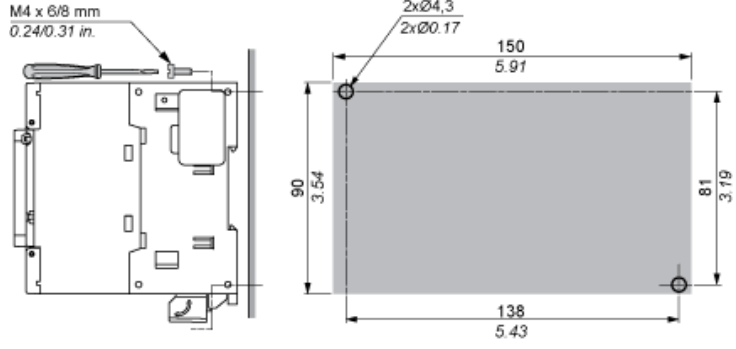


Digital Inputs

Wiring Diagram

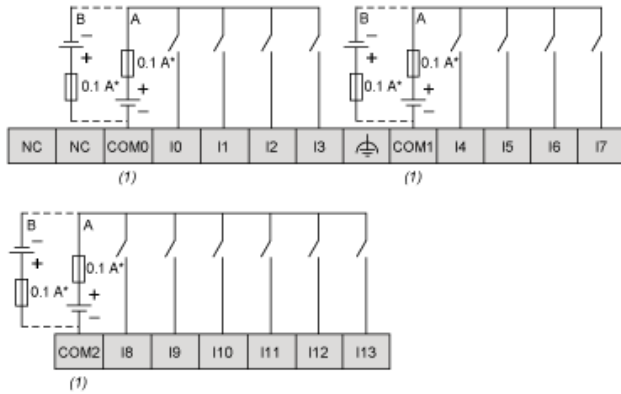


- (\*) : Type T fuse
- (1) : The COM0, COM1 and COM2 terminals are not connected internally
- (A) : Sink wiring (positive logic)
- (B) : Source wiring (negative logic)

Fast Input Wiring (I0...I7)



Fast Transistor Outputs


Wiring Diagram



- (\*) : Type T fuse
- (1) The VO+, V1+, V2+ and V3+ terminals are not connected internally.
- (2) The VO-, V1-, V2- and V3- terminals are not connected internally.

Transistor Outputs


Wiring Diagram

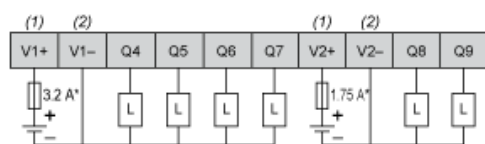


- (\*) : Type T fuse
- (1) : The V1+ and V2+ terminals are not connected internally.
- (2) : The V1- and V2- terminals are not connected internally.

USB Mini-B Connection



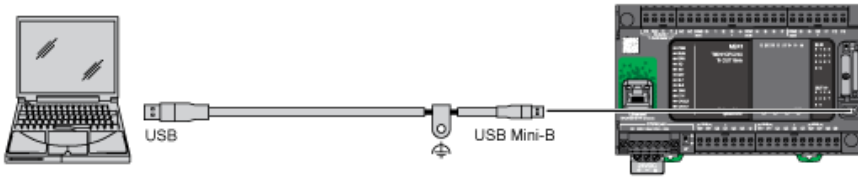


## Ethernet Connection to a PC

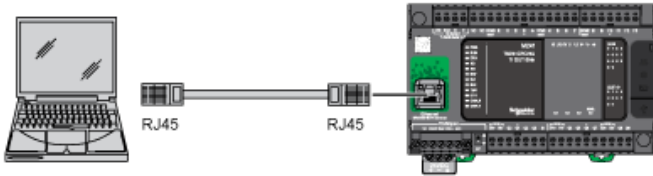

## CANopen Connection

### Wiring Diagram



| Pin | Signal   | Description                    | Marking | Color of Cable |
|-----|----------|--------------------------------|---------|----------------|
| 1   | Not used | Reserved                       | NC      | red            |
| 2   | CAN_H    | CAN_H bus line (dominant high) | CAN_H   | white          |
| 3   | CAN_SHLD | Optional CAN shield            | Shield  | -              |
| 4   | CAN_L    | CAN_L bus line (dominant low)  | CAN_L   | blue           |
| 5   | CAN_GND  | CAN Ground                     | GND     | black          |