






LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 000, 16A, AC 500V/DC 250V

Similar to image

Technical data:



Current / for AC / rated value	A	16
Operating class of the fuse link		gG
Size of the fallback-system / acc. to DIN EN 60269-1		NH000
Supply voltage		
• for AC / rated value	V	500
• for DC	V	250
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	120
• with DC / in accordance with IEC 60947-2 / rated value	kA	25
Design of an identification indicator		Front indicators
type of the assembly		Non-insulated grip lugs
Protection class IP		IP20, with connected conductors
Climatic class		-20 to +50 at 95% relative humidity
Ambient temperature		
• minimum	°C	-5
• maximum	°C	40
Product description		Using screw adapter or adapter sleeves

Certificates/approvals:

General Product Approval		Declaration of Conformity	Test Certificates	
 VDE		 EG-Konf.	Special Test Certificate	Type Test Certificates/Test Report
Shipping Approval	other			
 GL	Environmental Confirmations			

Further information:

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/lowvoltage/catalogs>
-
- Industry Mall (Online ordering system)**
<http://www.siemens.com/lowvoltage/mall>
-
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<http://support.automation.siemens.com/WW/view/en/3NA3805/all>
-
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3805
-
- CAX-Online-Generator**
<http://www.siemens.com/cax>
-
- Tender specifications**
[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

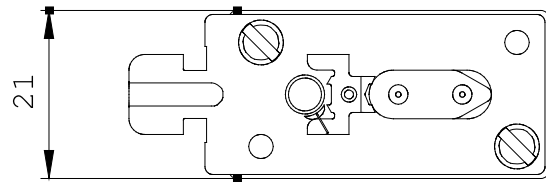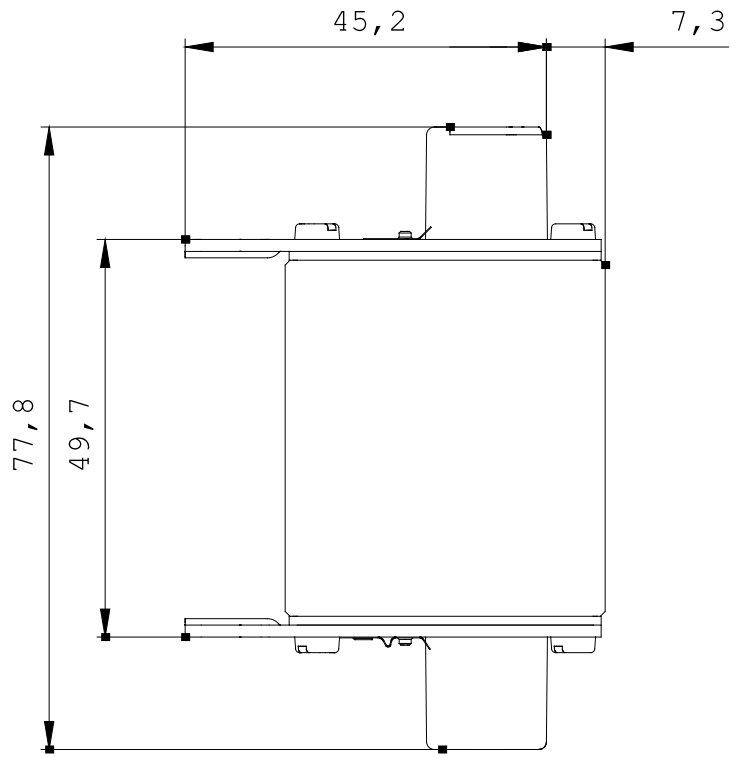

last change:

Jul 1, 2013