# SIEMENS

LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP
LUGS WITH FRONT INDICATOR SIZE 000,
32A, AC 500V/DC 250V

Similar to image

| Technical data: | | |
|---|---|---|
| **product brand name** | | SENTRON |
| **Product designation** | | LV HRC fuse link |
| **Current / for AC / rated value** | A | 32 |
| **Operating class of the fuse link** | | gG |
| **Size of the fallback-system / acc. to DIN EN 60269-1** | | NH000 |
| **Supply voltage** | | |
| • for AC / rated value | V | 500 |
| • for DC | V | 250 |
| **Switching capacity current** | | |
| • in accordance with IEC 60947-2 / rated value | kA | 120 |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 25 |
| **Design of the fuse link** | | LV HRC fuse link |
| **Design of an identification indicator** | | Front indicators |
| **Mounting type** | | Non-insulated grip lugs |
| **mounting position** | | Any, preferably vertical |
| **Protection class IP** | | IP20, with connected conductors |
| **Climatic class** | | -20 to +50 at 95% relative humidity |
| **Ambient temperature** | °C | -5 … +40 |

| Ambient temperature / during storage / note | | Air humidity 90% at 20 °C |
|---|---|---|
| **Product description** | | Using screw adapter or adapter sleeves |
| **Design of the switching contact** | | Non-corroding, silver-plated |
| **Net weight** | g | 130 |
| **Item designation** | | |
| • according to DIN EN 61346-2 | | F |
| • according to DIN EN 81346-2 | | F |

## Certificates/approvals:

| General Product Approval | | | | Declaration of Conformity |
|---|---|---|---|---|
| CSA | GOST | KEMA | VDE | EG-Konf. |

| Test Certificates | | Shipping Approval | other |
|---|---|---|---|
| Special Test Certificate | Type Test Certificates/Test Report | GL | Environmental Confirmations |

## Further information:

**Information- and Downloadcenter (Catalogs, Brochures,…)**
http://www.siemens.com/lowvoltage/catalogs

**Industry Mall (Online ordering system)**
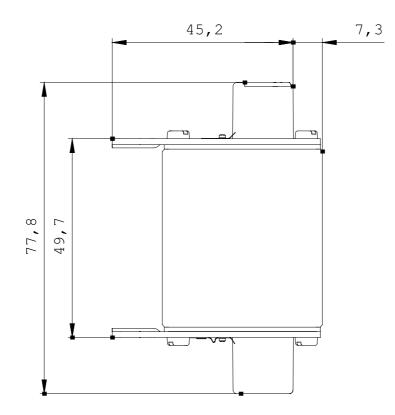https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NA3812

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
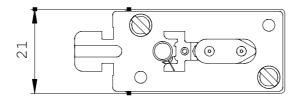http://support.automation.siemens.com/WW/view/en/3NA3812/all

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3812

**CAx-Online-Generator**
http://www.siemens.com/cax

**Tender specifications**
Datanorm GAEB81 GAEB83 RTF TXT

45,2

7,3

77,8

49,7

21

**last change:**                                        Apr 21, 2014