



FUSE LINK CLASS CC ACC. TO UL STANDARD 248-4
SLOW-BLOW RATED CURRENT 1.5 A RATED VOLTAGE
UP TO 600 V AC SIZE 10.3 MM X 38.1 MM

Similar to image

Technical data:

| | | |
|--|----|--------------|
| product brand name | | SETRON |
| Product designation | | Fuse systems |
| Operating current / rated value | A | 1.5 |
| Operating class of the fuse link | | CC |
| Tripping characteristic class | | Time-lag |
| Size of the fallback-system / acc. to DIN EN 60269-1 | | others |
| Operating voltage / rated value | V | 600 |
| Breaking capacity maximum short-circuit current (I_{cu}) / with AC / rated value | kA | 200 |
| Color coding of the fuse link | | others |
| Item designation | | |
| <ul style="list-style-type: none"> • according to DIN EN 61346-2 • according to DIN EN 81346-2 | | F F |

Certificates/approvals:

General Product Approval



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NW1015-0HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NW1015-0HG/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW1015-0HG

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

Datanorm [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

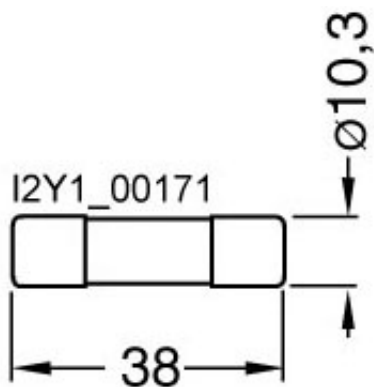

last change:

Apr 21, 2014