



FUSE LINK CLASS CC ACC. TO UL STANDARD 248-4  
SLOW-BLOW RATED CURRENT 3 A RATED VOLTAGE  
UP TO 600 V AC SIZE 10.3 MM X 38.1 MM

Similar to image

#### Technical data:

<b>product brand name</b>		SETRON
<b>Product designation</b>		Fuse systems
<b>Operating current / rated value</b>	A	3
<b>Operating class of the fuse link</b>		CC
<b>Tripping characteristic class</b>		Time-lag
<b>Size of the fallback-system / acc. to DIN EN 60269-1</b>		others
<b>Operating voltage / rated value</b>	V	600
<b>Breaking capacity maximum short-circuit current (I<sub>cu</sub>) / with AC / rated value</b>	kA	200
<b>Color coding of the fuse link</b>		others
<b>Item designation</b>		
<ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> <li>• according to DIN EN 81346-2</li> </ul>		F
		F

#### Certificates/approvals:

##### General Product Approval



**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NW1030-0HG>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3NW1030-0HG/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NW1030-0HG](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW1030-0HG)

**CAx-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

Datanorm [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

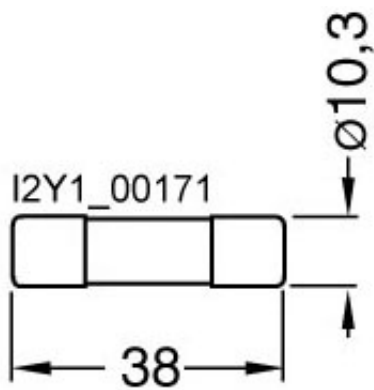

**last change:**

Apr 21, 2014