



FUSE LINK CLASS CC ACC. TO UL STANDARD 248-4  
SLOW-BLOW RATED CURRENT 10 A RATED VOLTAGE  
UP TO 600 V AC SIZE 10.3 MM X 38.1 MM

Similar to image

#### Technical data:

product brand name		SETRON
Product designation		Fuse systems
Operating current / rated value	A	10
Operating class of the fuse link		CC
Tripping characteristic class		Time-lag
Size of the fallback-system / acc. to DIN EN 60269-1		others
Operating voltage / rated value	V	600
Breaking capacity maximum short-circuit current (I <sub>cu</sub> ) / with AC / rated value	kA	200
Color coding of the fuse link		others
Item designation		
<ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> <li>• according to DIN EN 81346-2</li> </ul>		F F

#### Certificates/approvals:

##### General Product Approval



#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NW1100-0HG>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NW1100-0HG/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NW1100-0HG](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW1100-0HG)

##### CAx-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

Datanorm [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

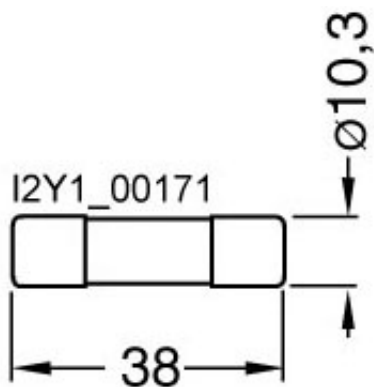

last change:

Apr 21, 2014