



General technical details:

Adjustable response current		
• of the current-dependent overload release	A	10 ... 100
Service power / for three-phase servomotors		
• rated value	kW	45 ... 5.5
type of protection		PTB 05 ATEX 3022 Ex II (2) GD

Mechanical design:

Type of mounting		stand-alone installation
Design of the electrical connection / for main current circuit		straight-through transformers

Ambient conditions:

Protection class IP		IP20
----------------------------	--	------

Certificates/approvals:

General Product Approval	Test Certificates	Shipping Approval	other
	Manufacturer	ABS	Manufacturer

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RB2906-2JG1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB2906-2JG1

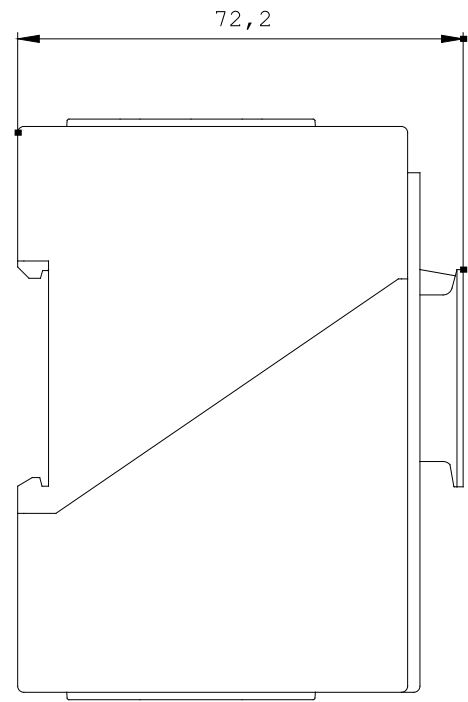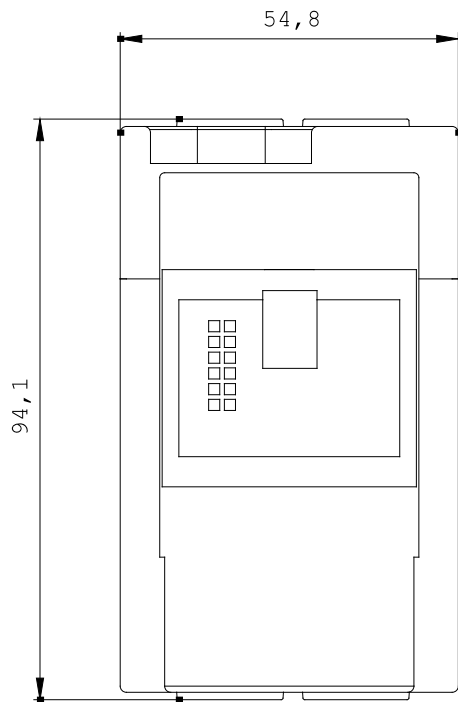

last change:

Dec 6, 2010