



COUPLING CONTACTOR RELAY, 2NO+2NC,
DC 24V, 0.7...1.25*US,
W/ INTEGRATED SUPPRESSOR DIODE,
SIZE S00, SCREW TERMINAL

General technical data:

product brand name		SIRIUS
product designation		Coupling relay for switching auxiliary circuits
Size of the contactor		S00
Protection class IP / on the front		IP20
Degree of pollution		3
Insulation voltage / with degree of pollution 3 / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during transport	°C	-55 ... 80
• during storage	°C	-55 ... 80
• during operating phase	°C	-25 ... 60
Resistance against shock		10g / 5 ms and 5g / 10 ms
Impulse voltage resistance / rated value	kV	6
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K
• according to DIN EN 61346-2		K
Mechanical operating cycles as operating time		
• of the contactor / typical		30,000,000

Control circuit:

Design of the surge suppressor		with suppressor diode
Type of voltage / of the controlled supply voltage		DC
Control supply voltage / 1 • for DC / rated value	V	24
Working range factor supply voltage rated value / of the magnet coil • for DC		0.7 ... 1.25
Holding power / of the solenoid / for DC	W	2.8
Pull-in power / of the solenoid / for DC	W	2.8
Resistive loss / of the magnet coil / for DC / typical	W	2.8

Auxiliary circuit:

Product extension / auxiliary switch		No
Identification number and letter for switching elements		22 E
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts • instantaneous switching • delayed switching • asynchronous switching • lagging switching		2 2 0 0 0
Number of NO contacts / for auxiliary contacts • instantaneous switching • delayed switching • asynchronous switching • leading switching		2 2 0 0 0
Number of changeover contacts • for auxiliary contacts		0
Operating current / of the auxiliary contacts • at AC-12 / maximum • at AC-15 • at 230 V • at 400 V • at 500 V • at 690 V • with 1 current path • at DC-12 • at 24 V • at 110 V • at 220 V	A A A A A A A A	10 10 3 2 1 6 3 1

- at DC-13
- at 24 V
- at 110 V
- at 220 V

A	6
A	1
A	0.3

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch

- required

Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current $I_k < 400$ A)

Installation/mounting/dimensions:

Built in orientation

vertical

Type of mounting

screw and snap-on mounting onto 35 mm standard mounting rail

Width

mm 45

Height

mm 57.5

Depth

mm 73

Distance, to be maintained, to the ranks assembly

- forwards
- backwards
- upwards
- downwards
- sideways

mm 0
mm 0
mm 0
mm 0
mm 0

Distance, to be maintained, to earthed part

- forwards
- backwards
- upwards
- downwards
- sideways

mm 0
mm 0
mm 0
mm 0
mm 6

Distance, to be maintained, conductive elements

- forwards
- backwards
- upwards
- downwards
- sideways

mm 0
mm 0
mm 0
mm 0
mm 6

Connections:

Design of the electrical connection

- for auxiliary and control current circuit

screw-type terminals

Type of the connectable conductor cross-section

- for auxiliary contacts

- solid
- finely stranded
 - with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), 2x 4 mm²

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 2x 12

Certificates/approvals:

Verification of suitability

CE / UL / CSA / CCC

General Product Approval

Test Certificates

[CQC](#)



[ROSTEST](#)

[Manufacturer](#)

Shipping Approval

[ABS](#)

[PRS](#)

UL/CSA ratings

Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

Safety:

B10 value / with high demand rate

- according to SN 31920

1,000,000

Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%	40
%	73

Failure rate (FIT value) / with low demand rate

- according to SN 31920

FIT	100
-----	-----

T1 value / for proof test interval or service life

- according to IEC 61508

a	10
---	----

Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH2122-1KB40/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH2122-1KB40

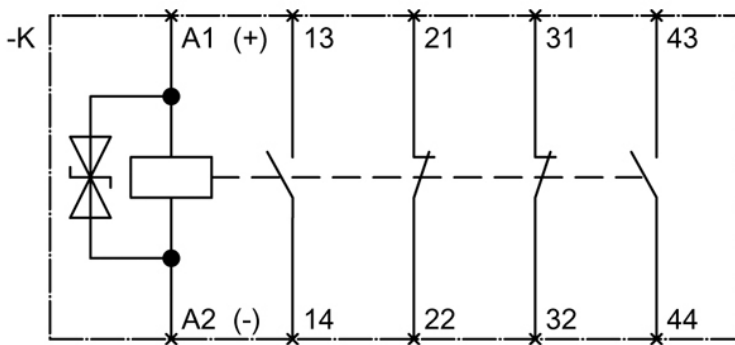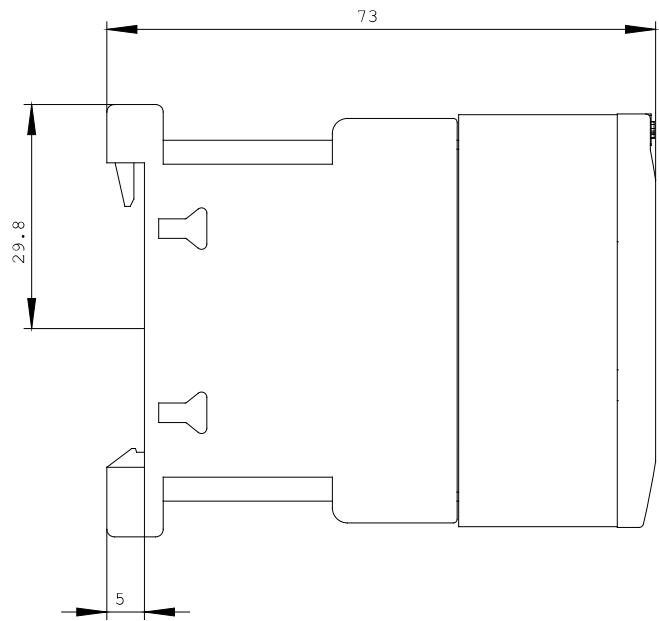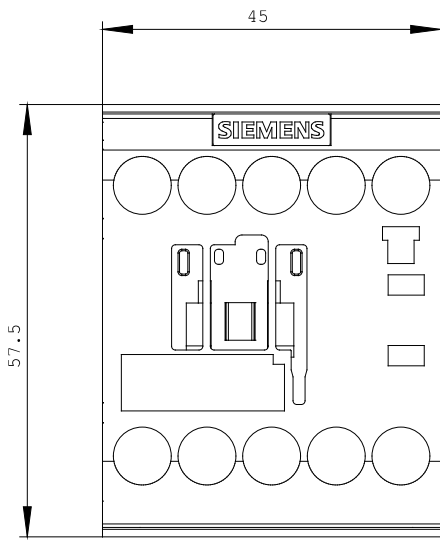

last change:

Jun 20, 2011