

Thermistor motor protection relay Standard evaluation unit 22.5 mm enclosure screw terminal 2 change-over contacts US = 24 V AC/DC Auto-reset suitable for bimetallic switch 2 LEDs (READY/TRIPPED) galvanic isolation



Figure similar

| | |
|--------------------------|--|
| Product brand name | SIRIUS |
| Product category | SIRIUS 3RN2 thermistor motor protection |
| Product designation | Thermistor motor protection relay |
| Design of the product | Standard evaluation unit, suitable for bimetallic switch |
| Product type designation | 3RN2 |

| General technical data | |
|---|---------------------------|
| Display version LED | Yes |
| Power loss [W] for rated value of the current | |
| <ul style="list-style-type: none"> at AC in hot operating state at DC in hot operating state | <p>1.1 W</p> <p>0.6 W</p> |
| Insulation voltage | |
| <ul style="list-style-type: none"> for overvoltage category III according to IEC 60664 — with degree of pollution 3 rated value | 300 V |
| Degree of pollution | 3 |
| Surge voltage resistance rated value | 4 kV |
| Protection class IP | IP20 |

| | |
|---|-----------------------|
| Shock resistance | |
| • acc. to IEC 60068-2-27 | 11g / 15 ms |
| Vibration resistance | |
| • acc. to IEC 60068-2-6 | 10 ... 55 Hz: 0.35 mm |
| Mechanical service life (switching cycles) | |
| • typical | 10 000 000 |
| Electrical endurance (switching cycles) | |
| • at AC-15 at 230 V typical | 100 000 |
| Thermal current of the switching element with contacts maximum | 5 A |
| Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | K |
| Reference code acc. to DIN EN 81346-2 | K |
| Reference code acc. to DIN EN 61346-2 | K |

Control circuit/ Control

| | |
|---|-------------|
| Type of voltage of the control supply voltage | AC/DC |
| Control supply voltage at AC | |
| • at 50 Hz rated value | 24 ... 24 V |
| • at 60 Hz rated value | 24 ... 24 V |
| Control supply voltage at DC | |
| • rated value | 24 ... 24 V |
| Operating range factor control supply voltage rated value at DC | |
| • initial value | 0.85 |
| • Full-scale value | 1.1 |
| Operating range factor control supply voltage rated value at AC at 50 Hz | |
| • initial value | 0.85 |
| • Full-scale value | 1.1 |
| Operating range factor control supply voltage rated value at AC at 60 Hz | |
| • initial value | 0.85 |
| • Full-scale value | 1.1 |
| Inrush current peak | |
| • at 24 V | 1.8 A |
| Duration of inrush current peak | |
| • at 24 V | 2 ms |

Measuring circuit

| | |
|---|-------|
| Buffering time in the event of power failure minimum | 40 ms |
|---|-------|

Precision

| | |
|------------------------------------|-----|
| Relative metering precision | 9 % |
|------------------------------------|-----|

Auxiliary circuit

| | |
|---|--------------------|
| Material of switching contacts | AgSnO ₂ |
| Number of NC contacts for auxiliary contacts | 0 |
| Number of NO contacts for auxiliary contacts | 0 |
| Number of CO contacts | |
| • for auxiliary contacts | 2 |
| Operating current of auxiliary contacts at DC-13 | |
| • at 24 V | 1 A |
| • at 125 V | 0.2 A |
| • at 250 V | 0.1 A |

Main circuit

| | |
|--|--------------|
| Operating frequency rated value | 50 ... 60 Hz |
|--|--------------|

Outputs

| | |
|---|-------|
| Ampacity of the output relay at AC-15 | |
| • at 250 V at 50/60 Hz | 3 A |
| Ampacity of the output relay at DC-13 | |
| • at 24 V | 1 A |
| • at 125 V | 0.2 A |
| Continuous current of the DIAZED fuse link of the output relay | 6 A |

Electromagnetic compatibility

| | |
|--|---|
| Conducted interference | |
| • due to burst acc. to IEC 61000-4-4 | 2 kV (power ports) / 1 kV (signal ports) |
| • due to conductor-earth surge acc. to IEC 61000-4-5 | 2 kV (line to ground) |
| • due to conductor-conductor surge acc. to IEC 61000-4-5 | 1 kV (line to line) |
| Electrostatic discharge acc. to IEC 61000-4-2 | 6 kV contact discharge / 8 kV air discharge |

Galvanic isolation

| | |
|---|--------------------|
| Design of the electrical isolation | galvanic isolation |
| Galvanic isolation | |
| • between entrance and outlet | Yes |
| • between the outputs | Yes |
| • between the voltage supply and other circuits | No |

Connections/Terminals

| | |
|--|--|
| Product function | |
| • removable terminal for auxiliary and control circuit | Yes |
| Type of electrical connection | screw-type terminals |
| Type of connectable conductor cross-sections | |
| • solid | 1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) |
| • finely stranded with core end processing | 1x (0.5 ... 4 mm ²), 2x (0.5 ... 1.5 mm ²) |

| | |
|--|--|
| <ul style="list-style-type: none"> • at AWG conductors solid | 1x (20 ... 12), 2x (20 ... 14) |
| Connectable conductor cross-section <ul style="list-style-type: none"> • solid • finely stranded with core end processing | 0.5 ... 4 mm ² 0.5 ... 4 mm ² |
| AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> • solid • stranded | 20 ... 12 20 ... 12 |
| Tightening torque <ul style="list-style-type: none"> • with screw-type terminals | 0.6 ... 0.8 N·m |

Installation/ mounting/ dimensions

| | |
|--|--|
| Mounting position | any |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail |
| Height | 100 mm |
| Width | 22.5 mm |
| Depth | 90 mm |
| Required spacing <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — Backwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side | 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm |

Ambient conditions

| | |
|---|----------------------------------|
| Installation altitude at height above sea level <ul style="list-style-type: none"> • maximum | 2 000 m |
| Ambient temperature <ul style="list-style-type: none"> • during operation • during storage | -25 ... +60 °C -40 ... +85 °C |

- during transport

-40 ... +85 °C

Relative humidity

- during operation

70 %

Certificates/approvals

General Product Approval

EMC

Declaration of
Conformity



Test Certificates

Marine / Shipping

other

[Type Test Certificates/Test Report](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RN2010-1BA30>

Cax online generator





<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RN2010-1BA30>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RN2010-1BA30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RN2010-1BA30&lang=en

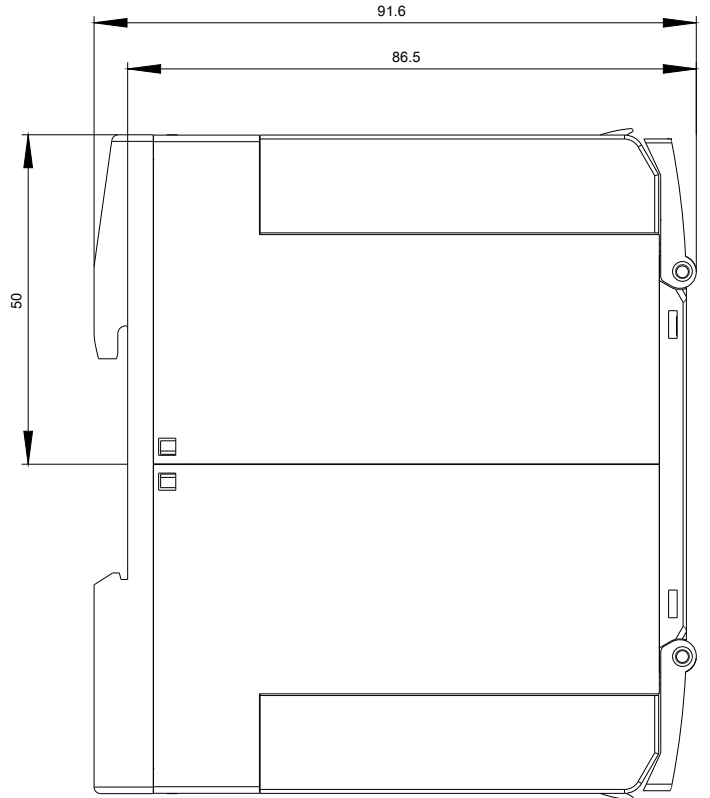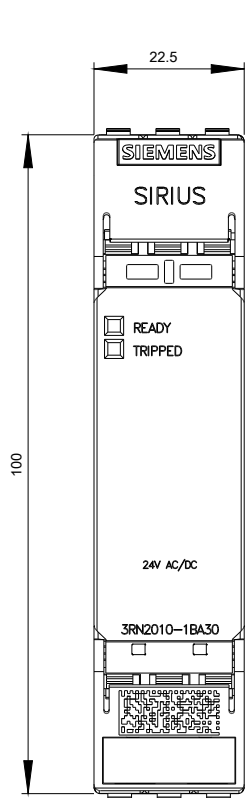

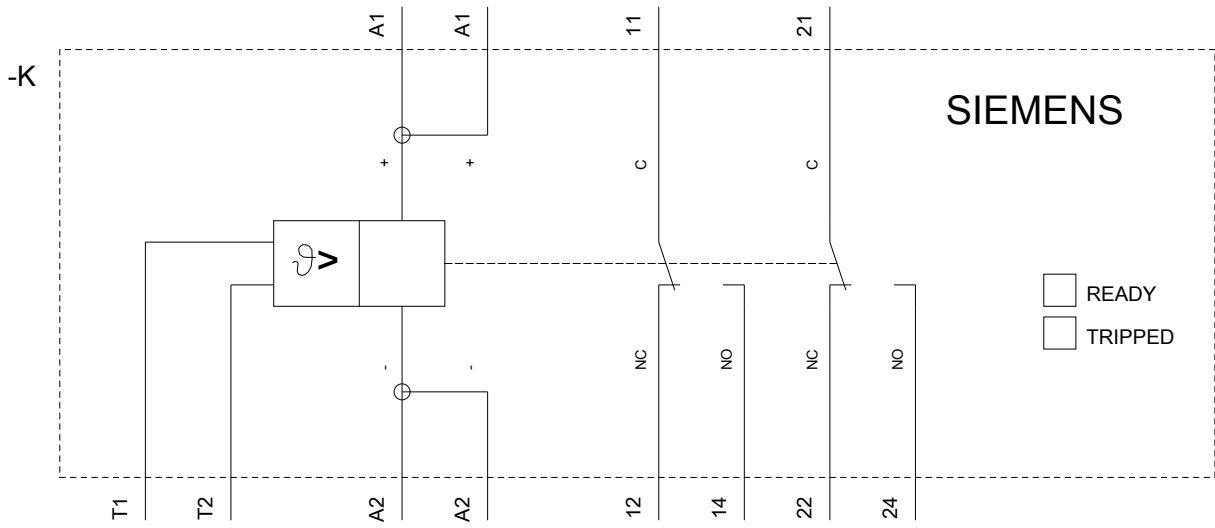

last modified:

10/16/2018