

Power contactor, AC-3 65 A, 30 kW / 400 V 2 NO + 2 NC, 230 V AC 50/60 Hz, with plugged-in varistor, 3-pole, size S2 screw terminals Perm. mounted auxiliary switch



Figure similar

|   |                 |
|---|-----------------|
| Product brand name                                  | SIRIUS          |
| Product designation                                 | Power contactor |
| Product type designation                            | 3RT2            |
| <b>General technical data</b>                       |                 |
| Size of contactor                                   | S2              |
| Product extension                                   |                 |
| • function module for communication                 | No              |
| • Auxiliary switch                                  | No              |
| Surge voltage resistance                            |                 |
| • of main circuit rated value                       | 6 kV            |
| • of auxiliary circuit rated value                  | 6 kV            |
| maximum permissible voltage for safe isolation      |                 |
| • between coil and main contacts acc. to EN 60947-1 | 400 V           |
| Protection class IP                                 |                 |
| • on the front                                      | IP20            |
| • of the terminal                                   | IP00            |

|   |                             |
|---|-----------------------------|
| <b>Shock resistance at rectangular impulse</b>  |                             |
| • at AC   | 9.8g / 5 ms, 6.5g / 10 ms   |
| <b>Shock resistance with sine pulse</b>   |                             |
| • at AC   | 15.3g / 5 ms, 10.1g / 10 ms |
| <b>Mechanical service life (switching cycles)</b>                                       |                             |
| • of contactor typical  | 10 000 000                  |
| • of the contactor with added electronics-compatible auxiliary switch block typical     | 5 000 000                   |
| • of the contactor with added auxiliary switch block typical                            | 10 000 000                  |
| <b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b> | K                           |
| <b>Reference code acc. to DIN EN 81346-2</b>  | Q                           |

|  |                |
|--|----------------|
| <b>Ambient conditions</b>                              |                |
| <b>Installation altitude at height above sea level</b> |                |
| • maximum  | 2 000 m        |
| <b>Ambient temperature</b>                             |                |
| • during operation                                     | -25 ... +60 °C |
| • during storage                                       | -55 ... +80 °C |

|  |                    |
|--|--------------------|
| <b>Main circuit</b>  |                    |
| <b>Number of poles for main current circuit</b>                    | 3                  |
| <b>Number of NO contacts for main contacts</b>                     | 3                  |
| <b>Operating voltage</b>   |                    |
| • at AC-3 rated value maximum                                      | 690 V              |
| <b>Operating current</b>   |                    |
| • at AC-1 at 400 V   |                    |
| — at ambient temperature 40 °C rated value                         | 80 A               |
| • at AC-1  |                    |
| — up to 690 V at ambient temperature 40 °C rated value             | 80 A               |
| — up to 690 V at ambient temperature 60 °C rated value             | 70 A               |
| • at AC-2 at 400 V rated value                                     | 65 A               |
| • at AC-3  |                    |
| — at 400 V rated value   | 65 A               |
| — at 500 V rated value   | 65 A               |
| — at 690 V rated value   | 47 A               |
| • at AC-4 at 400 V rated value                                     | 55 A               |
| <b>Connectable conductor cross-section in main circuit at AC-1</b> |                    |
| • at 60 °C minimum permissible                                     | 25 mm <sup>2</sup> |
| • at 40 °C minimum permissible                                     | 25 mm <sup>2</sup> |

|  |        |
|--|--------|
| <b>Operating current for approx. 200000 operating cycles at AC-4</b> |        |
| • at 400 V rated value   | 28 A   |
| • at 690 V rated value   | 22 A   |
| <b>Operating current</b>   |        |
| • at 1 current path at DC-1  |        |
| — at 24 V rated value  | 55 A   |
| — at 110 V rated value   | 4.5 A  |
| — at 220 V rated value   | 1 A    |
| — at 440 V rated value   | 0.4 A  |
| — at 600 V rated value   | 0.25 A |
| • with 2 current paths in series at DC-1                             |        |
| — at 24 V rated value  | 55 A   |
| — at 110 V rated value   | 45 A   |
| — at 220 V rated value   | 5 A    |
| — at 440 V rated value   | 1 A    |
| — at 600 V rated value   | 0.8 A  |
| • with 3 current paths in series at DC-1                             |        |
| — at 24 V rated value  | 55 A   |
| — at 110 V rated value   | 55 A   |
| — at 220 V rated value   | 45 A   |
| — at 440 V rated value   | 2.9 A  |
| — at 600 V rated value   | 1.4 A  |
| <b>Operating current</b>   |        |
| • at 1 current path at DC-3 at DC-5                                  |        |
| — at 24 V rated value  | 35 A   |
| — at 110 V rated value   | 2.5 A  |
| — at 220 V rated value   | 1 A    |
| — at 440 V rated value   | 0.1 A  |
| — at 600 V rated value   | 0.06 A |
| • with 2 current paths in series at DC-3 at DC-5                     |        |
| — at 24 V rated value  | 55 A   |
| — at 110 V rated value   | 25 A   |
| — at 220 V rated value   | 5 A    |
| — at 440 V rated value   | 0.27 A |
| — at 600 V rated value   | 0.16 A |
| • with 3 current paths in series at DC-3 at DC-5                     |        |
| — at 24 V rated value  | 55 A   |
| — at 110 V rated value   | 55 A   |
| — at 220 V rated value   | 25 A   |
| — at 440 V rated value   | 0.6 A  |

|   |               |
|---|---------------|
| — at 600 V rated value  | 0.35 A        |
| <b>Operating power</b>  |               |
| • at AC-1   |               |
| — at 230 V rated value  | 30 kW         |
| — at 230 V at 60 °C rated value   | 26 kW         |
| — at 400 V rated value  | 53 kW         |
| — at 400 V at 60 °C rated value   | 46 kW         |
| — at 690 V rated value  | 91 kW         |
| — at 690 V at 60 °C rated value   | 79 kW         |
| • at AC-2 at 400 V rated value  | 30 kW         |
| • at AC-3   |               |
| — at 230 V rated value  | 18.5 kW       |
| — at 400 V rated value  | 30 kW         |
| — at 500 V rated value  | 37 kW         |
| — at 690 V rated value  | 37 kW         |
| <b>Operating power for approx. 200000 operating cycles at AC-4</b>                            |               |
| • at 400 V rated value  | 14.7 kW       |
| • at 690 V rated value  | 20 kW         |
| <b>Thermal short-time current limited to 10 s</b>   | 520 A         |
| <b>Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor</b> | 3.8 W         |
| <b>No-load switching frequency</b>  |               |
| • at AC   | 5 000 1/h     |
| <b>Operating frequency</b>  |               |
| • at AC-1 maximum   | 800 1/h       |
| • at AC-2 maximum   | 400 1/h       |
| • at AC-3 maximum   | 700 1/h       |
| • at AC-4 maximum   | 200 1/h       |
| <b>Control circuit/ Control</b>   |               |
| <b>Type of voltage of the control supply voltage</b>  | AC            |
| <b>Control supply voltage at AC</b>   |               |
| • at 50 Hz rated value  | 230 V         |
| • at 60 Hz rated value  | 230 V         |
| <b>Operating range factor control supply voltage rated value of magnet coil at AC</b>         |               |
| • at 50 Hz  | 0.8 ... 1.1   |
| • at 60 Hz  | 0.85 ... 1.1  |
| <b>Design of the surge suppressor</b>   | with varistor |
| <b>Apparent pick-up power of magnet coil at AC</b>  |               |
| • at 50 Hz  | 210 V·A       |
| • at 60 Hz  | 188 V·A       |

|  |                  |
|--|------------------|
| <b>Inductive power factor with closing power of the coil</b>     |                  |
| • at 50 Hz   | 0.69             |
| • at 60 Hz   | 0.65             |
| <b>Apparent holding power of magnet coil at AC</b>               |                  |
| • at 50 Hz   | 17.2 V·A         |
| • at 60 Hz   | 16.5 V·A         |
| <b>Inductive power factor with the holding power of the coil</b> |                  |
| • at 50 Hz   | 0.36             |
| • at 60 Hz   | 0.39             |
| <b>Closing delay</b>   |                  |
| • at AC  | 10 ... 80 ms     |
| <b>Opening delay</b>   |                  |
| • at AC  | 10 ... 18 ms     |
| <b>Arcing time</b>   | 10 ... 20 ms     |
| <b>Control version of the switch operating mechanism</b>         | Standard A1 - A2 |

### Auxiliary circuit

|   |        |
|---|--------|
| <b>Number of NC contacts for auxiliary contacts</b> |        |
| • instantaneous contact                             | 2      |
| <b>Number of NO contacts for auxiliary contacts</b> |        |
| • instantaneous contact                             | 2      |
| <b>Operating current at AC-12 maximum</b>           | 10 A   |
| <b>Operating current at AC-15</b>                   |        |
| • at 230 V rated value                              | 6 A    |
| • at 400 V rated value                              | 3 A    |
| • at 500 V rated value                              | 2 A    |
| • at 690 V rated value                              | 1 A    |
| <b>Operating current at DC-12</b>                   |        |
| • at 24 V rated value                               | 10 A   |
| • at 48 V rated value                               | 6 A    |
| • at 60 V rated value                               | 6 A    |
| • at 110 V rated value                              | 3 A    |
| • at 125 V rated value                              | 2 A    |
| • at 220 V rated value                              | 1 A    |
| • at 600 V rated value                              | 0.15 A |
| <b>Operating current at DC-13</b>                   |        |
| • at 24 V rated value                               | 6 A    |
| • at 48 V rated value                               | 2 A    |
| • at 60 V rated value                               | 2 A    |
| • at 110 V rated value                              | 1 A    |
| • at 125 V rated value                              | 0.9 A  |
| • at 220 V rated value                              | 0.3 A  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>  | 0.1 A  |
| <b>Contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)                              |
| <b>UL/CSA ratings</b>   |  |
| <b>Full-load current (FLA) for three-phase AC motor</b>   |  |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> </ul>  | 65 A   |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>  | 52 A   |
| <b>Yielded mechanical performance [hp]</b>  |  |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | <p>5 hp</p> <p>10 hp</p> <p>20 hp</p> <p>20 hp</p> <p>50 hp</p> <p>50 hp</p> |
| <b>Contact rating of auxiliary contacts according to UL</b>   | A600 / Q600  |

|   |   |
|---|---|
| <b>Short-circuit protection</b>   |   |
| <b>Design of the fuse link</b>  |   |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | <p>gG: 250A (690V,100kA), aM: 160A (690V,100kA), BS88: 200A (415V,80kA)</p> <p>gG: 125A (690V,100kA), aM: 63A (690V,100kA), BS88: 100A (415V,80kA)</p> <p>fuse gG: 10 A</p> |

|   |  |
|---|--|
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>Mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b>  | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715   |
| <ul style="list-style-type: none"> <li>• Side-by-side mounting</li> </ul>   | Yes  |
| <b>Height</b>   | 114 mm   |
| <b>Width</b>  | 55 mm  |
| <b>Depth</b>  | 174 mm   |
| <b>Required spacing</b>   |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts</li> </ul> | <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>0 mm</p>   |

|                  |       |
|------------------|-------|
| — forwards       | 10 mm |
| — upwards        | 10 mm |
| — at the side    | 6 mm  |
| — downwards      | 10 mm |
| • for live parts |       |
| — forwards       | 10 mm |
| — upwards        | 10 mm |
| — downwards      | 10 mm |
| — at the side    | 6 mm  |

## Connections/Terminals

|   |   |
|---|---|
| <b>Type of electrical connection</b>                              |   |
| • for main current circuit  | screw-type terminals  |
| • for auxiliary and control current circuit                       | screw-type terminals  |
| <b>Type of connectable conductor cross-sections</b>               |   |
| • for main contacts   |   |
| — single or multi-stranded  | 2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> )        |
| — finely stranded with core end processing                        | 2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> )        |
| • at AWG conductors for main contacts                             | 2x (18 ... 2), 1x (18 ... 1)  |
| <b>Connectable conductor cross-section for main contacts</b>      |   |
| • finely stranded with core end processing                        | 1 ... 35 mm <sup>2</sup>  |
| <b>Connectable conductor cross-section for auxiliary contacts</b> |   |
| • single or multi-stranded  | 0.5 ... 2.5 mm <sup>2</sup>   |
| • finely stranded with core end processing                        | 0.5 ... 2.5 mm <sup>2</sup>   |
| <b>Type of connectable conductor cross-sections</b>               |   |
| • for auxiliary contacts  |   |
| — single or multi-stranded  | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> ) |
| — finely stranded with core end processing                        | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) |
| • at AWG conductors for auxiliary contacts                        | 2x (20 ... 16), 2x (18 ... 14)  |
| <b>AWG number as coded connectable conductor cross section</b>    |   |
| • for main contacts   | 18 ... 1  |
| • for auxiliary contacts  | 20 ... 14   |

## Safety related data

|  |           |
|--|-----------|
| <b>B10 value</b>                         |           |
| • with high demand rate acc. to SN 31920 | 1 000 000 |
| <b>Proportion of dangerous failures</b>  |           |
| • with low demand rate acc. to SN 31920  | 40 %      |
| • with high demand rate acc. to SN 31920 | 73 %      |
| <b>Failure rate [FIT]</b>                |           |

|   |  |
|---|--|
| • with low demand rate acc. to SN 31920                                   | 100 FIT  |
| <b>Product function</b>   |  |
| • Mirror contact acc. to IEC 60947-4-1                                    | Yes  |
| • positively driven operation acc. to IEC 60947-5-1                       | No   |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | 20 y   |
| <b>Protection against electrical shock</b>                                | finger-safe when touched vertically from front acc. to IEC 60529 |

### Certificates/approvals

|                                 |  |                                  |
|---------------------------------|--|----------------------------------|
| <b>General Product Approval</b> | <b>Functional Safety/Safety of Machinery</b> | <b>Declaration of Conformity</b> |
|---------------------------------|--|----------------------------------|



[Type Examination Certificate](#)



|                          |                          |
|--------------------------|--------------------------|
| <b>Test Certificates</b> | <b>Marine / Shipping</b> |
|--------------------------|--------------------------|

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



|                          |              |
|--------------------------|--------------|
| <b>Marine / Shipping</b> | <b>other</b> |
|--------------------------|--------------|



[Confirmation](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2037-1CL24-3MA0>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2037-1CL24-3MA0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2037-1CL24-3MA0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2037-1CL24-3MA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2037-1CL24-3MA0&lang=en)




**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**


<https://support.industry.siemens.com/cs/ww/en/ps/3RT2037-1CL24-3MA0/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2037-1CL24-3MA0&objecttype=14&gridview=view1>



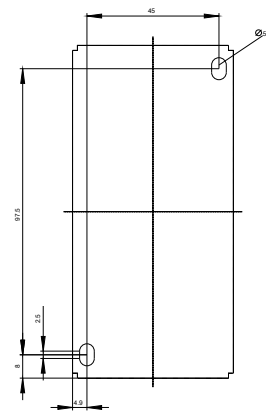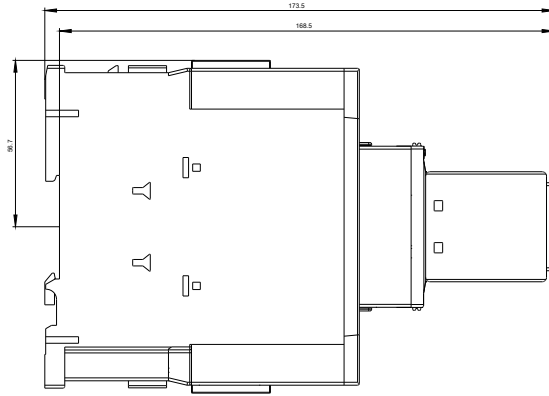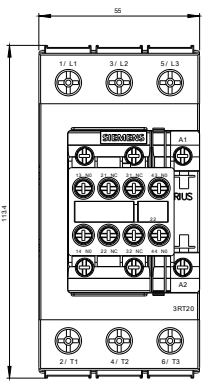

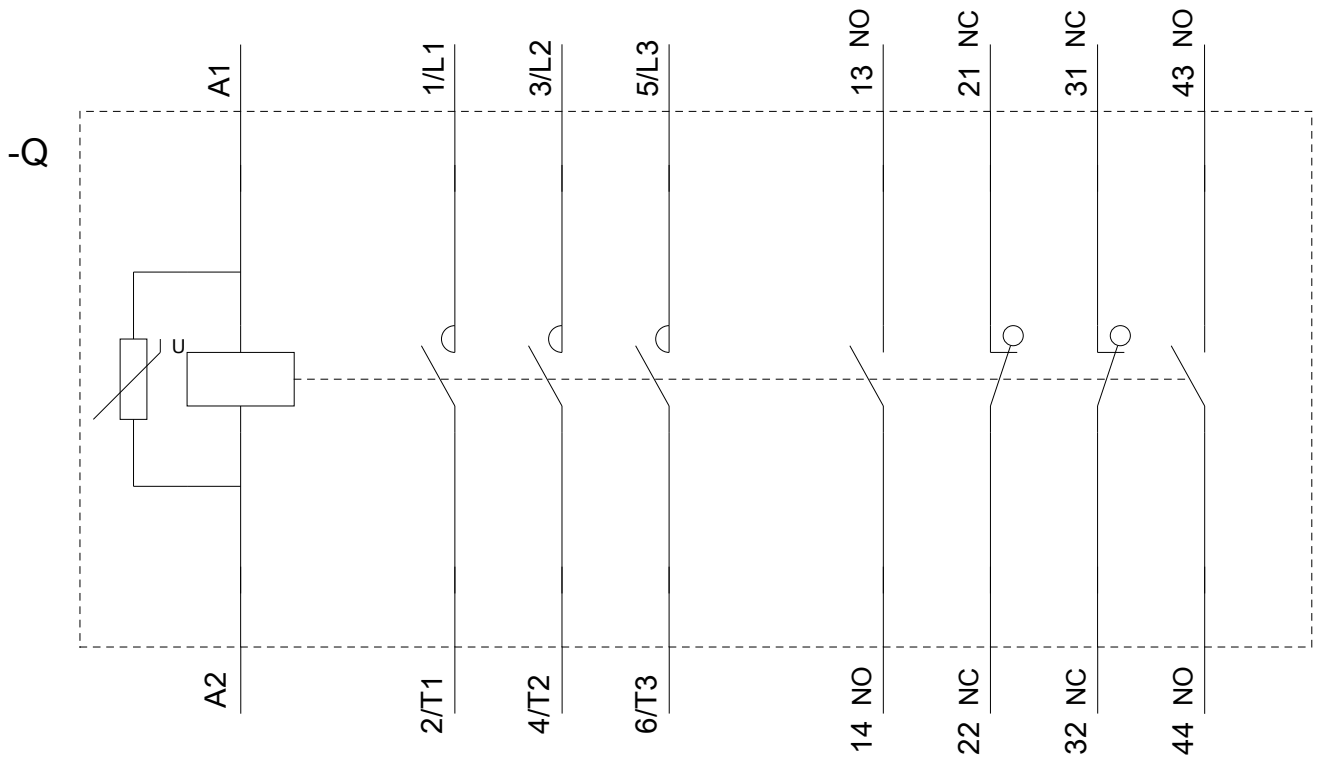

last modified:

07/16/2018