



SIRIUS SOFT STARTER, SIZE S0, 12,5A,
5.5 KW / 400 V, AC 200...460 V, UC 24 V

General details:

Product brand name		SIRIUS
Product equipment		
<ul style="list-style-type: none"> integrated bridging contact system 		Yes
<ul style="list-style-type: none"> thyristors 		Yes
Product function		
<ul style="list-style-type: none"> intrinsic device protection 		No
<ul style="list-style-type: none"> motor overload protection 		No
<ul style="list-style-type: none"> evaluation of thermal resistor motor protection 		No
<ul style="list-style-type: none"> Reset external 		No
<ul style="list-style-type: none"> adjustable current limitation 		No
<ul style="list-style-type: none"> inside-delta circuit 		No
Product component / Outlet for enine brake		No
Item designation		
<ul style="list-style-type: none"> according to DIN EN 61346-2 		Q
<ul style="list-style-type: none"> according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		G

Power Electronics:

Product designation		soft starters for standard applications
Operating current		

<ul style="list-style-type: none"> • at 40 °C / rated value • at 50 °C / rated value • at 60 °C / rated value 	A	12.5
	A	11
	A	9
Emitted mechanical power / for three-phase servomotors		
<ul style="list-style-type: none"> • at 230 V / at standard switching / at 40 °C <ul style="list-style-type: none"> • rated value 	kW	3
<ul style="list-style-type: none"> • at 400 V / at standard switching / at 40 °C <ul style="list-style-type: none"> • rated value 	kW	5.5
Yielded mechanical performance (hp) / for three-phase servomotors		
<ul style="list-style-type: none"> • at 200 V / at standard switching <ul style="list-style-type: none"> • at 50 °C / rated value 	hp	3
<ul style="list-style-type: none"> • at 230 V / at standard switching <ul style="list-style-type: none"> • at 50 °C / rated value 	hp	3
<ul style="list-style-type: none"> • at 460 V / at standard switching <ul style="list-style-type: none"> • at 50 °C / rated value 	hp	7.5
Operating frequency		
<ul style="list-style-type: none"> • rated value 	Hz	50 ... 60
Operating voltage / with standard circuit / rated value	V	200 ... 460

Control electronics:

Type of voltage / of the controlled supply voltage		AC/DC
control supply voltage frequency / 1 / rated value	Hz	50
control supply voltage frequency / 2 / rated value	Hz	60
Relative negative tolerance / of the control supply voltage frequency	%	-10
Relative positive tolerance / of the control supply voltage frequency	%	10
Control supply voltage / 1		
<ul style="list-style-type: none"> • at 50 Hz / for AC 	V	24
<ul style="list-style-type: none"> • at 60 Hz / for AC 	V	24
Relative negative tolerance / of the control supply voltage / at 60 Hz / for AC	%	-15
Relative positive tolerance / of the control supply voltage / at 60 Hz / for AC	%	10
Control supply voltage / 1 / for DC / rated value	V	24
Relative negative tolerance / of the control supply voltage / for DC	%	-15
Relative positive tolerance / of the control supply voltage / for DC	%	10
Design of display / for fault signal		red

Mechanical design:

Size of the engine control device		S0
Width	mm	45
Height	mm	125
Depth	mm	150
Type of fixing/fixation		screw and snap-on mounting
built in orientation		With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front and back
distance, to be maintained, to the ranks assembly		
• upwards	mm	60
• sideways	mm	15
• downwards	mm	40
Cable length / maximum	m	100
Number of poles / for main current circuit		3

Electrical connections:

design of the electrical connection		
• for main current circuit		screw-type terminals
• for auxiliary and control current circuit		screw-type terminals
Number of NC contacts / for auxiliary contact		0
Number of NO contacts / for auxiliary contact		2
Number of change-over switches / for auxiliary contact		0
Type of the connectable conductor cross section / for main contacts / for box terminal / when using the front clamping point		
• solid		2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²)
• finel y stranded / with wire end processing		2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²)
Type of the connectable conductor cross section / for AWG conductors / for main contacts / for box terminal		
• when using the front c lamping point		1x 8, 2x (16 ... 10)
Type of connectable conductor cross section		
• for auxiliary contacts		
• solid		2x (0.5 ... 2.5 mm ²)
• finely stranded / with wire end processing		2x (0.5 ... 1.5 mm ²)
• for AWG conductors / for auxiliary contacts		2x (20 ... 14)
• finely stranded / with wire end processi ng		2x (20 ... 16)

Ambient conditions:

Ambient temperature		
• during the operating phase	°C	-25 ... 60
• during storage	°C	-40 ... 80

Derating temperature	°C	40
Protection class IP		IP20

Safety:

Proportion of dangerous failures		
• with high demand rate / according to SN 31920	%	50
• with low demand rate / according to SN 31920	%	20
Mean time to failure (MTTF) / with high demand rate		
• according to SN 31920	a	151
T1 value / for proof test interval or service life		
• according to IEC 61508	a	20

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Global Industry Mall (Online ordering system)




<http://www.siemens.com/industrial-controls/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RW3024-1AB04/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RW3024-1AB04

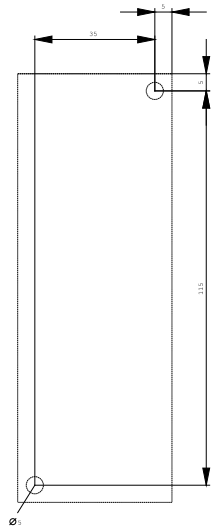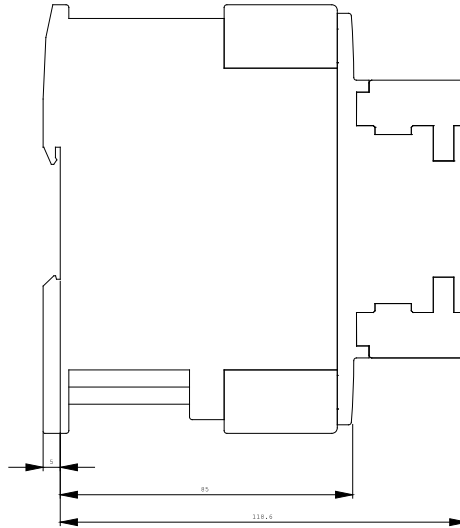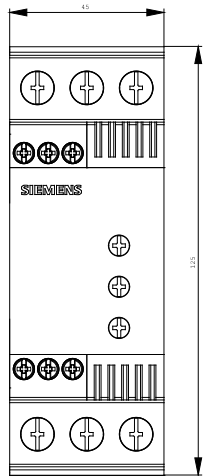

last change:

Jul 9, 2010