



SIRIUS SOFT STARTER, SIZE S2, 38 A,  
18.5 KW / 400 V, AC 200...460 V,  
UC 24 V, SCREW CONNECTION

**General details:**

<b>Product brand name</b>		SIRIUS
<b>Product equipment</b>		
<ul style="list-style-type: none"> <li>integrated bridging contact system</li> </ul>		Yes
<ul style="list-style-type: none"> <li>thyristors</li> </ul>		Yes
<b>Product function</b>		
<ul style="list-style-type: none"> <li>intrinsic device protection</li> </ul>		No
<ul style="list-style-type: none"> <li>motor overload protection</li> </ul>		No
<ul style="list-style-type: none"> <li>evaluation of thermal resistor motor protection</li> </ul>		No
<ul style="list-style-type: none"> <li>Reset external</li> </ul>		No
<ul style="list-style-type: none"> <li>adjustable current limitation</li> </ul>		No
<ul style="list-style-type: none"> <li>inside-delta circuit</li> </ul>		No
<b>Product component / Outlet for enine brake</b>		No
<b>Item designation</b>		
<ul style="list-style-type: none"> <li>according to DIN EN 61346-2</li> </ul>		Q
<ul style="list-style-type: none"> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		G

**Power Electronics:**

<b>Product designation</b>		soft starters for standard applications
Operating current		

• at 40 °C / rated value	A	38
• at 50 °C / rated value	A	32
• at 60 °C / rated value	A	27
<b>Emitted mechanical power / for three-phase servomotors</b>		
• at 230 V / at standard switching / at 40 °C		
• rated value	kW	11
• at 400 V / at standard switching / at 40 °C		
• rated value	kW	18.5
<b>Yielded mechanical performance (hp) / for three-phase servomotors</b>		
• at 200 V / at standard switching		
• at 50 °C / rated value	hp	10
• at 230 V / at standard switching		
• at 50 °C / rated value	hp	10
• at 460 V / at standard switching		
• at 50 °C / rated value	hp	25
<b>Operating frequency</b>		
• rated value	Hz	50 ... 60
<b>Relative negative tolerance / of the operating frequency</b>	%	-10
<b>Relative positive tolerance / of the operating frequency</b>	%	10
<b>Operating voltage / with standard circuit / rated value</b>	V	200 ... 460
<b>Relative negative tolerance / of the operating voltage / with standard circuit</b>	%	-10
<b>Relative positive tolerance / of the operating voltage / with standard circuit</b>	%	10
<b>Minimum load in % of I<sub>M</sub></b>	%	9
<b>Continuous operating current in % of I<sub>e</sub> / at 40°C</b>	%	100
<b>Control electronics:</b>		
<b>Type of voltage / of the controlled supply voltage</b>		AC/DC
<b>control supply voltage frequency / 1 / rated value</b>	Hz	50
<b>control supply voltage frequency / 2 / rated value</b>	Hz	60
<b>Relative negative tolerance / of the control supply voltage frequency</b>	%	-10
<b>Relative positive tolerance / of the control supply voltage frequency</b>	%	10
<b>Control supply voltage / 1</b>		
• at 50 Hz / for AC	V	24
• at 60 Hz / for AC	V	24
<b>Relative negative tolerance / of the control supply voltage / at 60 Hz / for AC</b>	%	-10

Relative positive tolerance / of the control supply voltage / at 60 Hz / for AC	%	10
Control supply voltage / 1 / for DC / rated value	V	24
Relative negative tolerance / of the control supply voltage / for DC	%	-10
Relative positive tolerance / of the control supply voltage / for DC	%	10
Design of display / for fault signal		red

#### Mechanical design:

Size of the engine control device		S2
Width	mm	55
Height	mm	160
Depth	mm	170
Type of fixing/fixation		screw and snap-on mounting
built in orientation		With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front and back
distance, to be maintained, to the ranks assembly		
• upwards	mm	60
• sideways	mm	30
• downwards	mm	40
Altitude of installation site / at a height over sea level	m	5,000
Cable length / maximum	m	100
Number of poles / for main current circuit		3

#### Electrical connections:

design of the electrical connection		
• for main current circuit		screw-type terminals
• for auxiliary and control current circuit		screw-type terminals
Number of NC contacts / for auxiliary contact		0
Number of NO contacts / for auxiliary contact		2
Number of change-over switches / for auxiliary contact		0
Type of the connectable conductor cross section / for main contacts / for box terminal / when using the front clamping point		
• solid		2x (1.5 ... 16 mm <sup>2</sup> )
• finely stranded / with wire end processing		0.75 ... 25 mm <sup>2</sup>
• stranded		0.75 ... 35 mm <sup>2</sup>
Type of the connectable conductor cross section / for main contacts / for box terminal / when using the back clamping point		
• solid		2x (1.5 ... 16 mm <sup>2</sup> )

<ul style="list-style-type: none"> <li>finely stranded / with wire end processing</li> <li>stranded</li> </ul>	1.5 ... 25 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>stranded</li> </ul>	1.5 ... 35 mm <sup>2</sup>
<b>Type of the connectable conductor cross section / for main contacts / for box terminal / when using both clamping points</b> <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded / with wire end processing</li> <li>stranded</li> </ul>	2x (1.5 ... 16 mm <sup>2</sup> ) 2x (1.5 ... 16 mm <sup>2</sup> ) 2x (1.5 ... 25 mm <sup>2</sup> )
<b>Type of the connectable conductor cross section / for AWG conductors / for main contacts / for box terminal</b> <ul style="list-style-type: none"> <li>when using the back clamping point</li> <li>when using the front clamping point</li> <li>when using both clamping points</li> </ul>	16 ... 2 18 ... 2 2x (16 ... 2)
<b>Type of connectable conductor cross section</b> <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded / with wire end processing</li> </ul> </li> <li>for AWG conductors / for auxiliary contacts <ul style="list-style-type: none"> <li>finely stranded / with wire end processing</li> </ul> </li> </ul>	2x (0.5 ... 2.5 mm <sup>2</sup> ) 2x (0.5 ... 1.5 mm <sup>2</sup> ) 2x (20 ... 14) 2x (20 ... 16)

#### Ambient conditions:

<b>Ambient temperature</b> <ul style="list-style-type: none"> <li>during the operating phase</li> <li>during storage</li> </ul>	°C	-25 ... 60
	°C	-40 ... 80
<b>Derating temperature</b>	°C	40
<b>Protection class IP</b>		IP20

#### Safety:

<b>Proportion of dangerous failures</b> <ul style="list-style-type: none"> <li>with high demand rate / according to SN 31920</li> <li>with low demand rate / according to SN 31920</li> </ul>	%	50
	%	20
<b>Mean time to failure (MTTF) / with high demand rate</b> <ul style="list-style-type: none"> <li>according to SN 31920</li> </ul>	a	164
<b>T1 value / for proof test interval or service life</b> <ul style="list-style-type: none"> <li>according to IEC 61508</li> </ul>	a	20

#### Further information:

---

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

---

**Global Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**




<http://support.automation.siemens.com/WW/view/en/3RW3035-1AB04/all>

---

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RW3035-1AB04](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RW3035-1AB04)

---

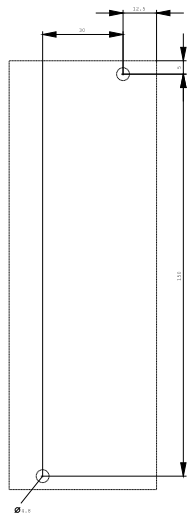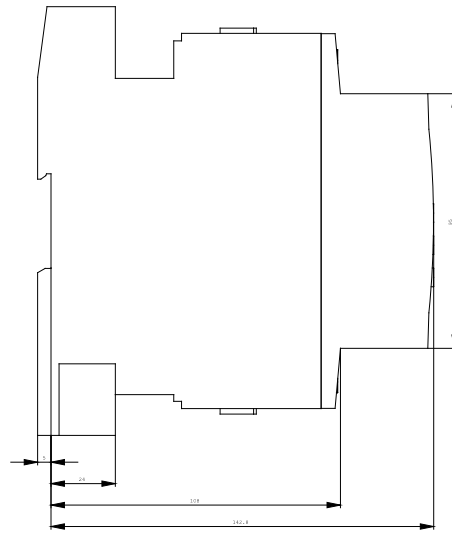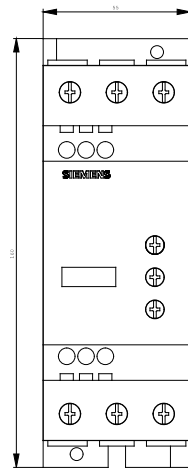

**last change:**

Jul 9, 2010