SIEMENS

Product data sheet

3SB3000-1HA20



22MM PLASTIC ROUND ACTUATOR: EMERGEN.-STOP MUSHR.PUSHB. 40MM LATCH.W. ROT.-TO-UNLATCH MECH. WITH HOLDER RED

Design of the operating mechanism Emergency stop mushroom pushbutton Type of unlocking device rotate-to-unlatch mechanism Material / of the activation element plastic Number of switching positions 2 Product component / front ring No Product function / EMERGENCY STOP function Yes Holder:					
Material / of the activation element plastic Number of switching positions 2 Product component / front ring No Product function / EMERGENCY STOP function Yes Holder:					
Number of switching positions 2 Product component / front ring No Product function / EMERGENCY STOP function Yes Holder: Yes Material / of holder Plastic General technical details: Resistance against shock <= 50g					
Product component / front ring No Product function / EMERGENCY STOP function Yes Holder: Yes Material / of holder Plastic General technical details: Plastic Resistance against shock • for devices without incandescent lamp / according to IEC 60068-2-27					
Product function / EMERGENCY STOP function Yes Holder:					
Holder: Material / of holder General technical details: Resistance against shock • for devices without incandescent lamp / according to IEC 60068- 2-27					
Material / of holder Plastic General technical details: Plastic Resistance against shock • for devices without incandescent lamp / according to IEC 60068- 2-27 <= 50g					
General technical details: Resistance against shock • for devices without incandescent lamp / according to IEC 60068- 2-27					
Resistance against shock • for devices without incandescent lamp / according to IEC 60068- 2-27 <= 50g					
for devices without incandescent lamp / according to IEC 60068- 2-27	General technical details:				
2-27					
Resistance against vibration / according to IEC 60068-2-6 20 200 Hz: 5g					
Operating cycles / maximum 1/h 1,000					
Mechanical operating cycles as operating time / typical 300,000					
Item designation					
• according to DIN EN 61346-2 S					
According to DIN 40719 extendable after IEC 204-2 / according to IEC 750 S					

Tightening torque / of the screws in the bracket / maximum	N∙m	1
Ambient temperature		
during operating	°C	-25 +70
during storage	°C	-40 +80
Protection class IP		IP66
B10 value / with high demand rate / according to SN 31920		100,000
Proportion of dangerous failures / with high demand rate / according to SN 31920	%	20
Proportion of dangerous failures / with low demand rate / according to SN 31920	%	20
Failure rate (FIT value) / with low demand rate / according to SN 31920	FIT	100
T1 value / for proof test interval or service life / according to IEC 61508	а	20
climatic class / during the operating phase / according to EN 60721		ЗК6
Type of mounting		front mounting
Shape / of the installation hole		round
Installation width	mm	40.5
Mounting diameter	mm	22
Mounting height	mm	49
Mounting depth	mm	29

Certificates/approvals:

Further information:


Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:

http://www.siemens.com/cax

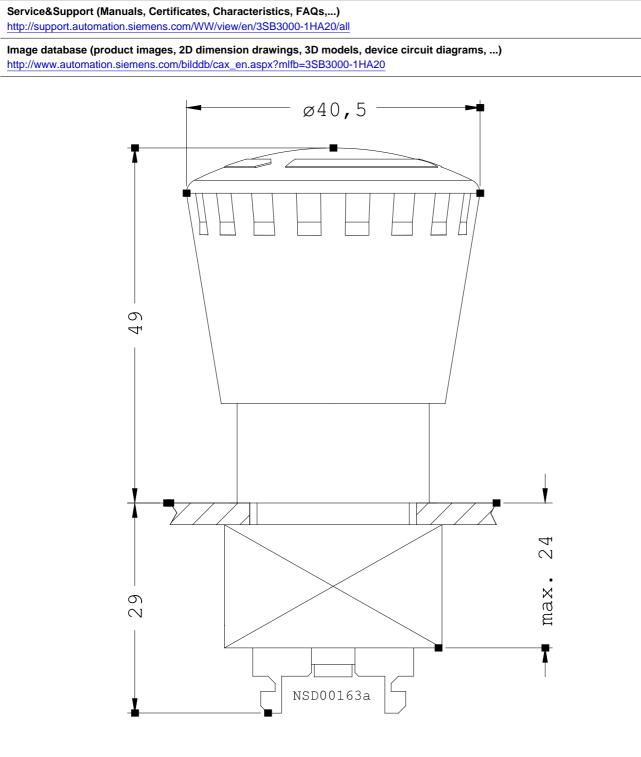

last change:

Jun 26, 2012