



Figure similar

SIRIUS SAFETY RELAY WITH RELAY RELEASE CIRCUITS (RC), DC 24V, 45.0MM, SCREW TERMINAL, RC INSTANT.: 2NO, RC DELAYED: 2NO 0.5...30S, MC: 1NC, AUTOSTART, BASIC DEVICE, MAX. ACHIEVABLE SIL: 3/2, PL: E/D

General technical data:	
product brand name	SIRIUS
Product designation	safety relays
Design of the product	for EMERGENCY-STOP units
Protection class IP of the enclosure	IP20
Protection class IP of the terminal	IP20
Protection against electrical shock	finger-safe
Insulation voltage Rated value	300 V
Ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
Air pressure acc. to SN 31205	90 ... 106 kPa
Relative humidity during operation	10 ... 95 %
Installation altitude at height above sea level maximum	2 000 m
Vibration resistance acc. to IEC 60068-2-6	5 ... 500 Hz: 0,075 mm
Shock resistance	8g / 10 ms
Surge voltage resistance Rated value	4 000 V
EMC emitted interference	EN 60947-5-1
Installation environment regarding EMC	This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	KT
Equipment marking acc. to DIN EN 61346-2	F

<b>Number of sensor inputs</b> • 1-channel or 2-channel	1
<b>Design of the cascading</b>	none
<b>Type of the safety-related wiring of the inputs</b>	single-channel and two-channel
<b>Product property cross-circuit-proof</b>	Yes
<b>Safety Integrity Level (SIL)</b> • acc. to IEC 61508 • for delayed release circuit acc. to IEC 61508	SIL3 SIL2
<b>SIL Claim Limit (subsystem) acc. to EN 62061</b>	3
<b>Performance level (PL)</b> • acc. to EN ISO 13849-1 • for delayed release circuit acc. to EN ISO 13849-1	e d
<b>Category acc. to EN 954-1</b>	4
<b>Category acc. to EN ISO 13849-1</b>	4
<b>Hardware fault tolerance acc. to IEC 61508</b>	1
<b>Safety device type acc. to IEC 61508-2</b>	Type A
<b>PFHD with high demand rate acc. to EN 62061</b>	0.0000000027 1/h
<b>Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508</b>	0.0000024 1/y
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>Number of outputs as contact-affected switching element</b> • as NC contact — for signaling function instantaneous contact • as NO contact — safety-related instantaneous contact — safety-related delayed switching	1 2 2
<b>Number of outputs as contact-less semiconductor switching element</b> • safety-related — delayed switching — instantaneous contact • for signaling function — delayed switching — instantaneous contact	0 0 0 0
<b>Stop category acc. to DIN EN 60204-1</b>	0 + 1

#### General technical data:

<b>Design of input</b> • cascading input/functional switching • feedback input	No Yes
--	-----------

• Start input	Yes
Type of electrical connection Plug-in socket	Yes
Operating frequency maximum	1 000 1/h
Switching capacity current	
• of the NO contacts of the relay outputs	
— at DC-13	
— at 24 V	5 A
— at 115 V	0.2 A
— at 230 V	0.1 A
— at AC-15	
— at 115 V	5 A
— at 230 V	5 A
• of the NC contacts of the relay outputs	
— at DC-13	
— at 24 V	5 A
— at 115 V	0.2 A
— at 230 V	0.1 A
— at AC-15	
— at 115 V	5 A
— at 230 V	5 A
Thermal current of the switching element with contacts maximum	5 A
Electrical endurance (switching cycles) typical	100 000
Mechanical service life (switching cycles) typical	10 000 000
Design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 6 A, or quick: 10 A
DC resistance of the cable maximum	30 $\Omega$
Cable length between sensor and electronic evaluation device with Cu 1.5 mm <sup>2</sup> and 150 nF/km maximum	1 000 m
Make time with automatic start	
• for DC maximum	80 ms
Backslide delay time in the event of power failure	
• maximum	100 ms
Adjustable OFF-delay time after opening of the safety circuits	0.5 ... 30 s
Recovery time after power failure typical	1 000 ms
Pulse duration	
• of the sensor input minimum	25 ms
• of the ON pushbutton input minimum	0.025 s
<b>Control circuit/ Control:</b>	
Type of voltage of the control supply voltage	DC
Control supply voltage 1	

<ul style="list-style-type: none"> <li>• for DC Rated value</li> </ul>	24 V
<b>Operating range factor control supply voltage rated value of the magnet coil</b>	
<ul style="list-style-type: none"> <li>• with AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> <li>• for DC</li> </ul>	0.85 ... 1.1
	0.85 ... 1.1
	0.85 ... 1.1

Installation/ mounting/ dimensions:	
<b>mounting position</b>	any
<b>Mounting type</b>	screw and snap-on mounting
<b>Width</b>	44.8 mm
<b>Height</b>	138.5 mm
<b>Depth</b>	120 mm

Connections/ Terminals:	
<b>Type of electrical connection</b>	screw-type terminals
<b>Type of connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded <ul style="list-style-type: none"> <li>— with core end processing</li> </ul> </li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<b>Type of connectable conductor cross-section for AWG conductors</b>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	2x (20 ... 14)
<ul style="list-style-type: none"> <li>• stranded</li> </ul>	2x (20 ... 14)

Product Function:	
<b>Product function</b>	
<ul style="list-style-type: none"> <li>• Light barrier monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• Standstill monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• protective door monitoring</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Automatic start</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• magnetically operated switch monitoring NC-NO</li> </ul>	No
<ul style="list-style-type: none"> <li>• rotation speed monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• laser scanner monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• monitored start-up</li> </ul>	No
<ul style="list-style-type: none"> <li>• Light array monitoring</li> </ul>	No
<ul style="list-style-type: none"> <li>• magnetically operated switch monitoring NC-NC</li> </ul>	No
<ul style="list-style-type: none"> <li>• EMERGENCY OFF function</li> </ul>	No
<ul style="list-style-type: none"> <li>• Pressure-sensitive mat monitoring</li> </ul>	Yes
<b>Suitability for interaction press control</b>	No
<b>Suitability for use</b>	

- |   |     |
|---|-----|
| • Monitoring of floating sensors          | Yes |
| • Monitoring of non-floating sensors      | No  |
| • safety switch                           | Yes |
| • position switch monitoring              | Yes |
| • EMERGENCY-OFF circuit monitoring        | No  |
| • valve monitoring                        | No  |
| • tactile sensor monitoring               | No  |
| • magnetically operated switch monitoring | No  |
| • safety-related circuits                 | Yes |

#### Certificates/ approvals:

<b>Certificate of suitability</b>	BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508
• TÜV (German technical inspectorate) certificate	Yes
• UL approval	Yes
• BG BIA certificate	Yes

#### General Product Approval

#### EMC

#### Functional Safety/Safety of Machinery



#### Declaration of Conformity

#### Test Certificates

#### other



[Special Test Certificate](#)

[Environmental Confirmations](#)

[Confirmation](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK28281BB40>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3TK28281BB40>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TK28281BB40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TK28281BB40&lang=en)

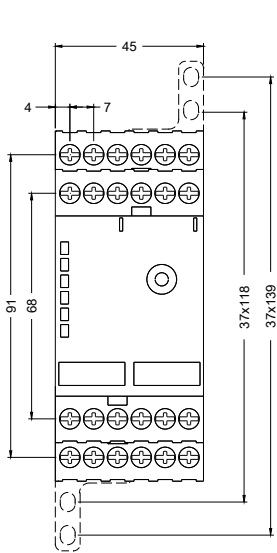

last modified:

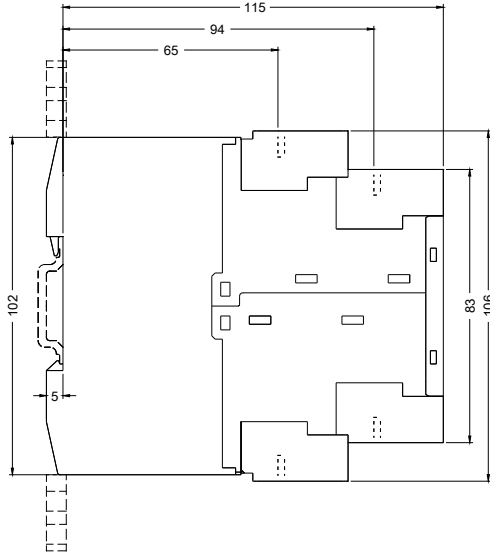

05.05.2015