



SIRIUS SAFETY RELAY WITH RELAY RELEASE
CIRCUITS (RC),
DC 24V, 45.0MM, SCREW TERMINAL,
RC INSTANT.: 2S, 2OE, RC DELAYED: 0,
MK: 0, PRESS CONTROL UNIT,
MAX. ACHIEVABLE SIL: 3, PL: E

General technical details:

product brand name		SIRIUS
product designation		safety relays
Design of the product		for press control units
protection class IP / of the housing		IP20
Protection class IP / of the terminal		IP20
Protection against electrical shock		finger-safe
Insulation voltage / rated value	V	300
Ambient temperature		
• during storage	°C	-40 ... 80
• during operating phase	°C	-25 ... 60
Air pressure		
• according to SN 31205	kPa	90 ... 106
Relative humidity		
• during operating phase	%	10 ... 95
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against vibration / according to IEC 60068-2-6		5 ... 500 Hz: 0,075 mm
Resistance against shock		8g / 10 ms
Impulse voltage resistance / rated value	V	4,000
EMC emitted interference		EN 60947-5-1

Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		KT
• according to DIN EN 61346-2		F
Number of sensor inputs		
• 2-channel		1
Design of the cascading		none
Type of the safety-related wiring / of the inputs		two-channel
Product feature / transverse contact-secure		Yes
safety Integrated Level / according to IEC 61508		SIL3
SIL claim limit (for a subsystem) / according to EN 62061		3
Performance level (PL) / according to ISO 13849-1		e
Category / according to EN 954-1		4
Category / according to ISO 13849-1		4
Probability of dangerous failure per hour (PFHD) / with high demand rate / according to EN 62061	1/h	0.13999999999999999E-8
T1 value / for proof test interval or service life / according to IEC 61508	a	20
Number of outputs / as contact-affected switching element		
• as NC contact / for reporting function / instantaneous switching		0
• as NO contact / safety-related / instantaneous switching		4
• as NO contact / safety-related/ delayed switching		0
Number of outputs / as contact-less semiconductor switching element		
• safety-related		
• delayed switching		0
• non-delayed		0
• for reporting function		
• delayed switching		0
• non-delayed		0
Stop category / according to DIN EN 60204-1		0

General technical details:

Design of the input		
• cascading-entrance/operation-even switching		No
• reducing-entrance		Yes
• start-up entrance		No
Design of the electrical connection / jumper socket		Yes
Operating cycles / maximum	1/h	1,000
Switching capacity current / of the NO contacts of the relay outputs		
• at DC-13		

• at 24 V	A	6
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
Switching capacity current / of the NC contacts of the relay outputs		
• at DC-13		
• at 24 V	A	6
• at 115 V	A	0.2
• at 230 V	A	0.1
• at AC-15		
• at 115 V	A	5
• at 230 V	A	5
Thermal current / of the contact-affected switching element / maximum	A	6
Electrical operating cycles as operating time / typical		100,000
Mechanical operating cycles as operating time / typical		10,000,000
Design of the fuse link / for short-circuit protection of the NO contacts of the relay outputs / required		gL/gG: 6 A, or quick: 10 A
Resistance to direct current / of the cable / maximum	Ω	30
Cable length / between sensor and electronic evaluation device / with Cu 1.5 mm² and 150 nF/km / maximum	m	1,000
Make time / with automatic start		
• for DC / maximum	ms	100
Recovery time / after opening of the safety circuits / typical	ms	250

Control circuit:

Type of voltage / of the controlled supply voltage		DC
Control supply voltage / 1 / for DC / rated value	V	24
Working range factor supply voltage rated value / of the magnet coil		
• at 50 Hz		
• for AC		0.85 ... 1.1
• at 60 Hz		
• for AC		0.85 ... 1.1
• for DC		0.85 ... 1.1

Installation/mounting/dimensions:

Built in orientation		any
Type of mounting		screw and snap-on mounting
Width	mm	44.8

Height	mm	138.5
Depth	mm	120

Connections:

Design of the electrical connection		screw-type terminals
Type of the connectable conductor cross-section		
<ul style="list-style-type: none"> • solid • finely stranded • with wire end processing 		1x (0.5 ... 4 mm ²), 2x (0.5 ... 2.5 mm ²)
		1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
Type of the connectable conductor cross-section / for AWG conductors		
<ul style="list-style-type: none"> • solid • stranded 		2x (24 ... 16)
		2x (24 ... 16)

Product Function:

Product function		
<ul style="list-style-type: none"> • light barrier monitoring • standstill monitoring • protective door monitoring • automatic start • magnetic switch monitoring Normally closed contact-Normally open contact • rotation speed monitoring • laser scanner monitoring • monitored start-up • light grid monitoring • magnetic switch monitoring Normally closed contact-Normally closed contact • emergency stop function • step mat monitoring 		No No No No No No No No No No No No
Suitability for interaction / pressing control		Yes
Acceptability for application		
<ul style="list-style-type: none"> • safety cut-out switch • position switch monitoring • EMERGENCY-OFF circuit monitoring • opto-electronical protection device monitoring • magnetically operated switches monitoring • proximity switches monitoring • safety-related circuits 		Yes Yes Yes No No No Yes

Certificates/approvals:

Verification of suitability

- TÜV (German technical inspectorate) certificate
- UL-registration
- BG BIA certificate

BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508, EN 574

Yes
Yes
Yes

General Product Approval

[CQC](#)



[ROSTEST](#)



Functional Safety / Safety of Machinery

[BG](#)

[SUVA](#)

[TÜV](#)

Test Certificates

[Manufacturer](#)

other

[Manufacturer](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3TK2834-1BB40/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TK2834-1BB40

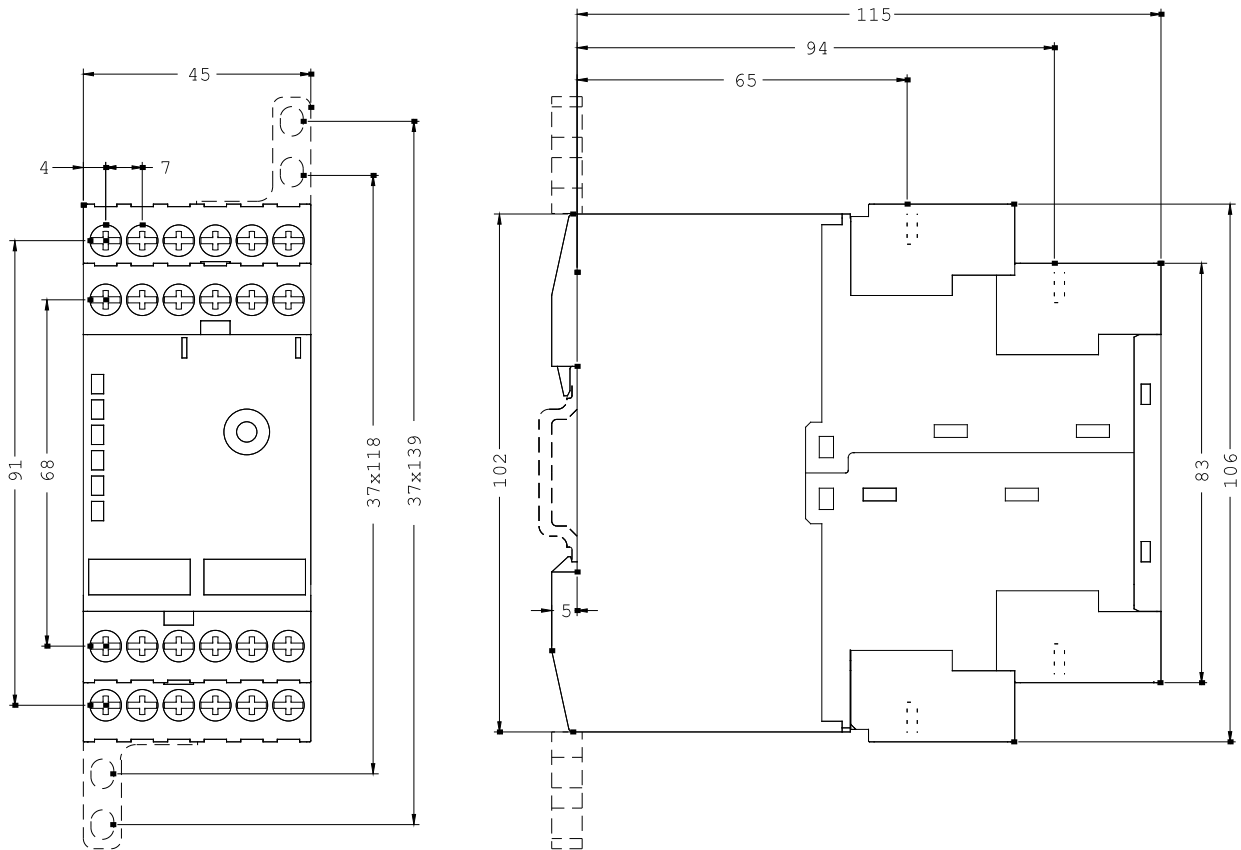

last change:

Jun 20, 2011