



Basic unit SIMOCODE pro V PN GP , Ethernet/PROFINET IO, PN system redundancy, OPC UA server, Web server, transmission rate 100 Mbps, 1 x bus connection via RJ45, 4 I/3 Q freely parameterizable, Us: 24 V DC, input for thermistor connection Monostable relay outputs, expandable by 1 extension module(DM, TM, EM)

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Motor management system
<b>design of the product</b>	basic unit 3
<b>product type designation</b>	SIMOCODE pro V PN GP
<b>General technical data</b>	
<b>product function</b>	
• bus communication	Yes
• data acquisition function	Yes
• diagnostics function	Yes
• password protection	Yes
• test function	Yes
• maintenance function	Yes
<b>product component</b>	
• input for thermistor connection	Yes
• digital input	Yes
• input for analog temperature sensors	No
• input for ground fault detection	No
• relay output	Yes
<b>product extension</b>	
• temperature monitoring module	Yes
• current measuring module	Yes
• current/voltage measuring module	No
• fail-safe digital I/O module	No
• ground-fault monitoring module	Yes
• control unit with display	No
• control unit	Yes
• analog I/O module	No
<b>consumed active power</b>	3.9 W
insulation voltage with degree of pollution 3 at AC rated value	300 V
<b>surge voltage resistance rated value</b>	4 000 V
<b>protection class IP</b>	IP20
<b>shock resistance</b>	
• according to IEC 60068-2-27	15g / 11 ms
• vibration resistance	1-6 Hz / 15 mm; 6-500 Hz / 2 g
<b>switching capacity current of the NO contacts of the relay outputs at AC-15</b>	
• at 24 V	6 A
• at 120 V	6 A
• at 230 V	3 A
<b>switching capacity current of the NO contacts of the relay outputs at DC-13</b>	

- at 24 V
- at 60 V
- at 125 V

**mechanical service life (switching cycles) typical**

electrical endurance (switching cycles) typical

**buffering time in the event of power failure**

**reference code according to IEC 81346-2**

continuous current of the NO contacts of the relay outputs

- at 50 °C
- at 60 °C

**type of input characteristic**

**Substance Prohibitation (Date)**

**certificate of suitability**

- according to ATEX directive 2014/34/EU
- according to UKCA

explosion device group and category according to ATEX directive 2014/34/EU

2 A  
 0.55 A  
 0.25 A  
 10 000 000  
 100 000  
 0.02 s  
 F  
  
 6 A  
 5 A  
 Type 1 in accordance with EN 61131-2  
 08/31/2018  
  
 BVS 06 ATEX F001  
 ITS21UKEX0464  
 II (2) G, II (2) D, I (M2)

**Electromagnetic compatibility**

EMC emitted interference according to IEC 60947-1

EMC immunity according to IEC 60947-1

**conducted interference**

- due to burst according to IEC 61000-4-4
- due to conductor-earth surge according to IEC 61000-4-5
- due to conductor-conductor surge according to IEC 61000-4-5
- due to high-frequency radiation according to IEC 61000-4-6

**field-based interference according to IEC 61000-4-3**

**electrostatic discharge according to IEC 61000-4-2**

**conducted HF interference emissions according to CISPR11**

**field-bound HF interference emission according to CISPR11**

class A  
 corresponds to degree of severity 3  
  
 2 kV (power ports) / 1 kV (signal ports)  
 2 kV  
  
 1 kV  
  
 10 V  
  
 10 V/m  
 6 kV contact discharge / 8 kV air discharge  
 corresponds to degree of severity A  
  
 corresponds to degree of severity A

**Inputs/ Outputs**

**product function**

- parameterizable inputs
- parameterizable outputs

**number of inputs**

- for thermistor connection

number of digital inputs with a common reference potential

digital input version type 1 acc. to IEC 61131

input voltage at digital input at DC rated value

**number of outputs**

**number of semiconductor outputs**

**number of outputs as contact-affected switching element**

**switching behavior**

**type of relay outputs**

**wire length for digital signals maximum**

**wire length for thermistor connection**

- with conductor cross-section = 0.5 mm<sup>2</sup> maximum
- with conductor cross-section = 1.5 mm<sup>2</sup> maximum
- with conductor cross-section = 2.5 mm<sup>2</sup> maximum

Yes  
 Yes  
 4  
 1  
 4  
 Yes  
 24 V  
 3  
 0  
 3  
  
 monostable  
 Monostable  
 300 m  
  
 50 m  
 150 m  
 250 m

**Protective and monitoring functions**

**product function**

- asymmetry detection
- blocking current evaluation
- power factor monitoring
- ground fault detection
- phase failure detection
- phase sequence recognition
- voltage detection
- monitoring of number of start operations

Yes  
 Yes  
 No  
 Yes  
 Yes  
 No  
 No  
 Yes

• overvoltage detection	No
• overcurrent detection 1 phase	Yes
• undervoltage detection	No
• undercurrent detection 1 phase	Yes
• active power monitoring	No
<b>product function</b>	
• current detection	Yes
• overload protection	Yes
• evaluation of thermistor motor protection	Yes
<b>total cold resistance number of sensors in series maximum</b>	1.5 k $\Omega$
<b>response value of thermoresistor</b>	3 400 ... 3 800 $\Omega$
• of the short-circuit control	9 $\Omega$
<b>release value of thermoresistor</b>	1 500 ... 1 650 $\Omega$

#### Motor control functions

<b>product function</b>	
• parameterizable overload relay	Yes
• circuit breaker control	Yes
• direct start	Yes
• reverse starting	Yes
• star-delta circuit	Yes
• star-delta reversing circuit	No
• Dahlander circuit	No
• Dahlander reversing circuit	No
• pole-changing switch circuit	No
• pole-changing switch reversing circuit	No
• slide control	No
• valve control	No

#### Communication/ Protocol

• protocol is supported PROFIBUS DP protocol	No
• protocol is supported PROFINET IO protocol	Yes
• protocol is supported PROFI-safe protocol	No
• protocol is supported Modbus RTU	No
• protocol is supported EtherNet/IP	No
• protocol is supported OPC UA Server	Yes
• protocol is supported LLDP	Yes
• protocol is supported Address Resolution Protocol (ARP)	Yes
• protocol is supported SNMP	Yes
• protocol is supported HTTPS	Yes
• protocol is supported NTP	Yes
• protocol is supported Media Redundancy Protocol (MRP)	No
• product function is supported Device Level Ring (DLR)	No
<b>number of interfaces</b>	
• according to PROFINET	1
• according to PROFIBUS	0
• according to Ethernet/IP	0
<b>product function</b>	
• web server	Yes
• shared device	No
• at the Ethernet interface Autocrossover	Yes
• at the Ethernet interface Autonegotiation	Yes
• at the Ethernet interface Autosensing	Yes
• Media Redundancy Protocol for Planned Duplication (MRPD)	No
• is supported PROFINET system redundancy (S2)	Yes; S2 in conjunction with SIMATIC PCS 7 CPU 410-5H
• supports PROFIenergy measured values	Yes
• supports PROFIenergy shutdown	Yes
<b>transfer rate maximum</b>	100 Mbit/s
<b>PROFINET conformity class</b>	B
<b>identification &amp; maintenance function</b>	
• I&M0 - device-specific information	Yes

<ul style="list-style-type: none"> <li>• I&amp;M1 – higher level designation/location designation</li> <li>• I&amp;M2 - installation date</li> <li>• I&amp;M3 - comment</li> </ul>	Yes Yes Yes
type of electrical connection of the communication interface	1 x RJ45

### Installation/ mounting/ dimensions

<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting
<b>height</b>	111 mm
<b>width</b>	45 mm
<b>depth</b>	124 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>• top</li> <li>• bottom</li> <li>• left</li> <li>• right</li> </ul>	40 mm 40 mm 0 mm 0 mm

### Connections/ Terminals

<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• at AWG cables solid</li> <li>• at AWG cables stranded</li> </ul>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 1x (20 ... 12), 2x (20 ... 14) 1x (20 ... 14), 2x (20 ... 16)
tightening torque with screw-type terminals	0.8 ... 1.2 N·m
tightening torque [lbf·in] with screw-type terminals	7 ... 10.3 lbf·in

### Ambient conditions

<b>installation altitude at height above sea level</b>	
<ul style="list-style-type: none"> <li>• 1 maximum</li> <li>• 2 maximum</li> <li>• 3 maximum</li> </ul>	2 000 m 3 000 m; max. +50 °C (no protective separation) 4 000 m; max. +40 °C (no protective separation)
<b>ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
<b>environmental category</b>	
<ul style="list-style-type: none"> <li>• during operation according to IEC 60721</li> <li>• during storage according to IEC 60721</li> <li>• during transport according to IEC 60721</li> </ul>	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4 2K2, 2C1, 2S1, 2M2
<b>relative humidity</b>	
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	5 ... 95 %
<b>contact rating of auxiliary contacts according to UL</b>	B300 / R300

### Short-circuit protection

design of short-circuit protection per output	Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I <sub>K</sub> < 500 A)
---	---

### Safety related data

<b>touch protection against electrical shock</b>	finger-safe
--	-------------

### Galvanic isolation

<b>(electrically) protective separation according to IEC 60947-1</b>	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)
--	--

### Control circuit/ Control

<b>product function soft starter control</b>	Yes
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage at DC</b>	
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	24 V
control supply voltage 1 at DC rated value	24 V
<b>operating range factor control supply voltage rated value at DC</b>	
<ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>	0.85 1.2
<b>inrush current peak</b>	

- at 24 V
- duration of inrush current peak
- at 24 V

17 A

1.1 ms

### Certificates/ approvals

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



[Confirmation](#)



For use in hazardous locations	Declaration of Conformity	Test Certificates
--------------------------------	---------------------------	-------------------



[Type Test Certificates/Test Report](#)

Test Certificates	Marine / Shipping
-------------------	-------------------

[Special Test Certificate](#)

[Special Test Certificate](#)



### other

[Confirmation](#)



### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7011-1AB00-2>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7011-1AB00-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3UF7011-1AB00-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UF7011-1AB00-2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7011-1AB00-2&lang=en)

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

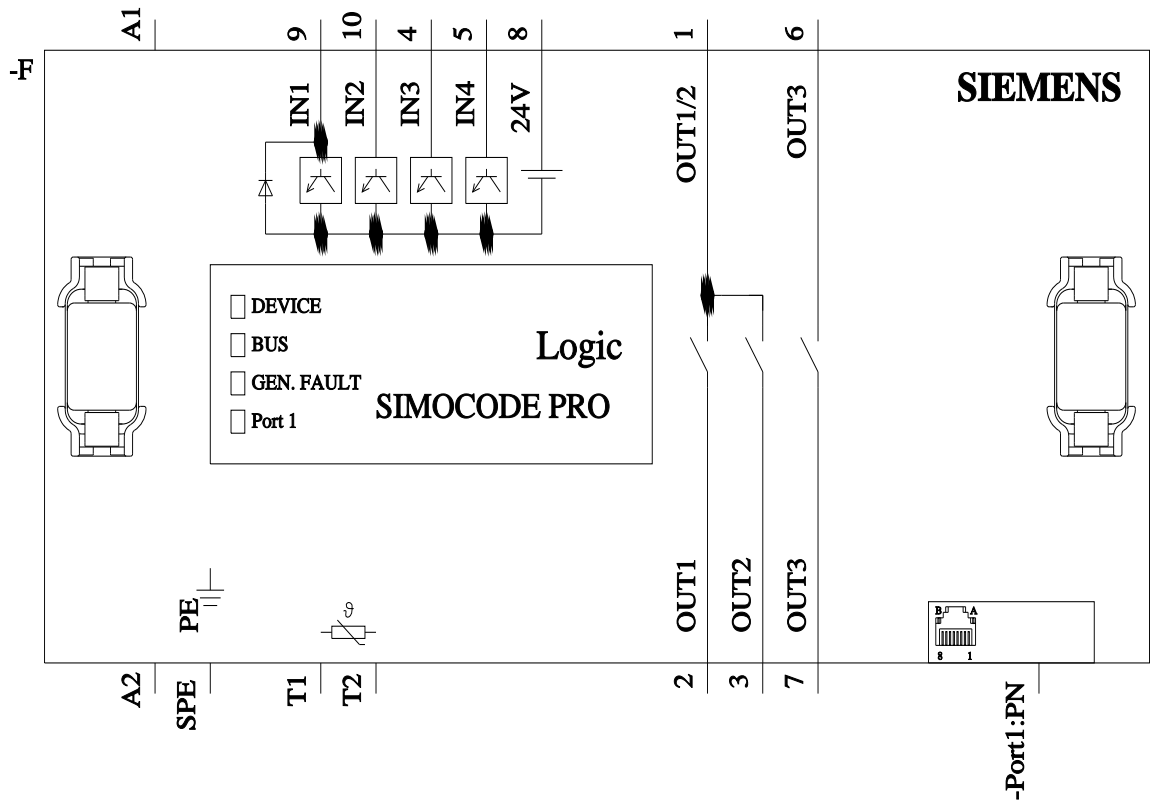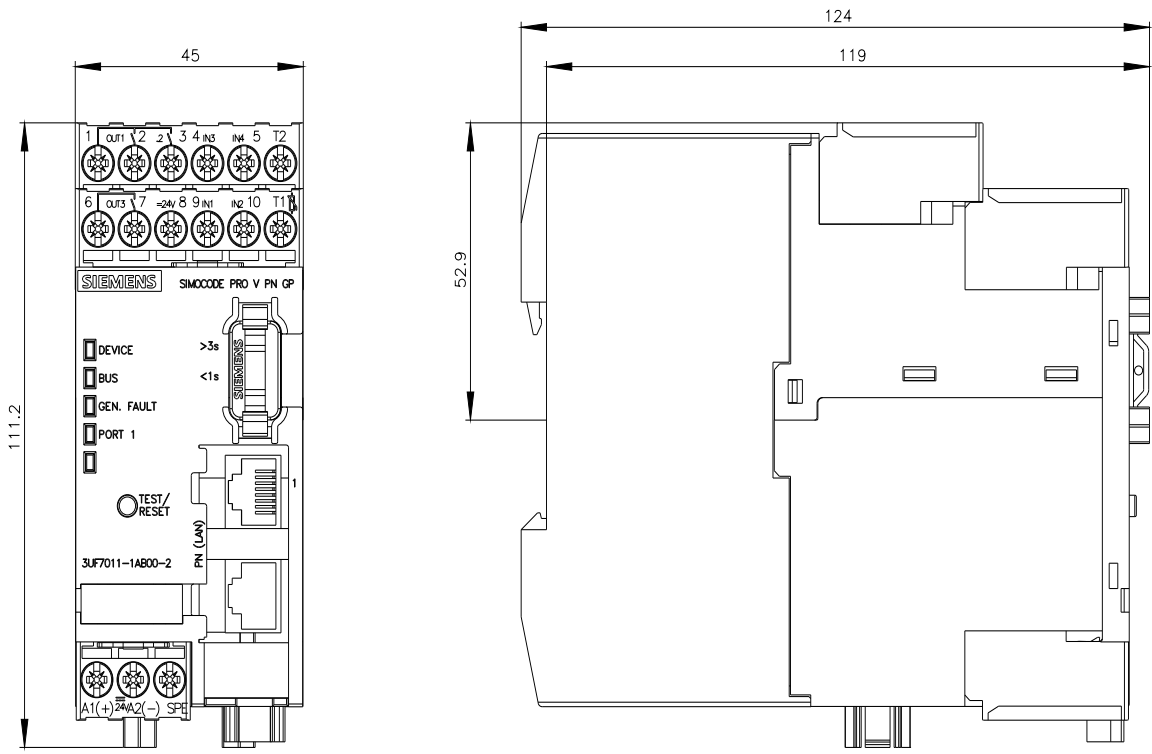

last modified:

4/8/2022

