



CONNECTION CABLE;  
 LENGTH 1,0M;  
 ROUND;  
 CONNECTION OF BASIC UNIT TO CURRENT  
 MEASURING MODULE,  
 CURRENT/VOLTAGE MEASUR. MODULE,  
 OPERATOR PANEL OR TO EXPANSION MODULES VIA  
 SYSTEM INTERFACE

General technical data:		
<b>product brand name</b>		SIRIUS
<b>product designation</b>		connecting cable
<b>Ambient temperature</b>		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +80
<b>Relative humidity</b>		
• during operating phase	%	5 ... 95

**Certificates/approvals:**

<b>General Product Approval</b>	<b>EMC</b>	<b>For use in hazardous locations</b>	<b>Test Certificates</b>
---------------------------------	------------	---------------------------------------	--------------------------



CCC



GOST



C-TICK

[Explosion Protection Certificate](#)

[Special Test Certificate](#)

### Shipping Approval



ABS



BUREAU VERITAS



DNV



GL



PRS

### other

[Confirmation](#)

[Declaration of Conformity](#)



Profibus

[PROFISafe-Certification](#)

[other](#)

### Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

#### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

#### Cax online generator:


<http://www.siemens.com/cax>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3UF7937-0BA00-0/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3UF7937-0BA00-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UF7937-0BA00-0)

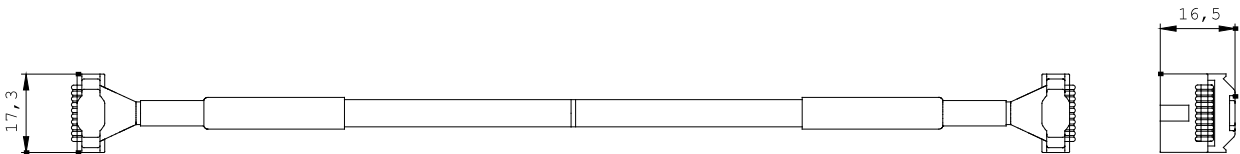

last change:

Dec 17, 2012