

wire connector 2 cables 3 units control wire voltage tap-off 3 units  
accessory for: 3VA1 250






Model	
Product brand name	SETRON
Product designation	accessories
Product version	circular conductor terminal

Connections according IEC	
IEC-marking / of terminals	25-150 mm <sup>2</sup> CU/AL NNL
Connectable conductor cross-section	
<ul style="list-style-type: none"> <li>• for copper cable / finely stranded / minimum</li> </ul>	25 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / finely stranded / maximum</li> </ul>	150 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / finely stranded / with core end processing / minimum</li> </ul>	25 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / finely stranded / with core end processing / maximum</li> </ul>	70 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / stranded / minimum</li> </ul>	25 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / stranded / maximum</li> </ul>	150 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for aluminum cable / stranded / minimum</li> </ul>	25 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for aluminum cable / stranded / maximum</li> </ul>	150 mm <sup>2</sup>

## Connections according UL

UL-marking / of terminals	TA2.3 CMC 4-300 CU7AL UR CSA
Permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
Wire stripping length	1.0 / 2.0 in
Connectable conductor cross-section	
<ul style="list-style-type: none"> <li>• for copper cable / stranded / minimum</li> <li>• for copper cable / stranded / maximum</li> <li>• for copper cable / finely stranded / minimum</li> <li>• for copper cable / finely stranded / maximum</li> <li>• for copper cable / finely stranded / with core end processing / minimum</li> <li>• for copper cable / finely stranded / with core end processing / maximum</li> <li>• for aluminum cable / stranded / minimum</li> <li>• for aluminum cable / stranded / maximum</li> </ul>	4 AWG 300 kcmil 4 AWG 300 kcmil 25 70 4 AWG 300 kcmil

## Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
<a href="#">Miscellaneous</a>		 RCM	 EG-Konf.	<a href="#">Type Test Certificates/Test Report</a>
				<a href="#">Miscellaneous</a>

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9213-0JC22>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9213-0JC22>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9213-0JC22](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9213-0JC22)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

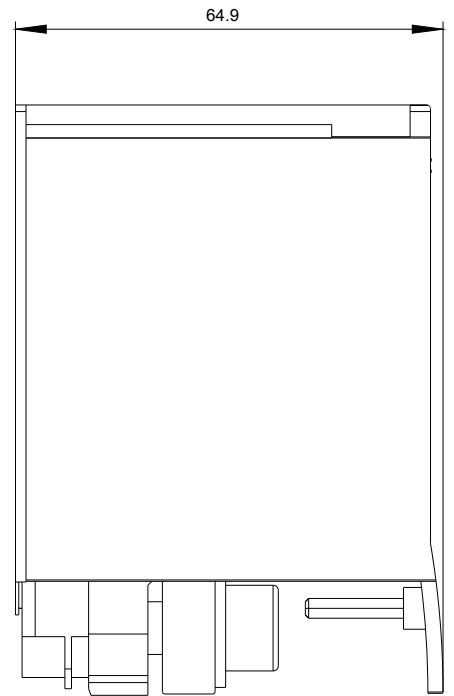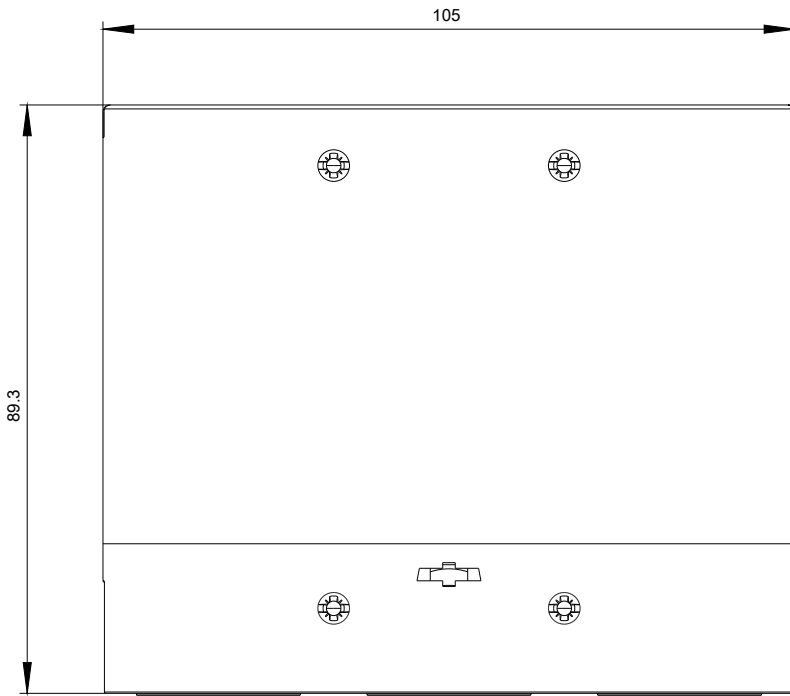

**last modified:**

12/07/2018