



UNDERVOLTAGE RELEASE 24 V DC ACCESSORY FOR 3VA1 and 3VA20 up to 3VA25

Model	
product brand name	SETRON
product designation	Accessories
Product version	Auxiliary release
Accessories	Auxiliary release
General technical data	
Degree of pollution	3
Overtoltage category	III
consumed active power / at DC / maximum	2.5 W
Voltage	
Tension assignée d'isolement U_i	690 V
surge voltage resistance	4 kV
control supply voltage (U_s) / at DC	24V
Mechanical Design	
Height	65.1 mm
Width	25.7 mm
number of slots	3
depth	28.8 mm
net weight	91 g
tightening torque / with screw-type terminals / minimum	0.4 N·m
tightening torque / with screw-type terminals / maximum	0.5 N·m
Connections according IEC	
stripped length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16
Connections according UL	
stripped length [in]	0.4 in
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in


Further information


Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3VA9908-0BB11>

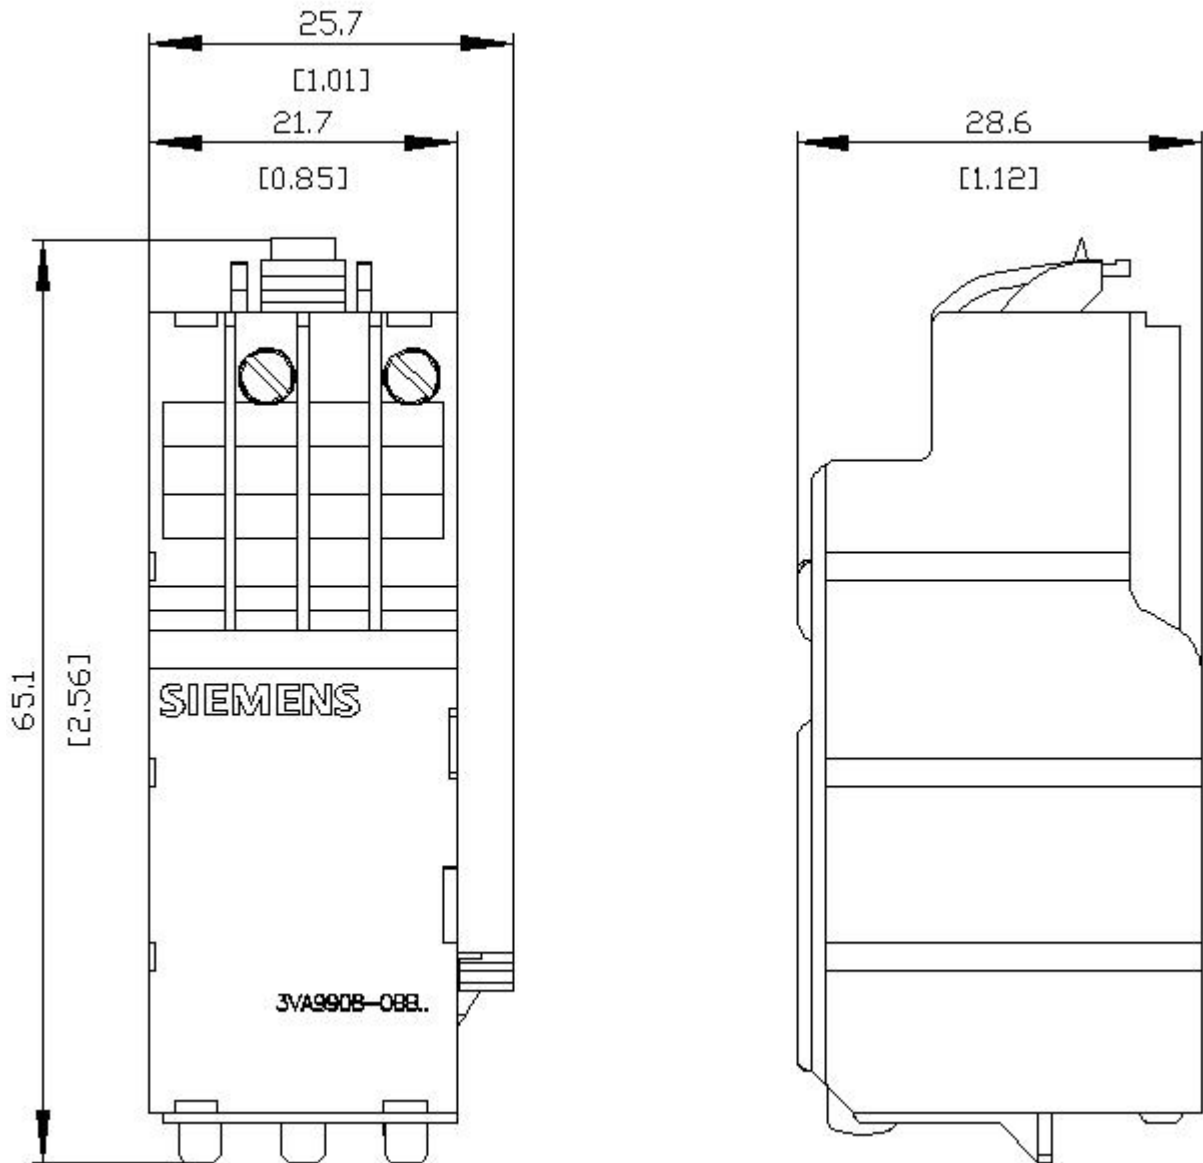

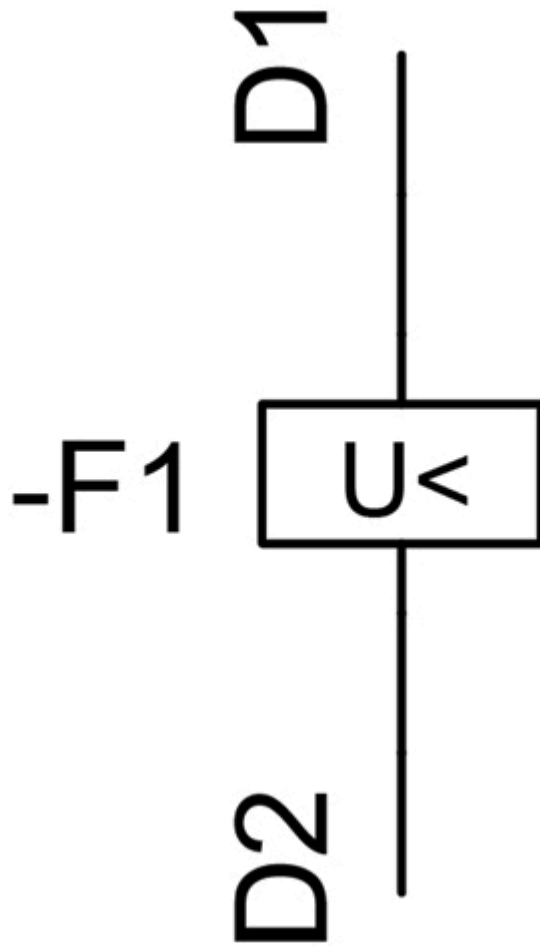

last modified:

12/20/2020 