



NEOZED FUSE LINK 400V GL, SIZE D01,  
6A IN FOLDING BOX

Similar to image

**Technical data:**

<b>Color coding of the fuse link</b>		green
<b>Current / for AC / rated value</b>	A	6
<b>Operating class of the fuse link</b>		gG
<b>Size of the fallback-system / acc. to DIN EN 60269-1</b>		D01
<b>Supply voltage</b> • for AC / rated value	V	400
<b>Switching capacity current / in accordance with IEC 60947-2 / rated value</b>	kA	50
<b>Design of the fuse link</b>		NEOZED fuse links
<b>mounting position</b>		Any, preferably vertical
<b>Protection class IP</b>		IP20, with connected conductors
<b>Climatic class</b>		Up to 45°C at 95 % rel. humidity
<b>Ambient temperature</b> • minimum	°C	-5
• maximum	°C	40

**Certificates/approvals:**

General Product Approval			Declaration of Conformity	Test Certificates	
 GOST	 VDE	 ÖVE	 EG-Konf.	<a href="#">Special Test Certificate</a>	<a href="#">Type Test Certificates/Test Report</a>

other

[Environmental Confirmations](#)

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/5SE2306/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SE2306](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2306)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

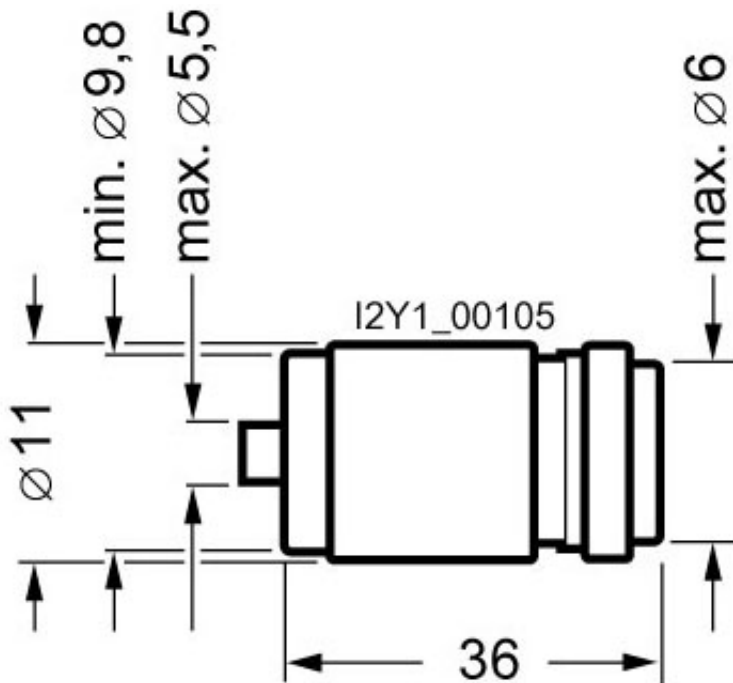

last change:

Feb 12, 2014