



NEOZED FUSE LINK 400V GL, SIZE D01,  
16A IN FOLDING BOX

Similar to image

**Technical data:**

|  |    |      |
|--|----|------|
| <b>Color coding of the fuse link</b>   |    | gray |
| <b>Current / for AC / rated value</b>  | A  | 16   |
| <b>Size of the fallback-system / acc. to DIN EN 60269-1</b>                      |    | D01  |
| <b>Supply voltage</b><br>• for AC / rated value                                  | V  | 400  |
| <b>Switching capacity current / in accordance with IEC 60947-2 / rated value</b> | kA | 50   |
| <b>Ambient temperature</b><br>• minimum  | °C | -5   |
| • maximum  | °C | 40   |

**Certificates/approvals:**

| General Product Approval  |   |   | Declaration of Conformity   | Test Certificates                        |  |
|---|---|---|---|--|--|
|  |  |  |  | <a href="#">Special Test Certificate</a> | <a href="#">Type Test Certificates/Test Report</a> |
| GOST  | VDE   | ÖVE   | EG-Konf.  |  |  |

**other**

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/5SE2316/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SE2316](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2316)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

Datanorm [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

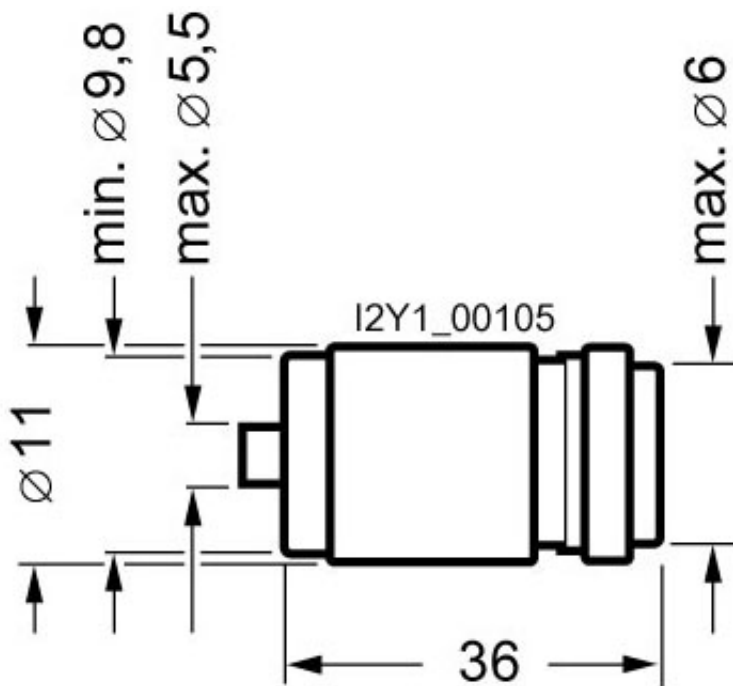

last change:

Sep 3, 2012