

RES.CURRENT OP.CIRCUIT BREAKER TYPE A 63A  
3+N-POL IFN 30MA 500V 4MW



Figure similar

Model		
product brand name		SENTRON
Product designation		RCCB
Design of the product		Instantaneous
General technical data		
Number of poles		4
Size of installation devices / acc. to DIN 43880		1
Protection against electrical shock		Finger and back-of-hand safe
Short-circuit current rating	kA	10
circuit-breaker / Design		5SM3
Mechanical service life (switching cycles) / typical		10 000
Overvoltage category		III
Supply voltage		
Supply voltage		
<ul style="list-style-type: none"> <li>at AC / Rated value</li> </ul>	V	500
<ul style="list-style-type: none"> <li>for testing equipment / minimum</li> </ul>	V	195
Protection class		

<b>Protection class IP</b>		IP20, if the distribution board is installed, with connected conductors
<b>Switching capacity</b>		
<b>Switching capacity current</b>		
• acc. to EN 60898 / Rated value	kA	0.8
<b>Dissipation</b>		
<b>Active power loss</b>		
• for rated value of the current / at AC / in hot operating state / per pole	W	4.9
<b>Electricity</b>		
<b>Tripping residual current / Rated value</b>	mA	30
rated current $I_n$ / IEC, DIN/VDE / at 40 °C el	A	63
<b>Type of fault current</b>		A
Current / at AC / Rated value	A	63
Surge current resistance / Rated value	kA	1
<b>Product details</b>		
<b>Product property</b>		
• halogen-free		Yes
• silicon-free		Yes
Product expansion / can be installed / supplementary devices		Yes
<b>Number</b>		
<b>Number of test cycles / for environmental testing / acc. to IEC 60068-2-30</b>		28
<b>Connections</b>		
<b>Connectable conductor cross-section / stranded</b>		
• minimum	mm <sup>2</sup>	1.5
• maximum	mm <sup>2</sup>	25
<b>Connectable conductor cross-section / solid</b>		
• minimum	mm <sup>2</sup>	1.5
• maximum	mm <sup>2</sup>	25
<b>Tightening torque / with screw-type terminals</b>		
• minimum	N·m	2.5
• maximum	N·m	3
Position / of power supply cord		top or bottom
<b>Mechanical Design</b>		
<b>Height</b>	mm	90
<b>Width</b>	mm	36
<b>Depth</b>	mm	70
<b>mounting position</b>		any

Installation depth	mm	70
Number of width units		4
Mounting type		DIN rail (REG)
Net weight	g	517

#### Environmental conditions

<b>Ambient temperature</b>		
• minimum	°C	-25
• maximum	°C	45
• during storage / minimum permissible	°C	-40
• during storage / maximum permissible	°C	75

#### Certificates

<b>Equipment marking</b>		
• acc. to DIN EN 61346-2		F
• acc. to DIN EN 81346-2		F

<b>General Product Approval</b>	<b>Test Certificates</b>	<b>other</b>
---------------------------------	--------------------------	--------------



[sonstig](#)

[sonstig](#)

[Umweltbestätigung](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SM33566>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/5SM33566/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=5SM33566](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5SM33566)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://ausschreibungstexte.siemens.com/tiplv>

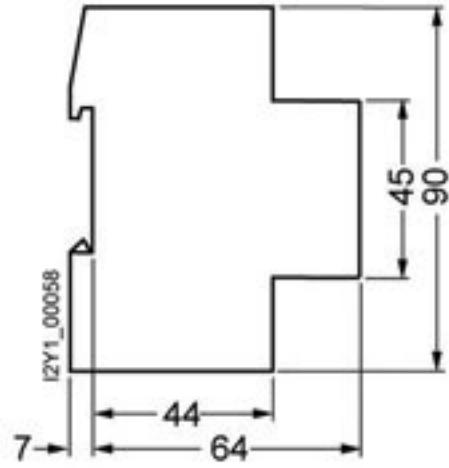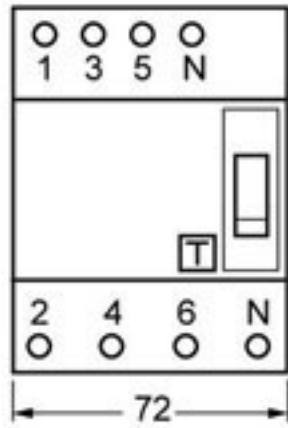

last modified:

23.07.2015