

5SM3614-6 RCCB TYPE A 40/2 300MA 2MW

Technical / CAx data

Technical Data CAx data



Similar to image

RES.CURRENT OP.CIRCUIT BREAKER TYPE A PSE/SSF
40A 1+N-POL IFN 300MA 230V 2MW

Technical data:		
Type, explanations		RCCBs, type A, instantaneous
Type of mounting		DIN-Rail
Mounting depth	mm	70
Design of the fault-current type		A
Number of poles		2
Resistance against short-circuit current	kA	10
Number of pitch units for width		2
Size of installation devices / acc. to DIN 43880		1
Release fault-current / rated value	mA	300
Switching function / short-term delayed		No
Product feature / selective type		No
Supply voltage frequency / rated value	Hz	60
Resistance against the impulse current / rated value	kA	1
Breaking capacity current / rated value	kA	0.5
Breaking capacity current / acc. to EN 60898 / rated value	kA	0.5
Supply voltage / for AC / rated value	V	230
Current / for AC / rated value	A	40
circuit-breaker / Design		5SM3
I ² t-value / permissible	A ² ·s	70,000
Let-through current / permissible	kA	7,500
rated current I _n / IEC, DIN/VDE / at 50 Cel	A	38.4
rated current I _n / IEC, DIN/VDE / at 70 Cel	A	32
rated current I _n / IEC, DIN/VDE / at 65 Cel	A	33.6
rated current I _n / IEC, DIN/VDE / at 45 Cel	A	40
Break time / max. / permissible	s	0.1
rated current I _n / IEC, DIN/VDE / at 40 Cel	A	40
rated current I _n / IEC, DIN/VDE / at 55 Cel	A	36.8

rated current I_n / IEC, DIN/VDE / at 60 Cel	A	35.2
Product extension / can be installed / supplementary device		Yes
Ambient conditions / degree of protection acc. to EN 60529		IP20, with connected conductors
power loss	W	3.4
Short-circuit back-up fuse / maximum	A	63
CFC and silicone free		Yes
Terminal tightening torques		2,5 till 3,0 Nm
Terminal conductor cross-sections, solid and stranded		1,0 till 16 mm ²
Climatic resistance acc. to IEC 60068-2-30		28 cycles (55 °C; 95 % rel. humidity)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5SM3614-6/all>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM3614-6

Tender specifications

Datanorm GAEB81 GAEB83 RTF TXT

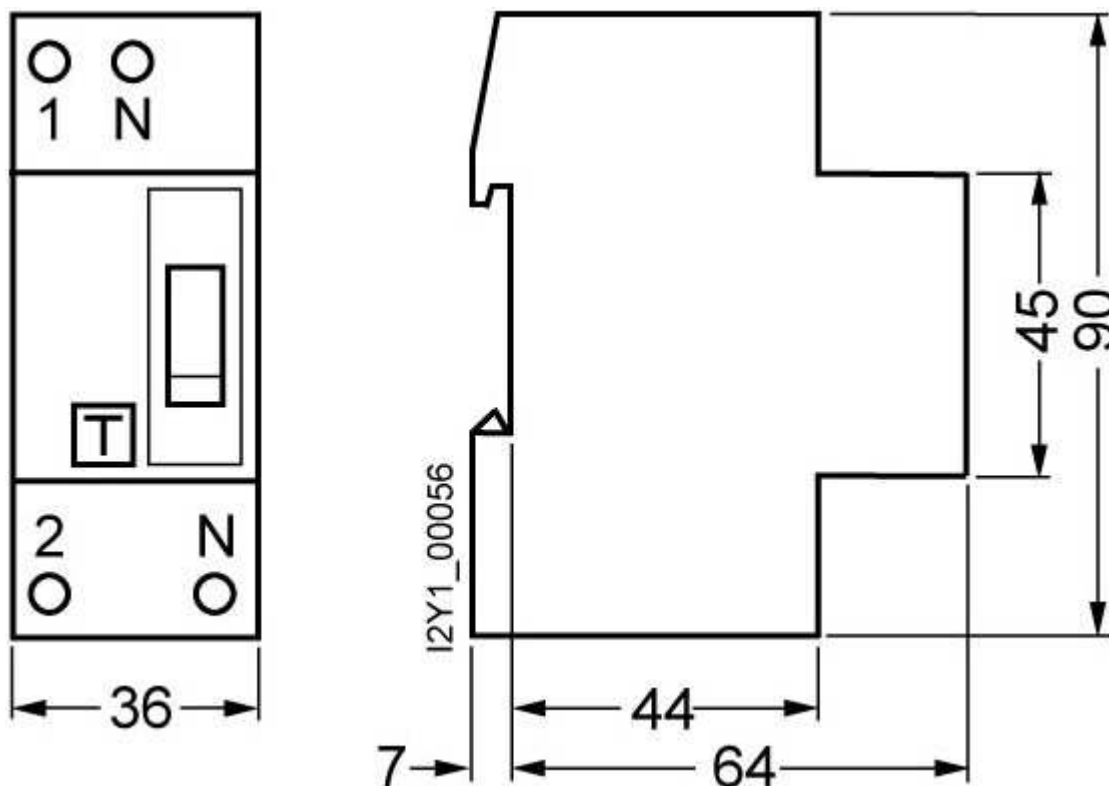

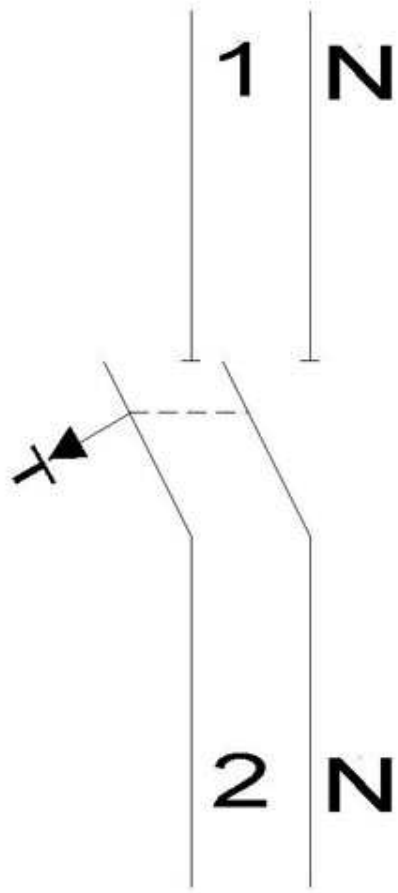

last change:

May 20, 2011