



SITOP BUFFER MODULE FOR 6EP1X3X-3BAX0  
 BUFFERING TIME 100 MS TILL 10 S DEPENDENT UPON  
 LOAD

## Technical specifications

### Input

Supply voltage / for DC / rated value 24 V

### Mains buffering

### Output

Output current / nominal value 40 A

### Efficiency

### Protection and monitoring

### Signaling

### Interface

Product component / PC interface No

Design of the interface without

### Safety

Galvanic isolation / between entrance and outlet Yes

Verification of suitability / UL-registration Yes

Verification of suitability / CE mark Yes

Protection class IP IP20

### EMC


### Operating data

Ambient temperature / in operation 0 ... 60 °C

Ambient temperature / on transport	-40 ... +85 °C
Ambient temperature / in storage	-40 ... +85 °C
<b>Mechanics</b>	
Design of the electrical connection	screw-type terminals
Width / of the housing	70 mm
Height / of the housing	125 mm
Depth / of the housing	125 mm
Installation width	70 mm
Required spacing / top	50 mm
Required spacing / bottom	50 mm
Required spacing / left	0 mm
Required spacing / right	0 mm
Net weight	1.2 kg

Product feature / of the housing / housing for side-by-side mounting

Yes

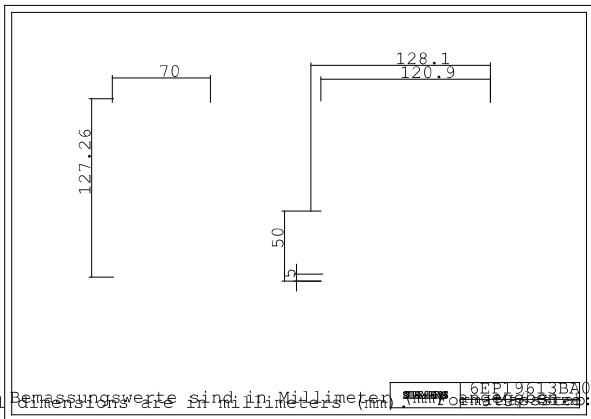

letzte Änderung:

May 14, 2012