



PLUG-IN COMMUNICATIONS MODULE SWITCHED ETHERNET PROFINET

Similar to image

General technical details:

product designation		Switched Ethernet Profinet module
Type of mounting		plug-in module for the module slot of the PAC3200 / 4200
Type of voltage supply		from PAC 3200 / 4200
Combustibility class acc. to UL 94		V 0
Mean time between failures (MTBF)	a	215.6
Item designation		P
<ul style="list-style-type: none"> • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2 		P

Communication:

Design of the electrical connection		2 x RJ45 socket
protocol / will be supported		PROFINET IO / Modbus TCP
Potential separation		Maximum insulation voltage: 500V AC

Dimensions and weights:

Width	mm	43
Height	mm	63
Depth	mm	22

Degree of protection

Protection class IP	IP20
---------------------	------

Ambient conditions:

Ambient temperature	°C	-5 ... +55
• during operating		
Degree of pollution		2 according to IEC 61131
Transfer rate / min.	kbit/s	10,000
Transfer rate / maximum	kbit/s	100,000

Certificates/approvals:

General Product Approval

EMC

Declaration of
Conformity

other



[Confirmation](#)

[PROFINET-Certification](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/7KM9300-0AE00-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AE00-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

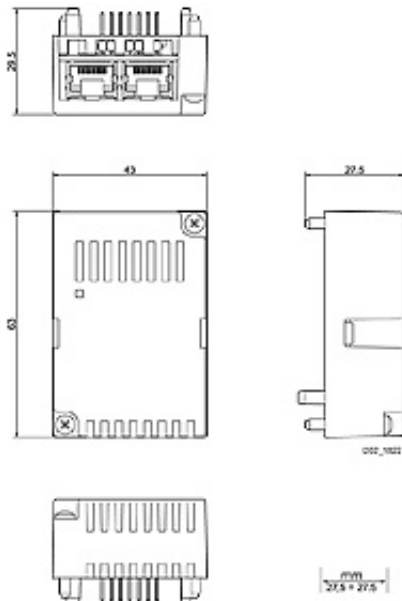

last change:

Feb 15, 2013