

SIGNALLING COLUMN SIREN ELEMENT ALTERNATING SOUND,
24V DC,105DB, IP40



Figure similar

General technical data:	
product brandname	SIRIUS
Product designation	Siren element
Type of voltage of the operating voltage	DC
Operating voltage	
• 1 at DC rated value	24 V
Relative positive tolerance of the operating voltage	10 %
Relative negative tolerance of the operating voltage	-10 %
Type of acoustic signal	Continuous tone / alternating tone
Loudness level	105 dB
Service life of acoustic signal device	5 000 h
Tone frequency	
• 1	2.5 kHz
• 2	3.5 kHz
Equipment marking	
• acc. to DIN EN 61346-2	P
• acc. to DIN EN 81346-2	P

Mechanical data:

Outer diameter of the signal column element	70 mm
---	-------

Ambient conditions:

Ambient temperature during operation	-20 ... +50 °C
--------------------------------------	----------------

Protection class IP	IP40
---------------------	------

Product function adjustable acoustic signal	No
---	----

Height	79 mm
--------	-------

Width	70 mm
-------	-------

Certificates/approvals

General Product Approval	EMC	Declaration of Conformity	other
--------------------------	-----	---------------------------	-------



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4420-0EA>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4420-0EA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4420-0EA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4420-0EA&lang=en

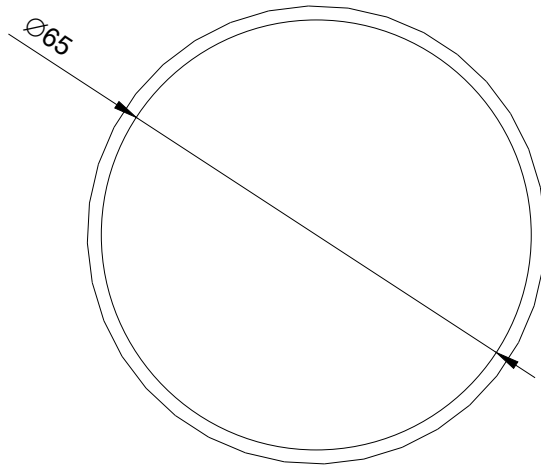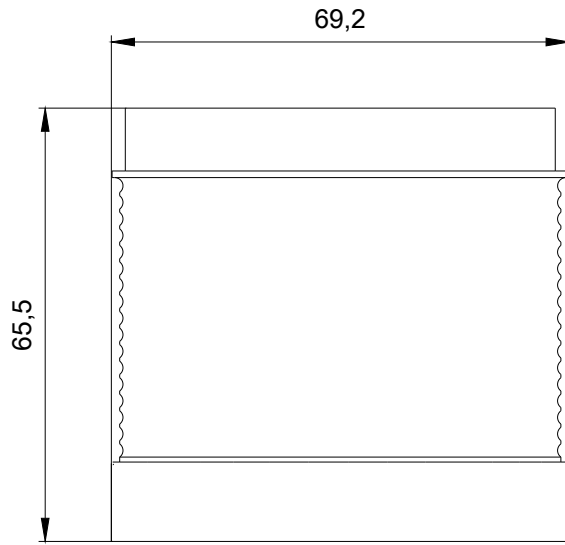

last modified:



W9.4444;
W6.8333; 8WD44..._ALL
07/26/2017