

PIN BUS BAR SHOCKHAZARD SAFETY,
16QMM 1 PHASE,
L= 1016MM WITHOUT END CAPS



Similar to image

Technical data:

Busbar design		laminated
Length	mm	1,016
Width	mm	13
Operating current / rated value	A	80
Thickness / of busbar	mm	3.5
Material / of the busbar		SF-Cu F 24
Caractéristique produit / flexible		Yes
Traitement de surface / étamé		No

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)


<http://www.siemens.com/lowvoltage/maill>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5ST3701/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3701

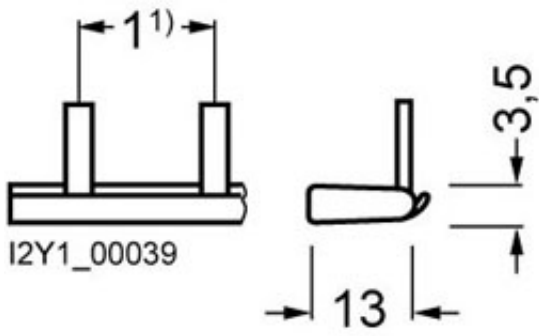

1) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Aug 25, 2011