

order number: H82050A0001

STX mounting rail distributor with 6xST Duplex adaptors, Multimode; metal sleeve/metal housing

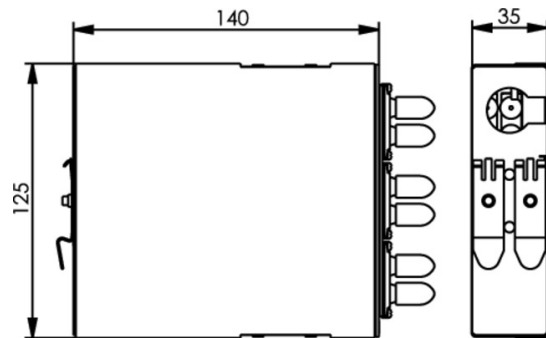


Fig. may differ

Technical Attributes	
	IP20
Housing	STX mounting rail distributor
Adaptors	6xST Duplex, phosphor bronze sleeve/metal housing
Type	Multimode

Description of the Series/Product Category

Notice: The following information refer to the series/product category as a whole. Please see the specific datasheet for specific technical information of a particular product.

For generic cabling in control cabinets, Telegärtner offers outlets and distributors which can be mounted directly next to one another on the mounting rail. They form the ideal connection between the arriving installation lines and the wiring inside the control cabinet. The components can be quickly and easily mounted on conventional TH 35 rails by simply clicking them in place.

Performance Characteristics

- For up to 24 fibers
- 3 individual cable inputs (top / bottom / rear)
- Rail mounting in 3 different possible positions

Mechanical Characteristics	
Dimensions in mm (1 HU): width	35 / 70
Cable entry	cable gland M20 for 5-9 mm
Panel piercings	ST Duplex, SC Duplex, LC Duplex, E2000 Compact
Dimensions in mm: Height	125
Dimensions in mm: Depth	140
Material: housing	sheet steel zinc plated, powder coated, light grey RAL 7035
Material: front plate	sheet steel zinc plated, powder coated, light grey RAL 7035
Material: top hat rail adaptor	sheet steel nickel plated

Vibration sinusoidal (9 Hz - 500 Hz)	50 ms ²
Flowing mixed gas	+25°C / 73% RH / 4 days, H ₂ S / SO ₂
Rapid change of temperature	-40° C to + 70° C / 25 cycles t=30 min.
Ambient temperature	-40° C to + 70° C
Climatic damp heat	+25° C / +65° C / 93% RH // -10° C / 21 cycles