


Tubular cable lugs with 45° angle 95 – 300 mm² euro-series

material: Cu according to DIN EN 13600

surface: tin plated

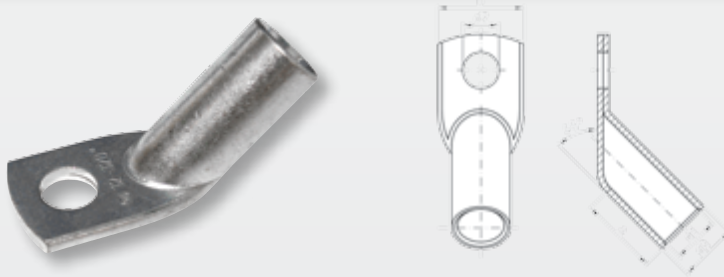

approvals:



cross section mm ²	flat hole M	art.-no.	dimensions in mm					weight 100 pcs./kg	packing unit (pcs.)	tool recommendation			
			d1	d3	d2	b	a			WW 10/120 141	AP 10 152, HPI 10 + HPW 10 153	API 20 156, HPI 20 + HPW 20 157	API 30 + HPI 30 161, API 35 + HPI 35 162, HPW 15 + HPW 17 163
95	8	16165	13,5	18	8,4	26	22	6,18	25	WW 10/120 141	AP 10 152, HPI 10 + HPW 10 153	API 20 156, HPI 20 + HPW 20 157	API 30 + HPI 30 161, API 35 + HPI 35 162, HPW 15 + HPW 17 163
	10	16166			10,5	26		6,20	25				
	12	16167			13	26		6,20	25				
	16	16168*			17	28		6,80	25				
120	8	16169	15	20	8,4	29	25	7,80	25				
	10	16170			10,5	29		8,90	25				
	12	16171			13	29		8,91	25				
	16	16172			17	30		9,31	25				
150	8	16173*	16,8	21,3	8,4	31	28	11,31	25				
	10	16174			10,5	31		9,80	25				
	12	16175			13	31		9,68	25				
	16	16176			17	31		10,12	25				
	20	16177*			21	35		10,12	25				
185	10	13178	19	24	10,5	35	29	12,35	20				
	12	13179			13	35		12,24	20				
	16	13180			17	35		12,84	20				
	20	13181			21	35		13,99	20				
240	10	13182	21	26	10,5	38	34	14,80	15				
	12	13183			13	38		15,46	15				
	16	13184			17	38		16,51	15				
	20	13185			21	38		17,04	15				
300	12	13187*	24	30	13	43	41	25,70	15				
	16	13188*			17	43		25,68	15				
	20	13189*			21	43		27,30	15				

3