


Tubular cable lugs with 90° angle, 50 – 300 mm² euro-series

material: Cu according to DIN EN 13600

surface: tin plated

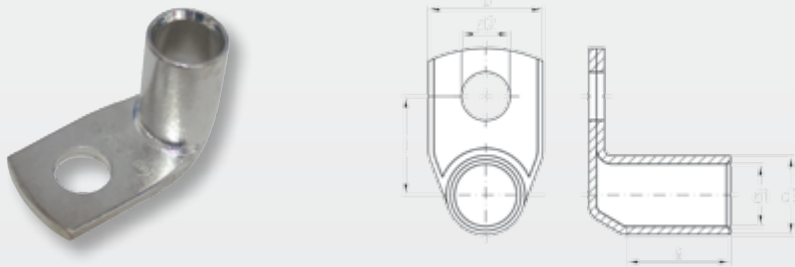

approvals:



cross section mm ²	flat hole M	art.-no.	dimensions in mm						weight 100 pcs./kg	packing units (pcs.)	tool recommendation			
			d1	d3	d2	b	l	a						
50	6	16324	10	14	6,4	20	17,5	18	3,00	100	WW 6/70 140	WW 10/120 141	AP 10 152, HPI 10 + HPW 10 153	API 30 + HPI 30 161, HPW 17 163, API 35 + HPI 35 162
	8	16325			8,4	20	19,5		3,22	100				
	10	16326			10,5	20	21,5		3,32	100				
	12	16327			13	23	22,5		3,28	100				
	14	16382			15	23	24,5		3,37	100				
	16	16328			17	27	28,5		3,63	100				
	20	16397			21	30	32,5		3,89	100				
70	6	16329	12	16,5	6,4	24	18,8	20	4,41	25				
	8	16330			8,4	24	20,8		4,86	25				
	10	16331			10,5	24	22,8		5,06	25				
	12	16332			13	24	23,8		4,94	25				
	14	16383			15	25	25,8		5,19	25				
	16	16333			17	28	26,8		5,11	25				
	20	16334			21	29	30,8		5,26	25				
95	8	16335	13,5	18	8,4	26	21,5	22	5,33	25				
	10	16336			10,5	26	23,5		5,59	25				
	12	16337			13	26	24,5		5,66	25				
	14	16384			15	26	26,5		5,89	25				
	16	16338			17	28	27,5		6,00	25				
120	8	16385	15	20	8,4	29	22,5	25	7,63	25				
	10	16340			10,5	29	24,5		8,07	25				
	12	16341			13	29	25,5		7,99	25				
	16	16342			17	30	28,5		8,46	25				
150	8	16344	16,8	21,3	8,4	31	25,7	28	8,03	25				
	10	16345			10,5	31	25,7		8,07	25				
	12	16346			13	31	26,7		8,29	25				
	16	16347			17	31	29,7		8,50	25				
	20	16348			21	35	33,7		8,89	25				
185	10	16349	19	24	10,5	35	27	29	11,41	25				
	12	16350			13	35	28		12,04	25				
	16	16351			17	35	31		12,48	25				
	20	16352			21	35	35		12,70	25				
240	10	16354	21	26	10,5	38	28	34	13,32	25				
	12	16355			13	38	29		13,40	25				
	16	16356			17	38	32		13,76	25				
	20	16357			21	38	36		14,23	25				
300	12	13360	24	30	13	43	31	41	19,92	20				
	16	13361			17	43	34		20,90	20				
	20	13362			21	43	38		21,81	20				

3