


**W-series terminal with clamping yoke connection
WDU 35**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

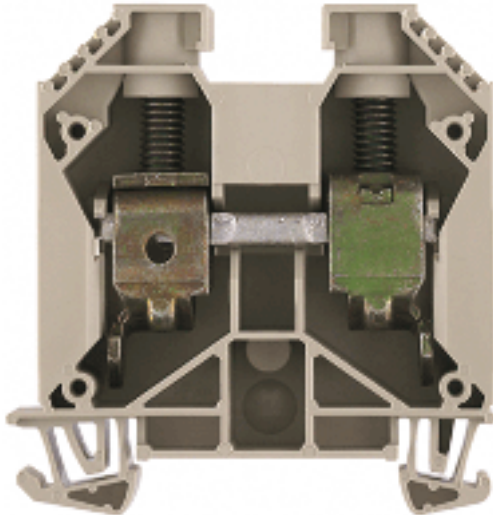

The versatile and extensive range of products - from 0.05 mm² to 300 mm² - means that you have diverse options for your applications at your disposal.

Hardened steel for mechanical strength and high-quality tinned copper for optimum conductivity. All materials comply with RoHS requirements and have been tested to current environment guidelines.

General ordering data

Order No.	1020500000
Part designation	WDU 35
Version	W-series terminal with clamping yoke connection, Feed-through terminal, Rated cross-section: 35 mm ² , Screw connection, Direct mounting
GTIN (EAN)	4008190077013
Qty.	40 pc(s).

**W-series terminal with clamping yoke connection
WDU 35**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

Dimensions

Length	60 mm	Width	16 mm
Height	63 mm	Weight	54 g

Temperature

Ambient temperature (operational)	-50 °C...+120 °C	Storage temperature	
-----------------------------------	------------------	---------------------	--

CSA ratings data

Certificate no.	200039-1352963	Voltage size C	1000 V
Current size C (CSA)	150 A	Conductor cross-section, min.	12 AWG

Strap connection

Strap 1, min.	3 layers 9 x 0.8	Strap 1, max.	9 layers 9 x 0.8
Strap 2, min.	6 x 9 x 0.8		

UL ratings data

Certificate no.	E60693VOL1SEC38	Voltage size C	1000 V
Current size C (UR)	150 A	Conductor size Factory wiring, max	0 AWG
Conductor size Factory wiring, min	12 AWG	Conductor size Field wiring, max	0 AWG

IECEX/ATEX rating data

Certificate no.	KEMA98ATEX1683U	ATEX certificate	KEMA98ATEX1683U_d.pdf
ATEX certificate	KEMA98ATEX1683U_e.pdf	Certificate no.	IECEXULD05.0008U
IEC Ex certificate	IECEXULD05.0008U_e.pdf	max. voltage	690 V
Current (ATEX)	109 A	Conductor cross-section, max.	35 mm ²
max. voltage	690 V	Current (IECEX)	109 A
Conductor cross-section, max.	35 mm ²	Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Marking EN 60079-7	Ex e II

Material data

Material	Wemid	Colour	dark beige
Flammability class UL 94	V-0		

System specifications

Product family	W-series terminal with clamping yoke connection	Type of connection	Screw connection
Connection direction	on side	Number of levels	1
No. of connections	2	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes		

**W-series terminal with clamping yoke connection
WDU 35**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Conductor cross-section, solid, 2 clampable conductor	2.5 mm ²	Solid, max.	10 mm ²
Conductor cross-section, stranded, 2 clampable conductor, min.	16 mm ²	Conductor cross-section, stranded, 2 clampable conductor, max.	16 mm ²
Flexible, min.	2.5 mm ²	Flexible, max.	16 mm ²
Conductor cross-section, flexible plus plastic collar DIN 46228/1, 2 clampable conductor, min.	2.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, 2 clampable conductor, max.	16 mm ²

Additional technical data

Explosion-tested version	Yes	Installation advice	Direct mounting
Number of identical terminals	1	Open sides	right
Type of mounting	Snap-on		

Conductors for clamping (additional connection)

Rated current	125 A	Type of connection	Screw connection
Clamping screw	M 6	Blade size	6.5 x 1.2 mm
Tightening torque, max.	5 Nm	Tightening torque, min.	4 Nm
Conductor connection cross-section AWG, min.	AWG 12	Conductor connection cross-section AWG, max.	AWG 10

Conductors for clamping (rated connection)

Type of connection	Screw connection	Stripping length	18 mm
Blade size	6.5 x 1.2 mm	Connection direction	on side
No. of connections	2	Clamping range, min.	2.5 mm ²
Clamping range, max.	50 mm ²	Clamping screw	M 6
Tightening torque, min.	4 Nm	Tightening torque, max.	5 Nm
Gauge to IEC 60947-1	B8	Conductor cross-section, solid, min.	2.5 mm ²
Conductor cross-section, solid, max.	16 mm ²	Stranded, min.	2.5 mm ²
Stranded, max.	50 mm ²	Conductor cross-section, flexible, max.	35 mm ²
Conductor cross-section, flexible plus plastic collar DIN 46228/1, rated connection, min.	2.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, rated connection, max.	35 mm ²
Conductor cross-section, flexible AEH plus plastic collar DIN 46228/4, rated connection, min.	2.5 mm ²	Conductor cross-section, flexible AEH plus plastic collar DIN 46228/4, rated connection, max.	35 mm ²
Twin wire-end ferrule, min.	1.5 mm ²	Twin wire-end ferrule, max.	16 mm ²
Conductor connection cross-section AWG, min.	AWG 12	Conductor connection cross-section AWG, max.	AWG 10

Rating data

Rated cross-section	35 mm ²	Rated voltage	1,000 V
Rated impulse withstand voltage	8 kV	Rated current	125 A
Current with max. conductor	150 A	Standards	IEC 60947-7-1
Pollution severity	3		

W-series terminal with clamping yoke connection WDU 35

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Technical data

Approvals

Approvals institutes	BURVER; CSA; CSAEX; CURUSEX; DETNORVER; GERMLLOYD; GOSTEX; IECEXULD; KEMAATEX; KEMAKEUR; LLOYDSREG; MARITREG; NEMKO; RINA; UR; CE
----------------------	---

Classifications

ETIM 2.0	EC000897	ETIM 3.0	EC000897
UNSPSC	30-21-18-11	eClass 4.1	27-14-11-20
eClass 5.1	27-14-11-20	eClass 6.0	27-14-11-20

Product notes

Note, ordering data	Order No. 1020500000 and 1020580000 (blue) versions without pegs (40 pcs.)
Note, accessories	Socket and test plug, see section "W-series accessories"
Product description	<p>Identical profiles from 2.5 to 10 mm² with uniform end and partition plates. An unsurpassed combination of many advantages!</p> <p>Their small size compared to the respective rated cross-section makes the modular terminals with the compact design very popular.</p>

Downloads

STEP	1020500000_09257_WDU_35_STP.stp
------	---

Datasheet

**W-series terminal with clamping yoke connection
WDU 35**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Drawings

