

Modular Signal Towers / KombiSIGN 72 TwinLIGHT Design 24VAC/DC BU



Part No.:	647.530.75
Series:	KombiSIGN 72



MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Clear
Protection category	IP65
Service life optical	50,000 h maximum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	1 g
Product weight	1 g


ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Rated operational current	80 mA
Rated inrush current	500 mA

OPTICAL DATA

Light source	LED
Light colour	Blue
Optical signal image	Blink Permanent TwinLight
Blink frequency (Hz)	1 Hz

DRAWING

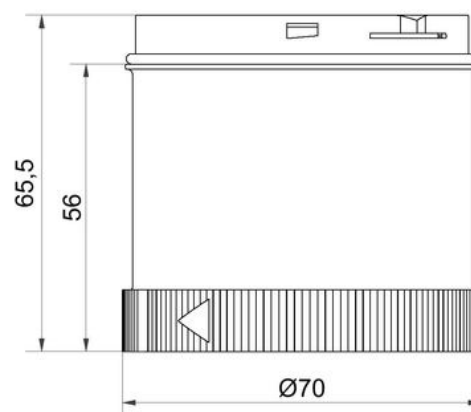

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.