

Blinking light element 841

(provisional technical data sheet)

Electrical specifications:

Operating voltage: $U_{nenn} = 24V/115V/230V$
 Bulb: max. 7W
 Working life: depending on the bulb used
 Blinking frequency: ca. 1Hz, pulse-duty factor 1:1
 Current consumption: depending on the bulb used
 Starting current: $< 0,5A$

Order-No.:

841 X00 55 Blinking light element 24V AC/DC
 841 X00 67 Blinking light element 115V AC/DC
 841 X00 68 Blinking light element 230V AC/DC

X 1=red 2=green 3=yellow 4=clear 5=blue

Note: All electrical and working life specifications refer to U_{nenn} and room temperature !


Mechanical specifications:

Material: Polycarbonate
 Socket: B15d (Bayonet)
 Seal: premounted with each element

Further specifications:

Mass: ca. 83g
 Temperature: $t_a -20^{\circ}C$ bis $+50^{\circ}C$
 Protection rating: IP 54 when mounted or with cap

Regulations: comply with VDE 0711-EN 60598
 24V and 230V AC/DC version
 UL and CSA listed

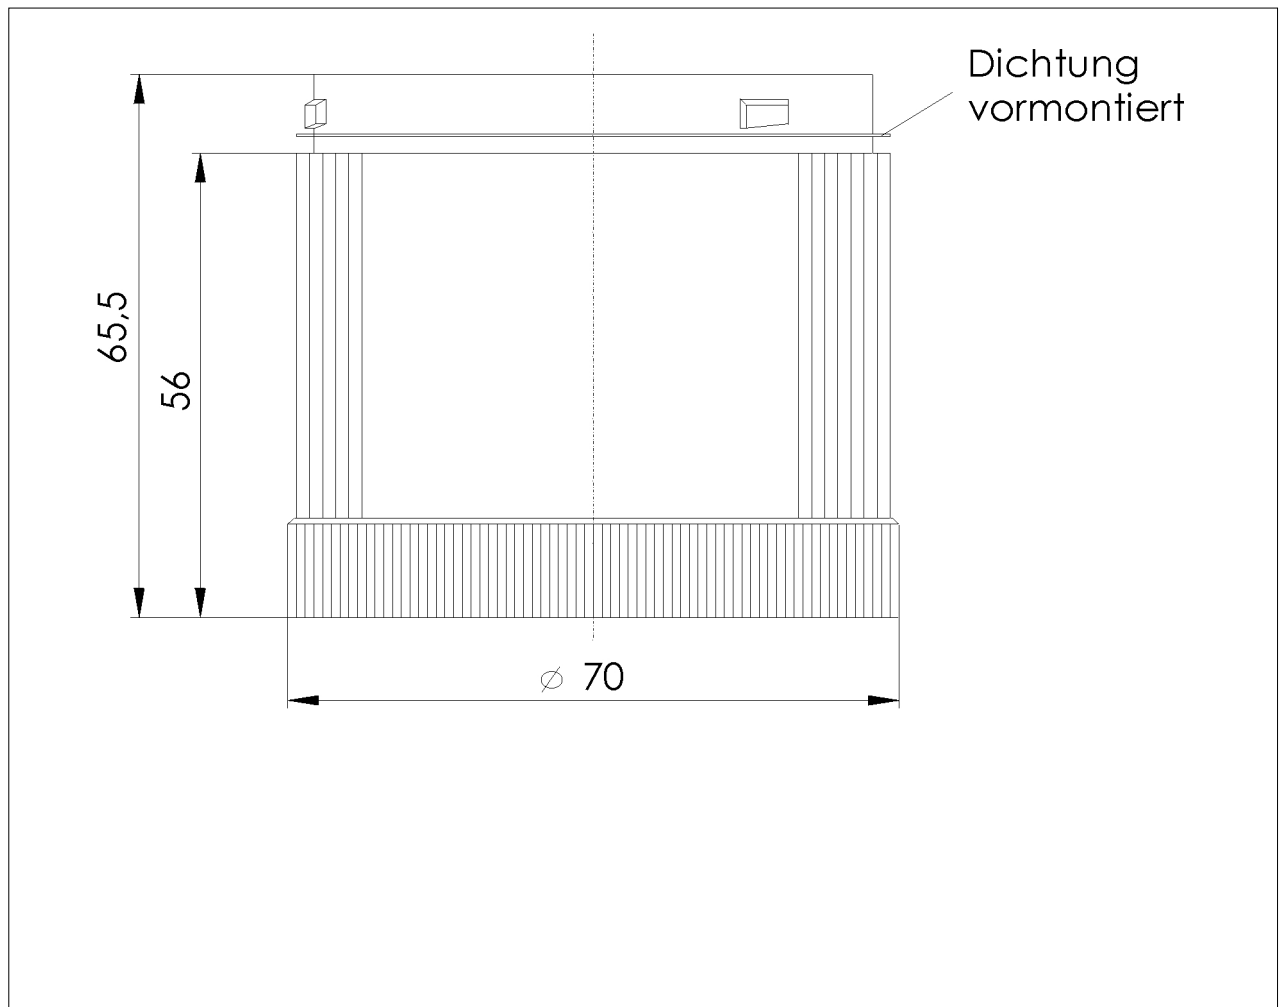

	Erstellt	Geprüft	Freigegeben		
Name	B. Walter	S. Neumann	H. Elsäßer	Data sheet-No.	000 841 501
Datum:	16.01.1998	16.01.1998	19.01.1998		Page 1 of 1