

Technical specification:

Housing material: PC/ABS, PC, black
 Audio frequency: approx. 2,1kHz
 Volume: 80 dB(A)/1m at 2,1kHz
 Tone type: Continuous or pulsating tone with approx. 1 Hz
 Duty cycle: 100 %
 Fixing: Central for hole 22,5mmØ with Anti-twisting
 Terminal: Connector with terminal screw max. 1,5mm², M3 terminal screw
 Weight approx.: 24V=44g /115V=47g /230V=49g
 Temperature: -20° ... +50 °C
 Working life: >5000h
 Protection rating: IP65 (after installation) IP54 (bracket mounting)
 Regulations: Conform to current EC-regulations. UL-listed.

Further specifications:

Order-No.	Operating Voltage	Rated current
109 0#0 75	24V±20% DC (AC) ⇔	25mA
109 0#0 77	115V±10% DC (AC) ⇔	25mA
109 0#0 68	230V±10% DC (AC) ⇔	25mA

↑
0: continuous tone 1: pulsating tone


Special parts:

975 109 01	Bracket with protective cap
975 109 02	On wall-housing
975 109 03	Double on wall-housing
975 109 04	Triple on wall-housing

Characteristic features:

Without sound output holes

All specifications refer to Unenn and room temperature !

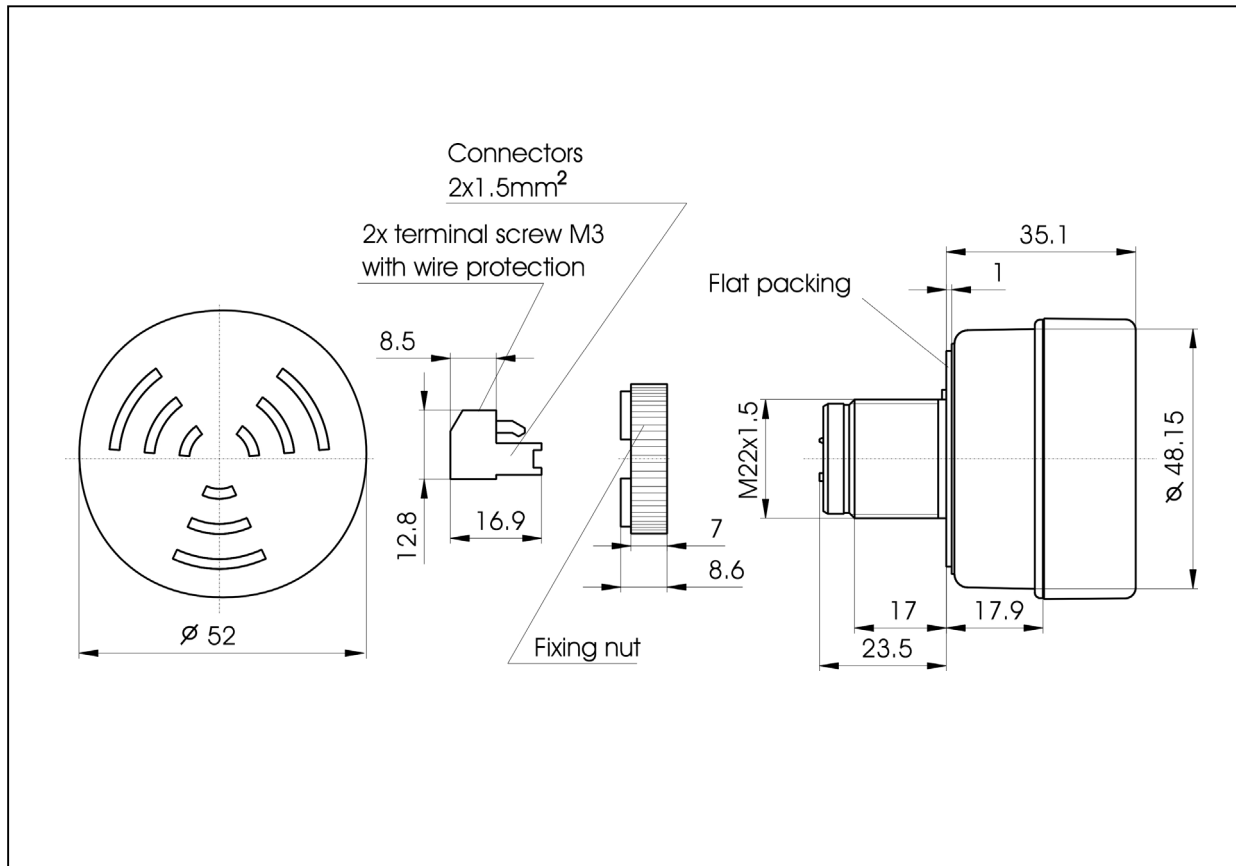

	Drawn up	proved	released	Data-sheet-No.
Name	E. Rudischhauser	S. Rudischhauser	H. Elsäßer	000 109 502
Date	2001-11-07	2001-11-07	2001-11-09	Page 1 of 1