



TEMPERATURE MONITORING RELAY FOR PT100,
EXCEEDING OF 1 THRESH. VAL.,
WIDTH 22ND5 MM 0 C - 200 C,
24V AC/DC 1 NO + 1 NC,
CLOSED-CIRC.PRINC. SCREW CONNECTION

General technical details:

type of voltage		AC/DC
Supply voltage frequency		
<ul style="list-style-type: none"> • 1 / for auxiliary and control current circuit <ul style="list-style-type: none"> • initial rated value • final rated value • 1 / at 50 Hz / for AC / rated value • 1 / at 60 Hz / for AC / rated value • 1 / for DC / rated value 	Hz	50
	Hz	60
	V	24
	V	24
	V	24
Number of measuring circuits		1
Product function		
<ul style="list-style-type: none"> • defect storage • reset external 		No
		No
Measurable temperature		
<ul style="list-style-type: none"> • initial value • final value 	°C	0
	°C	200
Item designation / according to DIN EN 61346-2		K
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K
ambient temperature		
<ul style="list-style-type: none"> • during the operating phase 	°C	-25 ... 60

Mechanical design:

Design of the electrical connection

- for auxiliary and control current circuit
- jumper socket

screw-type terminals

Yes

Design of the sensor / connectable

PT100 (resistance sensor)

Number of NC contacts / for auxiliary contacts

1

Number of NO contacts / for auxiliary contacts

1

Number of change-over switches / for auxiliary contacts

0

Width

mm

22.5

Height

mm

83

Depth

mm

91

Certificates/approvals:

General Product Approval

[CQC](#)

[ROSTEST](#)



Test Certificates

[Manufacturer](#)

other

[Manufacturer](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RS1000-1CD20/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RS1000-1CD20

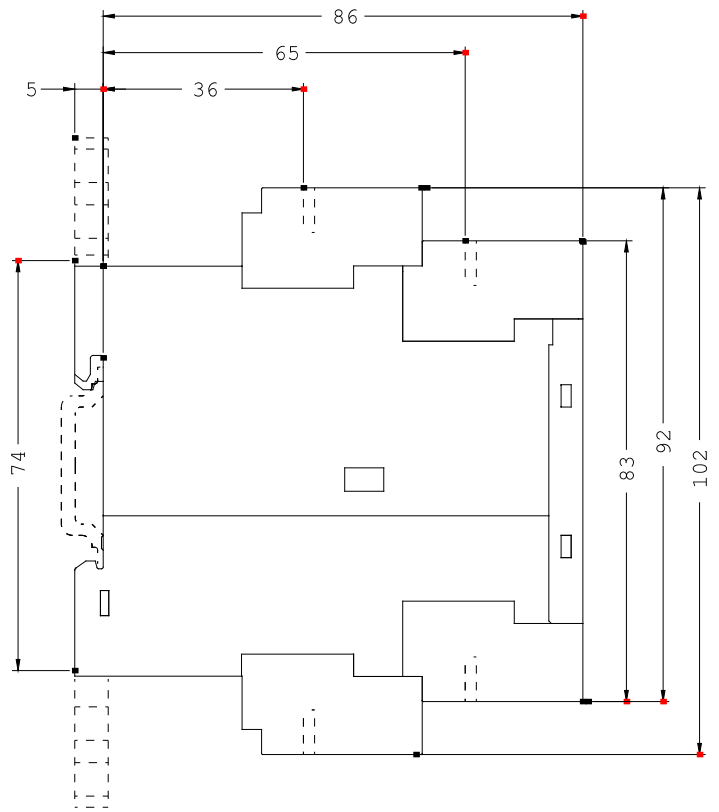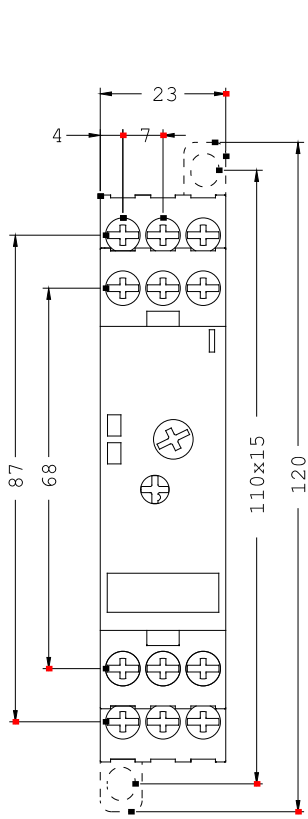

last change:

May 9, 2011