



shunt trip left 208-277 V AC 50/60 Hz 220-250 V DC accessory for: 3VA1; 3VA20-26

| Model | | |
|--|-------------------|-------------------|
| product brand name | SENTRON | |
| accessories | Auxiliary release | |
| General technical data | | |
| degree of pollution | 3 | |
| overvoltage category | III | |
| apparent power consumption / maximum | 40 VA | |
| consumed active power / at DC / maximum | 35 W | |
| Voltage | | |
| surge voltage resistance | 4 kV | |
| Mechanical Design | | |
| height | 65.1 mm | |
| width | 25.7 mm | |
| number of slots | 3 | |
| depth | 31.2 mm | |
| net weight | 91 g | |
| tightening torque / with screw-type terminals / minimum | 0.4 N·m | |
| tightening torque / with screw-type terminals / maximum | 0.5 N·m | |
| Connections according IEC | | |
| stripped length | 10 mm | |
| connectable conductor cross-section | 0.5 ... 1.5 | |
| <ul style="list-style-type: none"> • minimum • maximum | | |
| AWG number / as coded connectable conductor cross section / for auxiliary contacts | | |
| <ul style="list-style-type: none"> • minimum • maximum | 20 16 | |
| Connections according UL | | |
| stripped length [in] | 0.4 in | |
| tightening torque [lbf·in] / with screw-type terminals / minimum | 3.5 lbf·in | |
| tightening torque [lbf·in] / with screw-type terminals / maximum | 4.4 lbf·in | |
| Certificates | | |
| General Product Approval | EMV | Test Certificates |



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Environment

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BL33>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BL33>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BL33


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

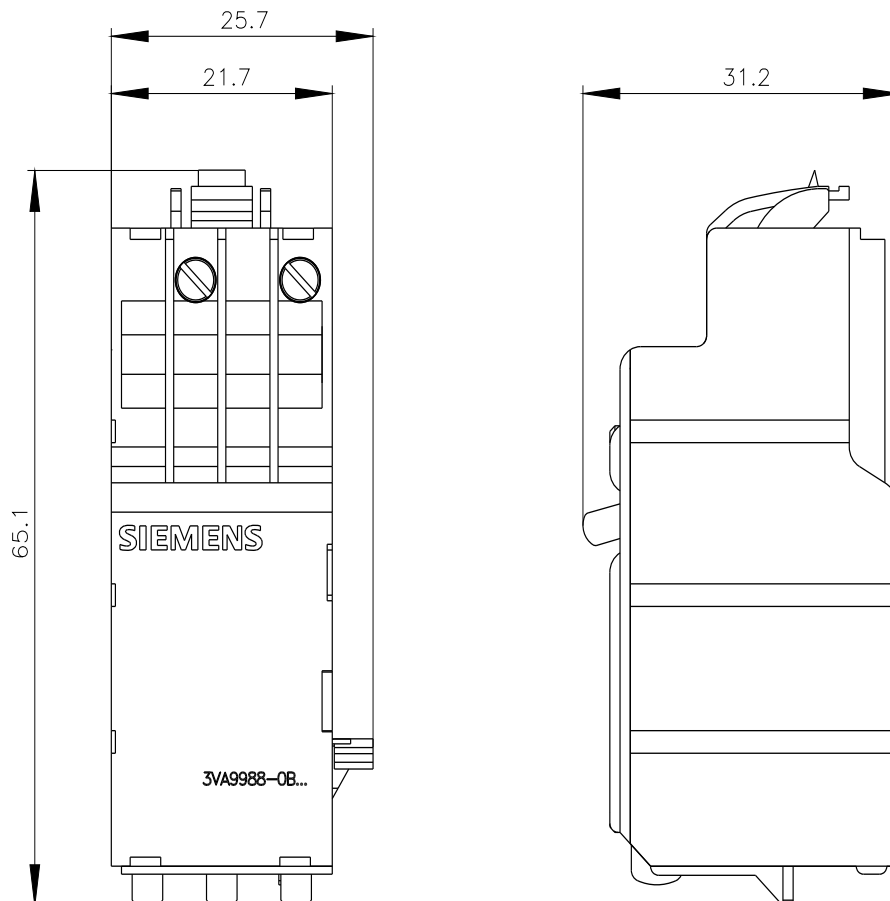

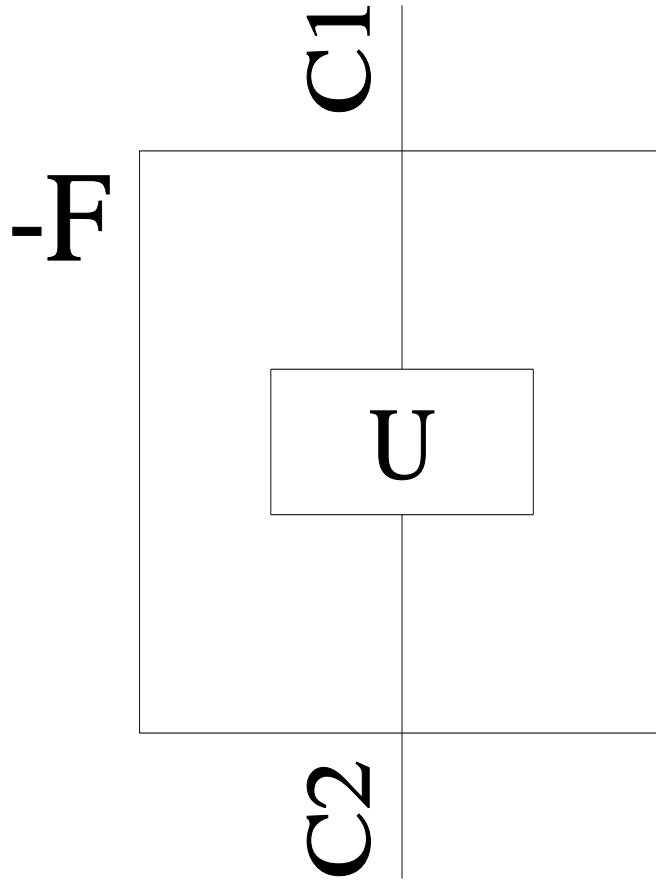

last modified:

12/20/2020 [↗](#)

