

# Rittal – The System.

Faster – better – everywhere.



## SK 3243.700 Blue e+ filter fan

State: 6/13/2024 (Source: [rittal.com/us-en](http://rittal.com/us-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# SK 3243.700 - Blue e+ filter fan

Complete fan unit for tool-free mounting on surfaces. Air throughput from 11 - 682.75 cfm, protection category IP 54 as standard.

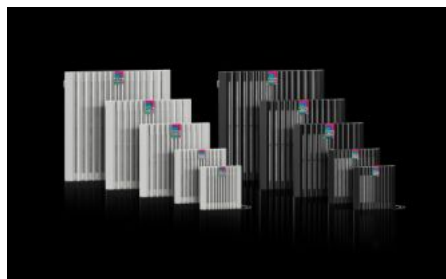

## Features

Model No.	SK 3243.700
Product description	Filter fans with diagonal fan technology are more pressure-resistant and produce more constant air performance. The diagonal outflow direction ensures a more uniform heat dissipation from the enclosure.
Benefits	Highest airflow through pleated filter in delivery condition Easy filter change thanks to a new opening mechanism on the louvre grille Faster assembly on the enclosure due to optimized snap hooks Diagonal fan technology ensures more uniform and consistent ventilation of the control cabinet through higher pressure stability. Tool-free mounting
Color	RAL 7035
Supply includes	Complete unit ready to install, including folded filter
Fan	Diagonal, 1~ capacitor motor
Unimpeded air flow (with fleece filter)	At 50 Hz: 540 m <sup>3</sup> /h At 60 Hz: 590 m <sup>3</sup> /h At 50 Hz: 317.8 cfm At 60 Hz: 347.3 cfm
Unimpeded air flow (with folded filter)	At 50 Hz: 625 m <sup>3</sup> /h At 60 Hz: 716 m <sup>3</sup> /h At 50 Hz: 367.86 cfm At 60 Hz: 421.42 cfm

# Features

Airflow with corresponding outlet filter including fleece filter	At 50 Hz: 444 m <sup>3</sup> /h At 60 Hz: 498 m <sup>3</sup> /h At 50 Hz: 261.33 cfm At 60 Hz: 293.11 cfm
Airflow with corresponding outlet filter including pleated filter	At 50 Hz: 565 m <sup>3</sup> /h At 60 Hz: 645 m <sup>3</sup> /h At 50 Hz: 332.55 cfm At 60 Hz: 379.63 cfm
Rated operating voltage	230 V, 1~, 50 Hz/60 Hz
Rated power Pel	At 50 Hz: 77.7 W At 60 Hz: 106.4 W
Rated current max.	At 50 Hz: 0.39 A At 60 Hz: 0.47 A
Dimensions	Width: 323 mm Height: 323 mm Depth: 144.5 mm Width: 12.7 " Height: 12.7 " Depth: 5.69 "
Installation depth	124 mm 4.88 "
Mounting cut-out	Width of opening: 292 mm Cut-out height: 292 mm Width of opening: 11.5 " Cut-out height: 11.5 "
Protection category IP to IEC 60529	IP54 with fleece filter/folded filter IP 55 with folded filter and absorber mat IP56 with fleece filter/folded filter and hose-proof hood
Protection category NEMA	Type 12 with fleece filter/folded filter Type 3, 3R, 4, 4X with fleece filter/folded filter and hose-proof hood
Pre-fuse	Miniature circuit-breaker/fuse: 4 A
Note	For the 3237.XXX filter fan, the electrical connection is made via 2 individual wires (length approx. 300 mm) on the unit, for all other filter fans, it's made via a spring-loaded terminal

# Features

---

Operating temperature range	-30 °C...55 °C -22 °F...131 °F
Storage temperature range	-30 °C...70 °C -22 °F...158 °F
Noise pressure level	At 50 Hz: 62 dB(A) At 60 Hz: 65 dB(A)
Weight/packaging unit	3.12 kg 6.9 lb.
Packaging unit	1 pc(s).
Customs tariff number	84145915
EAN	4028177997981
ETIM 8	EC000320
ETIM 7.0	EC000320
ECLASS 8.0	27180716

---

# Approvals

---

Approvals	UR + C-UR (recognized)
-----------	------------------------