

Rittal – The System.

Faster – better – everywhere.

Polycarbonate enclosures PK without knockouts – PK 9523.100

Date : May 9, 2017

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Polycarbonate enclosures PK without knockouts – PK 9523.100

created: 09.05.2017 on www.rittal.com/com-en

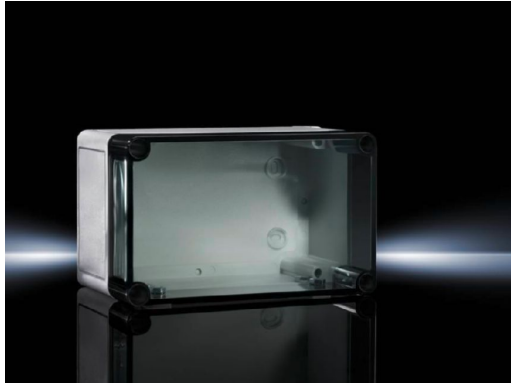

Product description

Applications: Ambient temperature range: -35°C...+80°C
The specified temperatures may be limited by the installed equipment

Material: Housing: Fibre-glass reinforced polycarbonate
Cover transparent: Polycarbonate, all-round foamed-in PU seal
Cover screws: Polyamide
Insulating bungs: Polyethylene

Colour: RAL 7035

**Protection category
IP to IEC 60 529:** IP 66

**Protection category
NEMA:** NEMA 4X

Supply includes: Enclosure with cover
Cover screws
Insulating bungs for wall mounting screws

Basic material: Polycarbonate

Product features

Dimensions: Width: 360 mm
Height: 254 mm
Depth: 111 mm

Cover: transparent

Ambient temperature range:	-35°C...+80°C
Packs of:	1 pc(s).
Weight/pack:	1.5 kg
Customs tariff number:	94037000
ETIM 6.0:	EC000261
ETIM 5.0:	EC002600
eCl@ss 8.0/8.1:	27180101
eCl@ss 7.0/7.1:	27180101
eCl@ss 6.0/6.1:	27180101
eCl@ss 5.1/5.1.4:	27180102
Product description (long):	PK Polycarbonate enclosure, WHD: 360x254x111 mm, fibreglass-reinforced polycarbonate, without knockouts, with transparent cover
Approvals	
Approvals:	Bureau Veritas C-UL UL
Declarations:	Declaration of conformity