


CIRCUIT-BREAKER VL160X N STANDARD BREAKING CAPACITY
 ICU=55KA / 415 V AC 3 POLE, NON-AUTOMATIC OVERCURRENT
 RELEASE MAGNETIC IN=100A, RATED CURRENT II=1800A,
 SHORT CIRCUIT

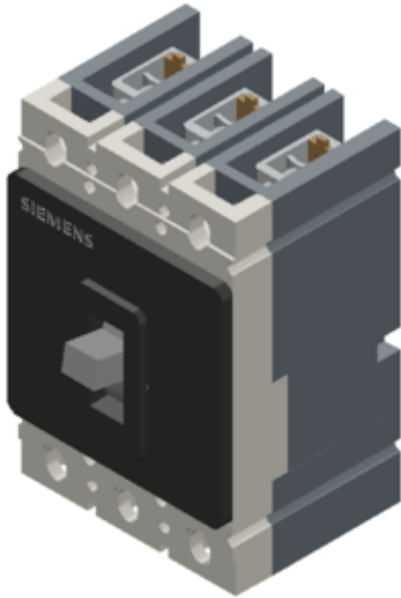

Model	
Type of the driving mechanism / motor drive	No
Design of the overcurrent release	M
General technical data	
Number of poles	3
Size of the circuit-breaker	3VL1
Electrical endurance (switching cycles) / typical	10 000
Usage category	A
Performance class for circuit breaker	N
Mechanical service life (switching cycles) / typical	20 000
Equipment marking / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750	Q
Operating frequency / maximum	120 1/s
Voltage	
Rated operational voltage U _e / max.	690 V
Insulation voltage	
• rated value	800 V
• at AC / rated value	800 V

Surge voltage resistance / rated value	8 kV
Protection class	
Protection class IP	IP20
Protective function of the overcurrent release	I
Dissipation	
Power loss [W]	
• maximum	13 W
Electricity	
Continuous current / rated value	100 A
Derating temperature / for the rated value of the continuous current	50 °C
Adjustable pick-up value current	
• of instantaneous short-circuit trip unit / initial value	1 800 A
• of instantaneous short-circuit trip unit / Full-scale value	1 800 A
Main circuit	
Operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Operating voltage	
• for main current circuit / at AC / at 50 Hz / maximum	690 V
• for main current circuit / at AC / at 60 Hz / maximum	690 V
• for main current circuit / at DC / maximum	500 V
Operating current	
• at 40 °C / rated value	100 A
• at 50 °C / rated value	100 A
• at 55 °C / rated value	93 A
• at 60 °C / rated value	93 A
• at 65 °C / rated value	86 A
• at 70 °C / rated value	86 A
Suitability	
Suitability for use	non-automatic circuit-breakers
Product details	
Product component	
• Trip indicator	Yes
• Auxiliary switch	Yes
• Voltage trigger	No

• undervoltage release	No
• undervoltage release with leading contact	No
Product extension / optional / motor drive	Yes

Product function

Product function	
• of thermal overload trip unit	without
• Ground fault protection	No
• for neutral conductors / Short-circuit and overload proof	No
• Overload protection	No

Short circuit

Operational short-circuit current breaking capacity (Ics)	
• at 240 V / rated value	65 kA
• at 415 V / rated value	55 kA
• at 500 V / rated value	14 kA
• at 690 V / rated value	4 kA
Maximum short-circuit current breaking capacity (Icu)	
• at 240 V / rated value	65 kA
• at 415 V / rated value	55 kA
• at 440 V / rated value	25 kA
• at 480 V / acc. to NEMA / rated value	25 kA
• at 500 V / rated value	18 kA
• at 600 V / acc. to NEMA / rated value	8 kA
• at 690 V / rated value	8 kA

Connections

Arrangement of electrical connectors / for main current circuit	front side
Type of electrical connection / for main current circuit	box terminals

Mechanical Design

Height	157.5 mm
Width	104.5 mm
Depth	106.5 mm
Mounting type	fixed mounting

Environmental conditions

Ambient temperature	
• during operation / minimum	0 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C

Certificates

Certificate of suitability IEC, standard switching capacity (N)

Equipment marking

- acc. to DIN EN 61346-2

Q

General Product Approval

EMC

Declaration of Conformity



CCC

[sonstig](#)

[TSE](#)

[KTL](#)



C-Tick



EG-Konf.

Test Certificates

Shipping Approval

[spezielle](#)

[Prüfbescheinigung](#)

[n](#)



ABS



BUREAU VERITAS



LRS



PRS



RINA

Shipping Approval

other



RMRS

[Bestätigungen](#)

[Umweltbestätigung](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VL1710-1DE33-0AD1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VL1710-1DE33-0AD1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL1710-1DE33-0AD1

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>