

Similar to image

General technical data:		
Ambient temperature / during the operating phase	°C	-25 ... 70
Number of poles		3
Product function		
<ul style="list-style-type: none"> • of the thermal overload release 		adjustable
Protection class IP		IP20
Design of the overcurrent release		TM
Derating temperature / for the rated value of the continuous current	°C	50
<ul style="list-style-type: none"> • acc. to UL 489 	°C	40
Item designation		
<ul style="list-style-type: none"> • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		Q
<ul style="list-style-type: none"> • according to DIN EN 61346-2 		Q

Main circuit:		
Continuous current / rated value	A	125
Adjustable response current		
<ul style="list-style-type: none"> • of the current-dependent overload release 	/ A	125
Operating voltage / for main current circuit		
<ul style="list-style-type: none"> • at 50 Hz / for AC / maximum 	V	690
<ul style="list-style-type: none"> • at 60 Hz / for AC / maximum 	V	690
<ul style="list-style-type: none"> • at 50 Hz / for AC / acc. to UL 489 / maximum 	V	600
<ul style="list-style-type: none"> • at 60 Hz / for AC / acc. to UL 489 / maximum 	V	600
<ul style="list-style-type: none"> • for DC / acc. to UL 489 / maximum 	V	250

Auxiliary circuit:		
Number of change-over switches / for auxiliary contact		0

Short-circuit:		
Breaking capacity limit short-circuit current (I_{cu})		
<ul style="list-style-type: none"> • at 415 V / rated value 	kA	40

Installation/mounting/dimensions:		
Type of fixing/fixation		fixed mounting

Connections:

Design of the electrical connection

- for main current circuit

box terminals

Arrangement of electrical connectors

- for main current circuit

front side

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WWW/view/en/3VL1712-1DD33-..../all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL1712-1DD33-....

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

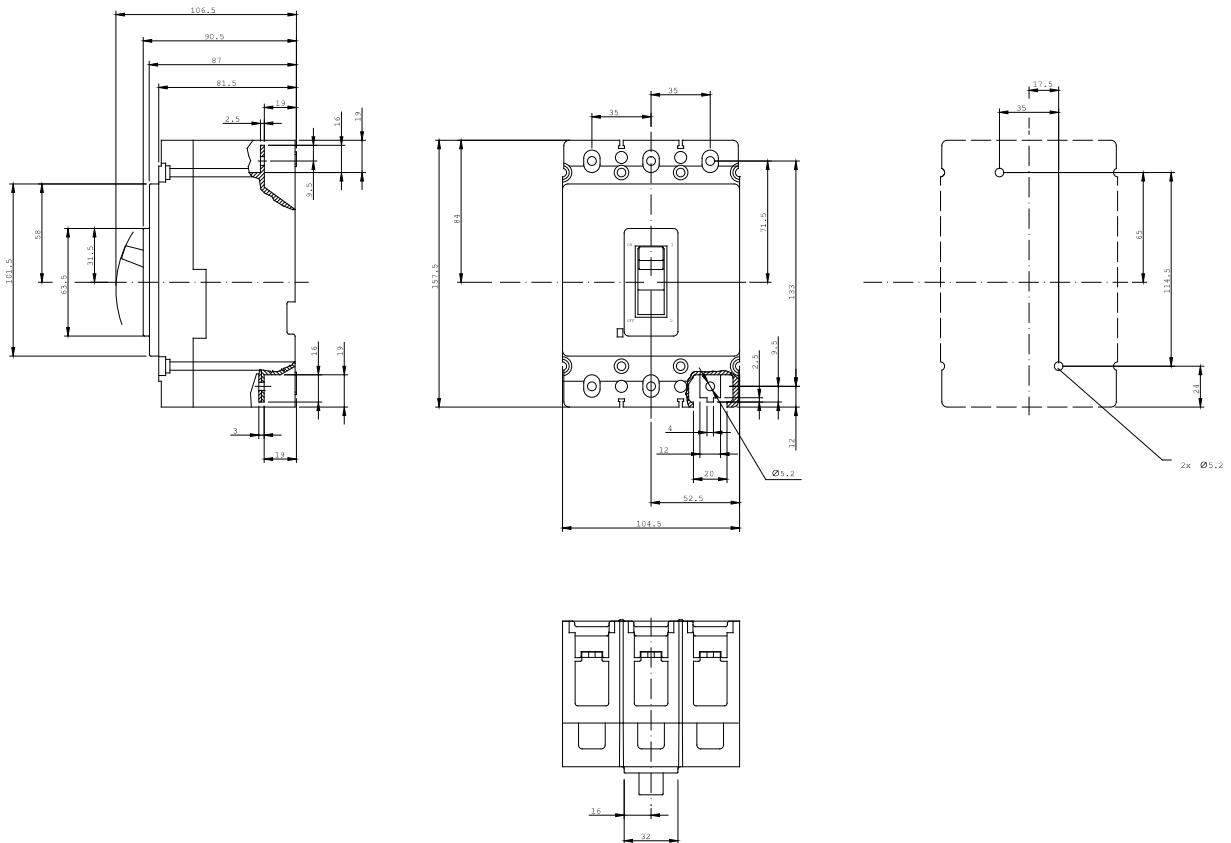

last change:

Jun 14, 2010