



Figure similar

MLFB-Ordering data

6SL3210-1PE21-4UL0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

| Rated data | | General tech. specifications | |
|-------------------------------------|--------------------------|---|-------------------------------------|
| Input | | Power factor λ | 0.85 |
| Number of phases | 3 AC | Offset factor $\cos \phi$ | 0.95 |
| Line voltage | 380 ... 480 V $\pm 10\%$ | Efficiency η | 0.97 |
| Line frequency | 47 ... 63 Hz | Sound pressure level (1m) | 72 dB |
| Rated current (LO) | 17.20 A | Power loss | 0.15 kW |
| Rated current (HO) | 15.30 A | Ambient conditions | |
| Output | | Cooling | Internal air cooling |
| Number of phases | 3 AC | Cooling air requirement | 0.009 m ³ /s |
| Rated voltage | 400 V | Installation altitude | 1000 m |
| Rated power (LO) | 5.50 kW / 7.50 hp | Ambient temperature | |
| Rated power (HO) | 4.00 kW / 5.00 hp | Operation LO | -5 ... 40 °C (23 ... 104 °F) |
| Rated current (LO) | 13.20 A | Operation HO | -5 ... 50 °C (23 ... 122 °F) |
| Rated current (HO) | 10.20 A | Transport | -40 ... 70 °C (-40 ... 158 °F) |
| Max. output current | 20.40 A | Storage | -25 ... 55 °C (-13 ... 131 °F) |
| Pulse frequency | 4 kHz | Relative humidity | |
| Output frequency for vector control | 0 ... 200 Hz | Max. operation | 95 % RH, condensation not permitted |
| Output frequency for V/f control | 0 ... 550 Hz | | |

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s



Figure similar

MLFB-Ordering data

6SL3210-1PE21-4UL0


Mechanical data

| | |
|----------------------|----------|
| Degree of protection | IP20 |
| Size | FSB |
| Net weight | 2.90 kg |
| Width | 100.0 mm |
| Height | 292.0 mm |
| Depth | 165.0 mm |

Converter losses to EN 50598-2*

| | |
|------------------|-----|
| Efficiency class | IE2 |
|------------------|-----|

Comparison with the reference converter (90% / 100%) -66.56 %

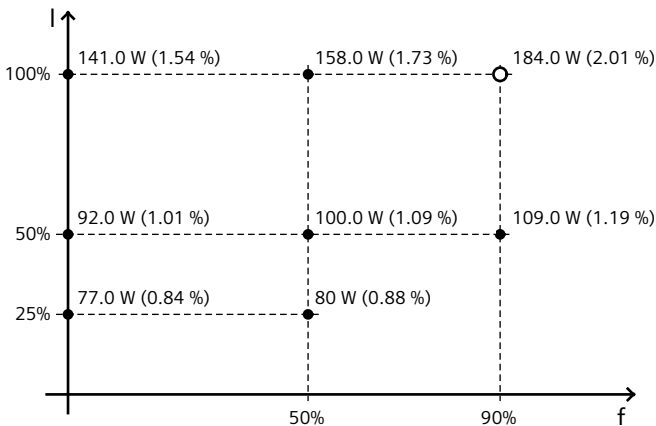

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values; increased by 10% according to the standard

Connections

Line side

Version Plug-in screw-type terminals

Conductor cross-section 1.50 ... 6.00 mm²

Motor end

Version Plug-in screw terminals

Conductor cross-section 1.50 ... 6.00 mm²

Max. motor cable length

Shielded 50 m

Unshielded 100 m

Standards

Compliance with standards UL, cUL, CE, C-Tick (RCM), SEMI F47

CE marking Low-voltage directive 2006/95/EC